Shape representation by skeletonization

Kálmán Palágyi
Dept. Image Processing and Computer Graphics
University of Szeged

Syllabus

- Shape
- Shape features
- Skeleton
- Skeletonization
- Applications

Shape

It is a fundamental concept in computer vision.

It can be regarded as the basis for high-level image processing stages concentrating on scene analysis and interpretation.

Shape

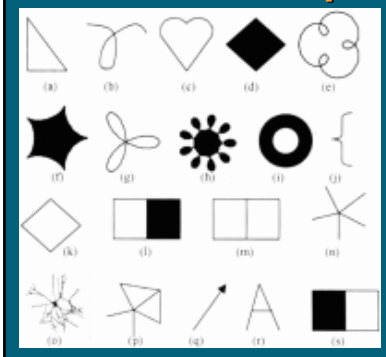

It is formed by any connected set of points.

L.F. Costa, R. Marcondes, 2001

The generic model of a modular machine vision system

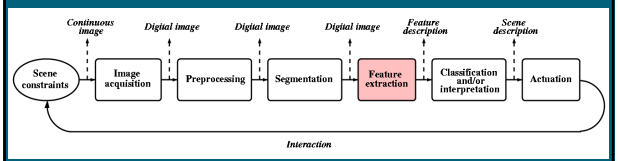

G.W. Awcock, R. Thomas, 1996

Feature extraction – shape representation

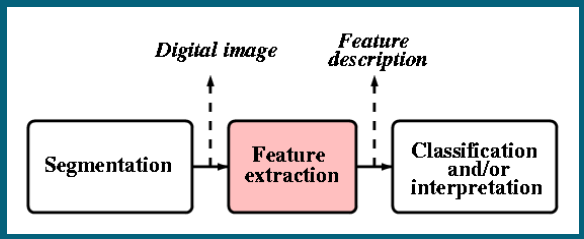

G.W. Awcock, R. Thomas, 1996

Syllabus

- Shape
- Shape features
- Skeleton
- Skeletonization
- Applications

Shape representation

- to apply a **transform** in order to represent an object in terms of the transform coefficients,
- to describe the **boundary** that surrounds an object,
- to describe the **region** that is occupied by an object.

Transform-based shape representation

- Fourier description (2D)
- Description based on spherical harmonics (3D)
- wavelet-based analysis
- scale-space / multiscale characterization
- …

Contour-based shape representation

- chain-code
- run-length
- polygonal approximation
- syntactic primitives
- spline
- snake / active contour
- multiscale primitives
- …

Region-based shape representation

- polygon
- Voronoi / Delaunay
- quadtree
- morphological decomposition
- convex hull / deficiency
- run-length
- distance transform
- skeleton
- …

Region-based shape representation

- polygon
- Voronoi / Delaunay
- quadtree
- morphological decomposition
- convex hull / deficiency
- run-length
- distance transform
- skeleton
- …

Syllabus

- Shape
- Shape features
- Skeleton
- Skeletonization
- Applications

Skeleton

- *result of the Medial Axis Transform:* object points having at least two closest boundary points;
- *praire-fire analogy:* the boundary is set on fire and skeleton is formed by the loci where the fire fronts meet and quench each other;
- the locus of the centers of all the maximal inscribed hyper-spheres.

Nearest boundary points and inscribed hyper-spheres

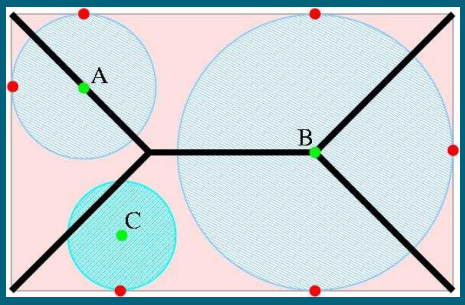

Fire-front propagation

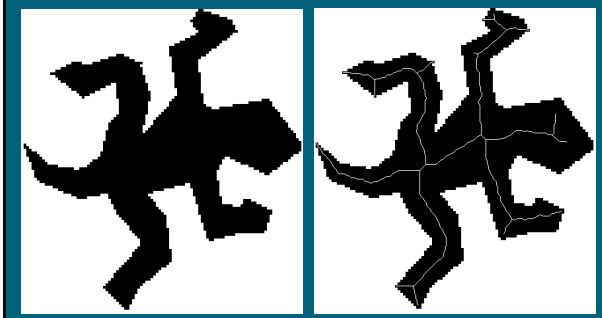

Object = union of the maximal inscribed hyper-spheres

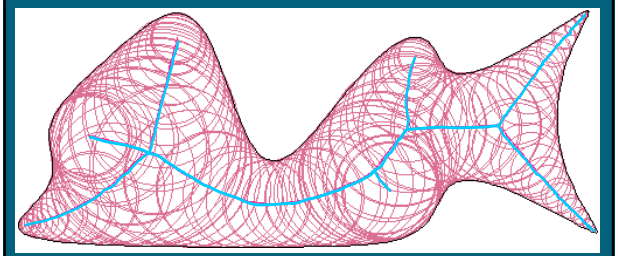

object boundary maximal inscribed disks centers

Object = union of the maximal inscribed hyper-spheres

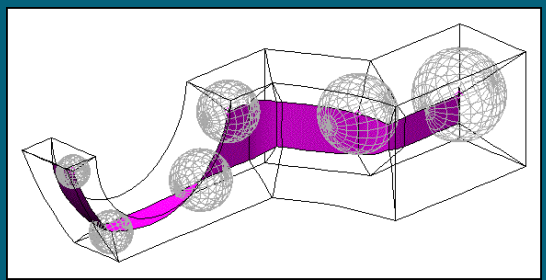

Skeleton in 3D

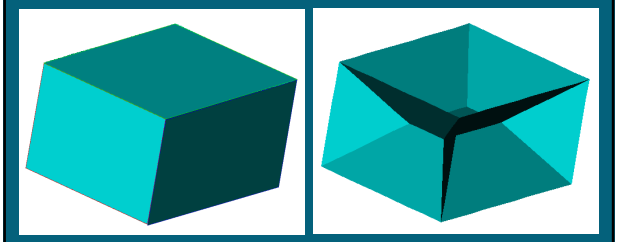

The skeleton in 3D generally contains 2D segments

Properties

- represents
  - the general form of an object,
  - the topological structure of an object, and
  - local object symmetries.
- invariant to
  - translation,
  - rotation, and
  - (uniform) scale change.
- simplified and thin.

2D skeletons

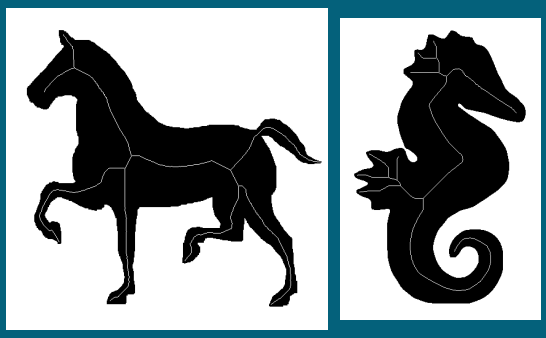

3D skeletons

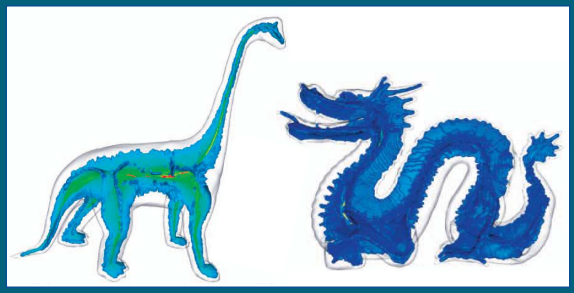

D. Reniers, J.J. van Wijk, A. Telea

Syllabus

- Shape
- Shape features
- Skeleton
- Skeletonization
- Applications

Skeletonization …

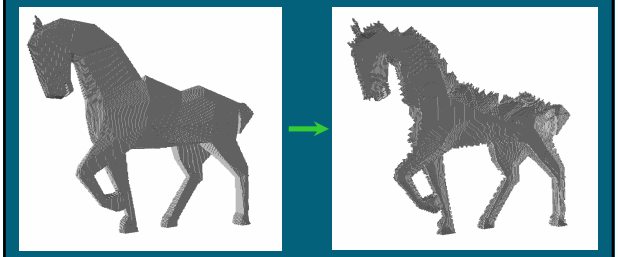

… means skeleton extraction from elongated binary objects.

Skeleton-like descriptors in 3D

original





medial surface

medial lines





topological kernel

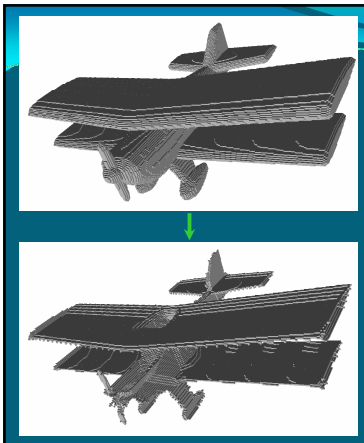

Example of medial surfaces

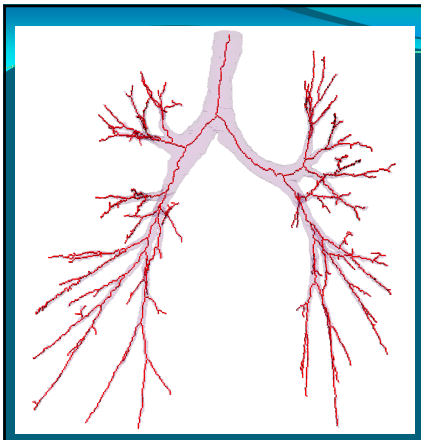

Example of medial lines

Skeletal points in 2D / 3D centerlines



Example of topological kernel

"If you would know what the Lord God thinks of money, you have only to look at those to whom he gives it."

(Maurice Baring)



original image

topological kernel

Example of topological kernel



simply connected → an isolated point

multiply connected → closed curve

Skeletonization techniques

- distance transform
- Voronoi diagram
- thinning

Distance transform

Input:
Binary array *A* containing feature elements (1's) and non-feature elements (0's).

Output:
Distance map *B*: non-binary array containing the distance to the closest feature element.

Distance map



Distance transform

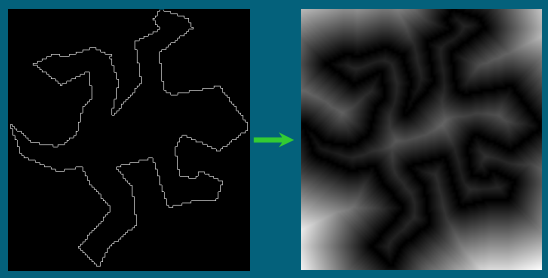

input (binary) output (non-binary)

Distance transform using city-block (or 4) distance

4	3	2	1	2	3	4
3	2	1	0	1	2	3
2	1	0	1	0	1	2
2	1	0	1	1	0	1
1	0	1	2	2	1	0
1	0	1	2	3	2	1
0	1	2	3	4	3	2

	1	
1	0	1
	1	

Distance transform using chess-board (or 8) distance

2	2	1	1	1	2	2
2	1	1	0	1	1	2
2	1	0	1	0	1	1
1	1	0	1	1	0	1
1	0	1	1	1	1	0
1	0	1	2	2	1	1
0	1	1	2	2	2	2

1	1	1
1	0	1
1	1	1

Linear-time distance mapping

Input:
Binary array *A* containing feature elements (1's) and non-feature elements (0's).

Output:
Distance map *B*: non-binary array containing the distance to the closest feature element.

G. Borgefors, 1984

```
remark initialization
 for i=1 to n1 do
  for j=1 to n2 do
   if a(i,j)=1 then b(i,j)=0
   else             b(i,j)=∞
remark forward scan
 for i=1 to n1 do
  for j=1 to n2 do
   b(i,j)=min{
               b(i-1,j-1)+d2,
               b(i-1,j  )+d1,
               b(i-1,j+1)+d2,
               b(i  ,j-1)+d1,
               b(i  ,j  )
              }
remark backward scan
 for i=n1 downto 1 do
  for j=n2 downto 1 do
   b(i,j)=min{
               b(i  ,j  )   ,
               b(i  ,j+1)+d1,
               b(i+1,j-1)+d2,
               b(i+1,j  )+d1,
               b(i+1,j+1)+d2
              }
```


Linear-time distance mapping

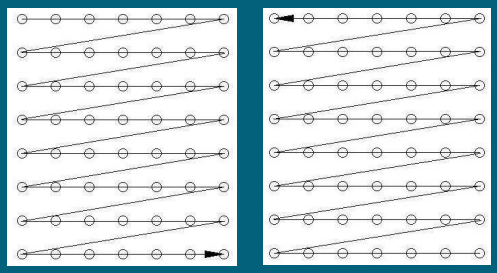

forward scan backward scan

Linear-time distance mapping

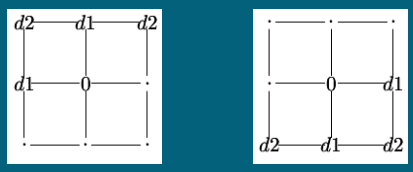

forward scan backward scan

best choice: $d1=3$, $d2=4$

(3,4)-chamfer distance mapping

0	0	0	0
0	0	1	0
0	0	0	0
0	0	0	0
0	1	0	0
0	0	0	0

input (feature)

.	.	.	.
.	.	0	.
.	.	.	.
.	.	.	.
.	0	.	.
.	.	.	.

initialization („.” → ∞)

(3,4)-chamfer distance mapping

0	0	0	0
0	0	1	0
0	0	0	0
0	0	0	0
0	1	0	0
0	0	0	0

input (feature)

.	.	.	.
.	.	0	.
.	.	.	.
.	.	.	.
.	0	.	.
.	.	.	.

forward scan

(3,4)-chamfer distance mapping

0	0	0	0
0	0	1	0
0	0	0	0
0	0	0	0
0	1	0	0
0	0	0	0

input (feature)

.	.	.	.
.	.	0	.
.	.	.	.
.	.	.	.
.	0	.	.
.	.	.	.

forward scan

(3,4)-chamfer distance mapping

0	0	0	0
0	0	1	0
0	0	0	0
0	0	0	0
0	1	0	0
0	0	0	0

input (feature)

.	.	.	.
.	.	0	.
.	.	.	.
.	.	.	.
.	0	.	.
.	.	.	.

forward scan

(3,4)-chamfer distance mapping

0	0	0	0
0	0	1	0
0	0	0	0
0	0	0	0
0	1	0	0
0	0	0	0

input (feature)

.	.	.	.
.	.	0	.
.	.	.	.
.	.	.	.
.	0	.	.
.	.	.	.

forward scan

(3,4)-chamfer distance mapping

0	0	0	0
0	0	1	0
0	0	0	0
0	0	0	0
0	1	0	0
0	0	0	0

input (feature)

.	.	.	.
.	.	0	.
.	.	.	.
.	.	.	.
.	0	.	.
.	.	.	.

forward scan

(3,4)-chamfer distance mapping

0	0	0	0
0	0	1	0
0	0	0	0
0	0	0	0
0	1	0	0
0	0	0	0

input (feature)

.	.	.	.
.	.	0	.
.	.	.	.
.	.	.	.
.	0	.	.
.	.	.	.

forward scan

(3,4)-chamfer distance mapping

0	0	0	0
0	0	1	0
0	0	0	0
0	0	0	0
0	1	0	0
0	0	0	0

input (feature)

.	.	.	.
.	.	0	.
.	.	.	.
.	.	.	.
.	0	.	.
.	.	.	.

forward scan

(3,4)-chamfer distance mapping

0	0	0	0
0	0	1	0
0	0	0	0
0	0	0	0
0	1	0	0
0	0	0	0

input (feature)

.	.	.	.
.	.	0	3
.	.	.	.
.	.	.	.
.	0	.	.
.	.	.	.

forward scan

(3,4)-chamfer distance mapping

0	0	0	0
0	0	1	0
0	0	0	0
0	0	0	0
0	1	0	0
0	0	0	0

input (feature)

.	.	.	.
.	.	0	3
.	.	.	.
.	.	.	.
.	0	.	.
.	.	.	.

forward scan

(3,4)-chamfer distance mapping

0	0	0	0
0	0	1	0
0	0	0	0
0	0	0	0
0	1	0	0
0	0	0	0

input (feature)

.	.	.	.
.	.	0	3
.	4	.	.
.	.	.	.
.	0	.	.
.	.	.	.

forward scan

(3,4)-chamfer distance mapping

0	0	0	0
0	0	1	0
0	0	0	0
0	0	0	0
0	1	0	0
0	0	0	0

input (feature)

.	.	.	.
.	.	0	3
.	4	3	.
.	.	.	.
.	0	.	.
.	.	.	.

forward scan

(3,4)-chamfer distance mapping

0	0	0	0
0	0	1	0
0	0	0	0
0	0	0	0
0	1	0	0
0	0	0	0

input (feature)

.	.	.	.
.	.	0	3
.	4	3	4
.	.	.	.
.	0	.	.
.	.	.	.

forward scan

(3,4)-chamfer distance mapping

0	0	0	0
0	0	1	0
0	0	0	0
0	0	0	0
0	1	0	0
0	0	0	0

input (feature)

.	.	.	.
.	.	0	3
.	4	3	4
8	.	.	.
.	0	.	.
.	.	.	.

forward scan

(3,4)-chamfer distance mapping

0	0	0	0
0	0	1	0
0	0	0	0
0	0	0	0
0	1	0	0
0	0	0	0

input (feature)

.	.	.	.
.	.	0	3
.	4	3	4
8	7	.	.
.	0	.	.
.	.	.	.

forward scan

(3,4)-chamfer distance mapping

0	0	0	0
0	0	1	0
0	0	0	0
0	0	0	0
0	1	0	0
0	0	0	0

input (feature)

.	.	.	.
.	.	0	3
.	4	3	4
8	7	6	.
.	0	.	.
.	.	.	.

forward scan

(3,4)-chamfer distance mapping

0	0	0	0
0	0	1	0
0	0	0	0
0	0	0	0
0	1	0	0
0	0	0	0

input (feature)

.	.	.	.
.	.	0	3
.	4	3	4
8	7	6	7
.	0	.	.
.	.	.	.

forward scan

(3,4)-chamfer distance mapping

0	0	0	0
0	0	1	0
0	0	0	0
0	0	0	0
0	1	0	0
0	0	0	0

input (feature)

.	.	.	.
.	.	0	3
.	4	3	4
8	7	6	7
11	0	.	.
.	.	.	.

forward scan

(3,4)-chamfer distance mapping

0	0	0	0
0	0	1	0
0	0	0	0
0	0	0	0
0	1	0	0
0	0	0	0

input (feature)

.	.	.	.
.	.	0	3
.	4	3	4
8	7	6	7
11	0	.	.
.	.	.	.

forward scan

(3,4)-chamfer distance mapping

0	0	0	0
0	0	1	0
0	0	0	0
0	0	0	0
0	1	0	0
0	0	0	0

input (feature)

.	.	.	.
.	.	0	3
.	4	3	4
8	7	6	7
11	0	3	.
.	.	.	.

forward scan

(3,4)-chamfer distance mapping

0	0	0	0
0	0	1	0
0	0	0	0
0	0	0	0
0	1	0	0
0	0	0	0

input (feature)

.	.	.	.
.	.	0	3
.	4	3	4
8	7	6	7
11	0	3	6
.	.	.	.

forward scan

(3,4)-chamfer distance mapping

0	0	0	0
0	0	1	0
0	0	0	0
0	0	0	0
0	1	0	0
0	0	0	0

input (feature)

.	.	.	.
.	.	0	3
.	4	3	4
8	7	6	7
11	0	3	6
4	.	.	.

forward scan

(3,4)-chamfer distance mapping

0	0	0	0
0	0	1	0
0	0	0	0
0	0	0	0
0	1	0	0
0	0	0	0

input (feature)

.	.	.	.
.	.	0	3
.	4	3	4
8	7	6	7
11	0	3	6
4	3	.	.

forward scan

(3,4)-chamfer distance mapping

0	0	0	0
0	0	1	0
0	0	0	0
0	0	0	0
0	1	0	0
0	0	0	0

input (feature)

.	.	.	.
.	.	0	3
.	4	3	4
8	7	6	7
11	0	3	6
4	3	4	.

forward scan

(3,4)-chamfer distance mapping

0	0	0	0
0	0	1	0
0	0	0	0
0	0	0	0
0	1	0	0
0	0	0	0

input (feature)

.	.	.	.
.	.	0	3
.	4	3	4
8	7	6	7
11	0	3	6
4	3	4	7

forward scan

(3,4)-chamfer distance mapping

0	0	0	0
0	0	1	0
0	0	0	0
0	0	0	0
0	1	0	0
0	0	0	0

input (feature)

.	.	.	.
.	.	0	3
.	4	3	4
8	7	6	7
11	0	3	6
4	3	4	7

forward scan (completed)

(3,4)-chamfer distance mapping

.	.	.	.
.	.	0	.
.	.	.	.
.	.	.	.
.	0	.	.
.	.	.	.

initialization („.” → ∞)

.	.	.	.
.	.	0	3
.	4	3	4
8	7	6	7
11	0	3	6
4	3	4	7

forward scan (influence zone 1)

(3,4)-chamfer distance mapping

.	.	.	.
.	.	0	.
.	.	.	.
.	.	.	.
.	0	.	.
.	.	.	.

initialization („.” → ∞)

.	.	.	.
.	.	0	3
.	4	3	4
8	7	6	7
11	0	3	6
4	3	4	7

forward scan (influence zone 2)

(3,4)-chamfer distance mapping

0	0	0	0
0	0	1	0
0	0	0	0
0	0	0	0
0	1	0	0
0	0	0	0

input (feature)

.	.	.	.
.	.	0	3
.	4	3	4
8	7	6	7
11	0	3	6
4	3	4	7

backward scan

(3,4)-chamfer distance mapping

0	0	0	0
0	0	1	0
0	0	0	0
0	0	0	0
0	1	0	0
0	0	0	0

input (feature)

.	.	.	.
.	.	0	3
.	4	3	4
8	7	6	7
11	0	3	6
4	3	4	7

backward scan

(3,4)-chamfer distance mapping

0	0	0	0
0	0	1	0
0	0	0	0
0	0	0	0
0	1	0	0
0	0	0	0

input (feature)

.	.	.	.
.	.	0	3
.	4	3	4
8	7	6	7
11	0	3	6
4	3	4	7

backward scan

(3,4)-chamfer distance mapping

0	0	0	0
0	0	1	0
0	0	0	0
0	0	0	0
0	1	0	0
0	0	0	0

input (feature)

.	.	.	.
.	.	0	3
.	4	3	4
8	7	6	7
11	0	3	6
4	3	4	7

backward scan

(3,4)-chamfer distance mapping

0	0	0	0
0	0	1	0
0	0	0	0
0	0	0	0
0	1	0	0
0	0	0	0

input (feature)

.	.	.	.
.	.	0	3
.	4	3	4
8	7	6	7
11	0	3	6
4	3	4	7

backward scan

(3,4)-chamfer distance mapping

0	0	0	0
0	0	1	0
0	0	0	0
0	0	0	0
0	1	0	0
0	0	0	0

input (feature)

.	.	.	.
.	.	0	3
.	4	3	4
8	7	6	7
11	0	3	6
4	3	4	7

backward scan

(3,4)-chamfer distance mapping

0	0	0	0
0	0	1	0
0	0	0	0
0	0	0	0
0	1	0	0
0	0	0	0

input (feature)

.	.	.	.
.	.	0	3
.	4	3	4
8	7	6	7
11	0	3	6
4	3	4	7

backward scan

(3,4)-chamfer distance mapping

0	0	0	0
0	0	1	0
0	0	0	0
0	0	0	0
0	1	0	0
0	0	0	0

input (feature)

.	.	.	.
.	.	0	3
.	4	3	4
8	7	6	7
3	0	3	6
4	3	4	7

backward scan

(3,4)-chamfer distance mapping

0	0	0	0
0	0	1	0
0	0	0	0
0	0	0	0
0	1	0	0
0	0	0	0

input (feature)

.	.	.	.
.	.	0	3
.	4	3	4
8	7	6	7
3	0	3	6
4	3	4	7

backward scan

(3,4)-chamfer distance mapping

0	0	0	0
0	0	1	0
0	0	0	0
0	0	0	0
0	1	0	0
0	0	0	0

input (feature)

.	.	.	.
.	.	0	3
.	4	3	4
8	7	4	7
3	0	3	6
4	3	4	7

backward scan

(3,4)-chamfer distance mapping

0	0	0	0
0	0	1	0
0	0	0	0
0	0	0	0
0	1	0	0
0	0	0	0

input (feature)

.	.	.	.
.	.	0	3
.	4	3	4
8	3	4	7
3	0	3	6
4	3	4	7

backward scan

(3,4)-chamfer distance mapping

0	0	0	0
0	0	1	0
0	0	0	0
0	0	0	0
0	1	0	0
0	0	0	0

input (feature)

.	.	.	.
.	.	0	3
.	4	3	4
4	3	4	7
3	0	3	6
4	3	4	7

backward scan

(3,4)-chamfer distance mapping

0	0	0	0
0	0	1	0
0	0	0	0
0	0	0	0
0	1	0	0
0	0	0	0

input (feature)

.	.	.	.
.	.	0	3
.	4	3	4
4	3	4	7
3	0	3	6
4	3	4	7

backward scan

(3,4)-chamfer distance mapping

0	0	0	0
0	0	1	0
0	0	0	0
0	0	0	0
0	1	0	0
0	0	0	0

input (feature)

.	.	.	.
.	.	0	3
.	4	3	4
4	3	4	7
3	0	3	6
4	3	4	7

backward scan

(3,4)-chamfer distance mapping

0	0	0	0
0	0	1	0
0	0	0	0
0	0	0	0
0	1	0	0
0	0	0	0

input (feature)

.	.	.	.
.	.	0	3
.	4	3	4
4	3	4	7
3	0	3	6
4	3	4	7

backward scan

(3,4)-chamfer distance mapping

0	0	0	0
0	0	1	0
0	0	0	0
0	0	0	0
0	1	0	0
0	0	0	0

input (feature)

.	.	.	.
.	.	0	3
7	4	3	4
4	3	4	7
3	0	3	6
4	3	4	7

backward scan

(3,4)-chamfer distance mapping

0	0	0	0
0	0	1	0
0	0	0	0
0	0	0	0
0	1	0	0
0	0	0	0

input (feature)

.	.	.	.
.	.	0	3
7	4	3	4
4	3	4	7
3	0	3	6
4	3	4	7

backward scan

(3,4)-chamfer distance mapping

0	0	0	0
0	0	1	0
0	0	0	0
0	0	0	0
0	1	0	0
0	0	0	0

input (feature)

.	.	.	.
.	.	0	3
7	4	3	4
4	3	4	7
3	0	3	6
4	3	4	7

backward scan

(3,4)-chamfer distance mapping

0	0	0	0
0	0	1	0
0	0	0	0
0	0	0	0
0	1	0	0
0	0	0	0

input (feature)

.	.	.	.
.	3	0	3
7	4	3	4
4	3	4	7
3	0	3	6
4	3	4	7

backward scan

(3,4)-chamfer distance mapping

0	0	0	0
0	0	1	0
0	0	0	0
0	0	0	0
0	1	0	0
0	0	0	0

input (feature)

.	.	.	.
6	3	0	3
7	4	3	4
4	3	4	7
3	0	3	6
4	3	4	7

backward scan

(3,4)-chamfer distance mapping

0	0	0	0
0	0	1	0
0	0	0	0
0	0	0	0
0	1	0	0
0	0	0	0

input (feature)

.	.	.	4
6	3	0	3
7	4	3	4
4	3	4	7
3	0	3	6
4	3	4	7

backward scan

(3,4)-chamfer distance mapping

0	0	0	0
0	0	1	0
0	0	0	0
0	0	0	0
0	1	0	0
0	0	0	0

input (feature)

.	.	3	4
6	3	0	3
7	4	3	4
4	3	4	7
3	0	3	6
4	3	4	7

backward scan

(3,4)-chamfer distance mapping

0	0	0	0
0	0	1	0
0	0	0	0
0	0	0	0
0	1	0	0
0	0	0	0

input (feature)

.	4	3	4
6	3	0	3
7	4	3	4
4	3	4	7
3	0	3	6
4	3	4	7

backward scan

(3,4)-chamfer distance mapping

0	0	0	0
0	0	1	0
0	0	0	0
0	0	0	0
0	1	0	0
0	0	0	0

input (feature)

7	4	3	4
6	3	0	3
7	4	3	4
4	3	4	7
3	0	3	6
4	3	4	7

backward scan

(3,4)-chamfer distance mapping

0	0	0	0
0	0	1	0
0	0	0	0
0	0	0	0
0	1	0	0
0	0	0	0

input (feature)

7	4	3	4
6	3	0	3
7	4	3	4
4	3	4	7
3	0	3	6
4	3	4	7

backward scan (completed)

(3,4)-chamfer distance mapping

.	.	.	.
.	.	0	3
.	4	3	4
8	7	6	7
11	0	3	6
4	3	4	7

forward scan (completed)

7	4	3	4
6	3	0	3
7	4	3	4
4	3	4	7
3	0	3	6
4	3	4	7

backward scan (influence zone 1)

(3,4)-chamfer distance mapping

.	.	.	.
.	.	0	3
.	4	3	4
8	7	6	7
11	0	3	6
4	3	4	7

forward scan (completed)

7	4	3	4
6	3	0	3
7	4	3	4
4	3	4	7
3	0	3	6
4	3	4	7

backward scan (influence zone 2)

(3,4)-chamfer distance mapping

0	0	0	0
0	0	1	0
0	0	0	0
0	0	0	0
0	1	0	0
0	0	0	0

input (feature)

7	4	3	4
6	3	0	3
7	4	3	4
4	3	4	7
3	0	3	6
4	3	4	7

distance map

Distance-based skeletonization

1. Border points (as feature elements) are extracted from the original binary image.
2. Distance transform is executed (i.e., distance map is generated).
3. The ridges (local extremas) are detected as skeletal points.

Distance-based skeletonization – step 1

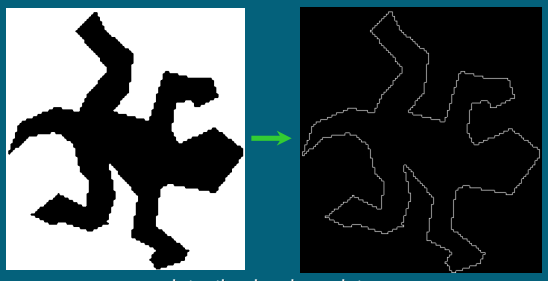

detecting border points

Distance-based skeletonization – step 2

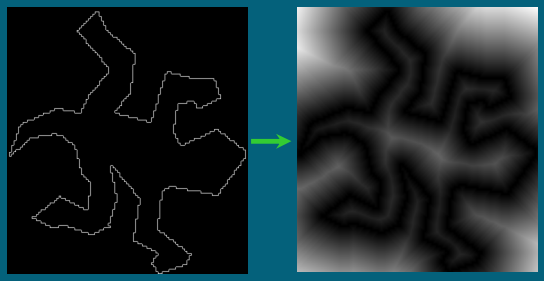

distance mapping

Distance-based skeletonization – step 3

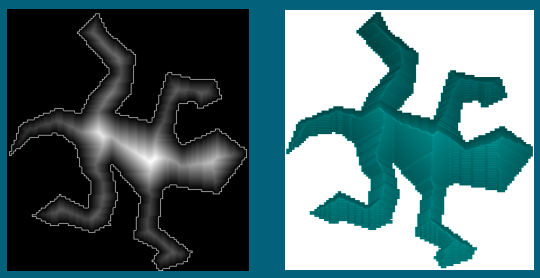

detecting ridges (local extremas)

Distance-based skeletonization – step 3

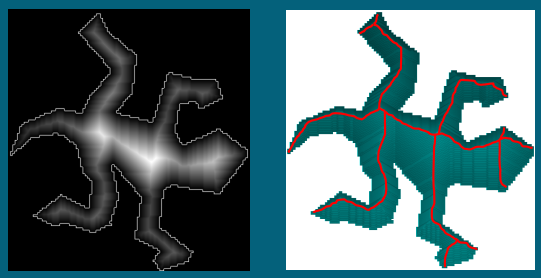

detecting ridges (local extremas)

Skeletonization techniques

- **distance transform**
- **Voronoi diagram**
- **thinning**

Voronoi diagram

Input:
Set of points (generating poins)

Output:
the partition of the space into cells so that each cell contains exactly one generating point and the locus of all points which are closer to this generating point than to others.



Voronoi diagram



$$d(r,p) \le d(r,q_i)$$
$$(i = 1,2,...)$$

Voronoi diagram in 3D

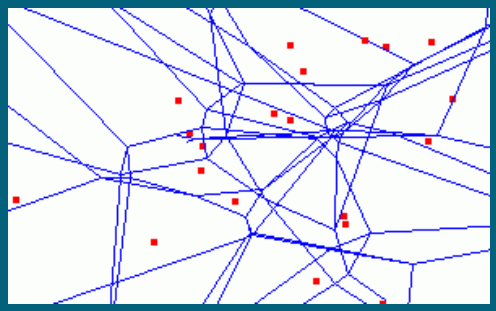

Voronoi diagram of 20 generating points

Voronoi diagram in 3D



a cell (convex polyhedron) of that Voronoi diagram

Incremental construction

$O(n)$

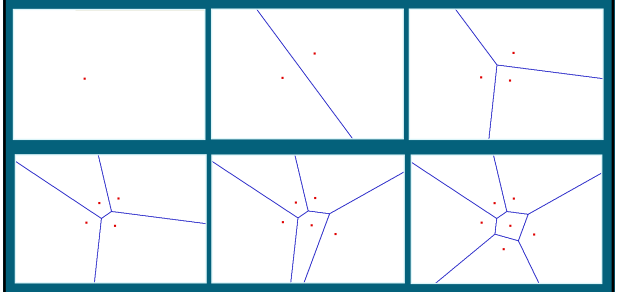

Divide and conquer

$O(n \cdot \log n)$

left diagram

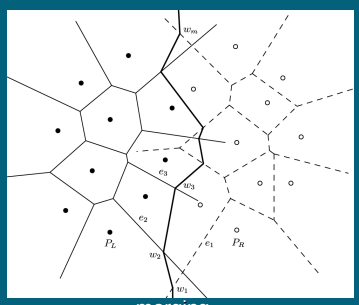

right diagram

merging

Voronoi diagram - skeleton

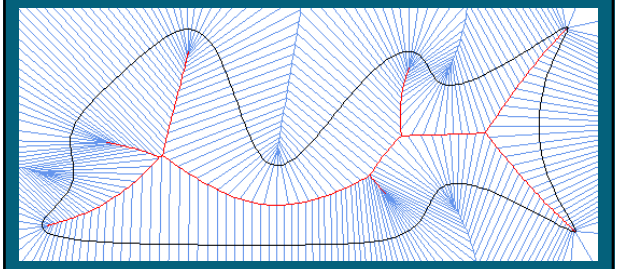

set of generating points = sampled boundary

Voronoi diagram - skeleton

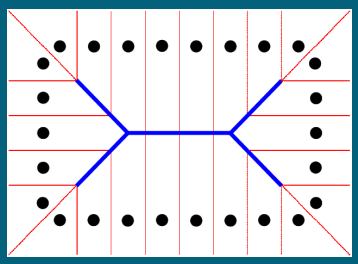

If the density of boundary points goes to infinity, then the corresponding Voronoi diagram converges to the skeleton.

Voronoi skeleton

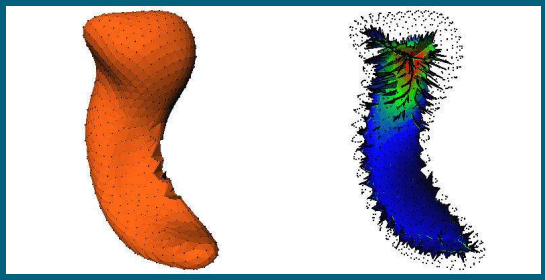

original 3D object Voronoi skeleton

M. Styner (UNC, Chapel Hill)

Skeletonization techniques

- **distance transform**
- **Voronoi diagram**
- **thinning**

„Thinning”

Thinning algorithms

repeat

remove „*deletable*” points from the actual binary image

} one iteration step

until no points are deleted

degrees of freedom:

- which points are regarded as „*deletable*” ?
- how to organize one iteration step?

Example of 2D thinning

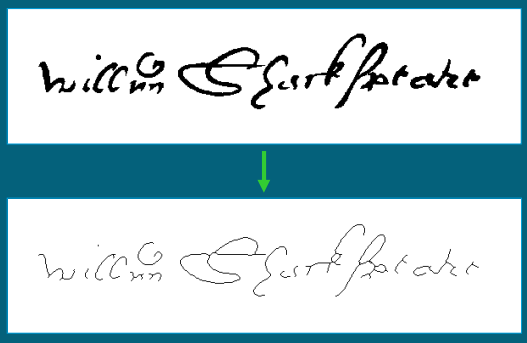

Example of 3D thinning

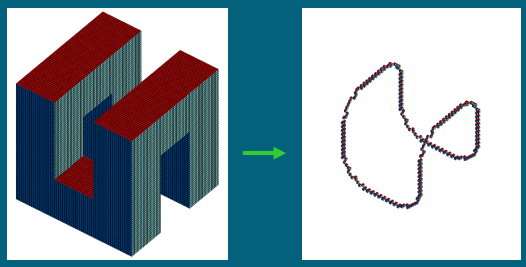

original object centerline

I prefer thinning since it …

- allows direct centerline extraction in 3D
- makes easy implementation possible
- takes the least computational costs
- can be executed in parallel.

Some concepts …

main *directions*:

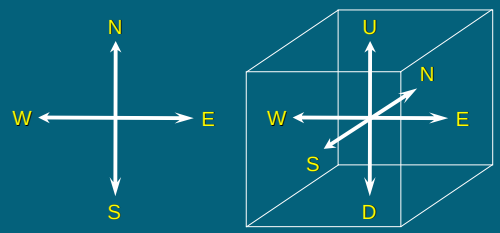

Some concepts …

p is a **line-end point**
if it is adjacent to just one object point

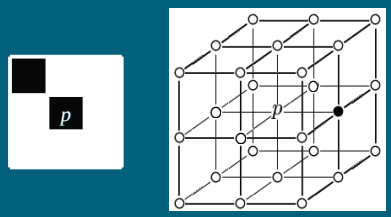

Some concepts …

p is a **border point** if it is (4/6-)adjacent
to at least one non-object point

don't care (either 0 or 1)



border point of type N border point of type U

Some concepts …

An object-point is **simple** if its deletion doesn't alter the topology of the picture.

Examples of **non-simple** points in 2D pictures:

deleting an object splitting an object creating a cavity

Some concepts …

Examples of **non-simple** points in 3D pictures:

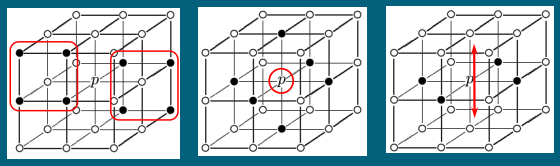

splitting an object creating a cavity creating a hole

Some concepts …

*Simple*ness is a local property:
It depends on the 3x3 / 3x3x3 neighborhood of the point in question.

It can be decided by using a precalculated LUT (look-up table) of size 128 bit / 8 Mbyte.

A 4-subiteration parallel 2D thinning algorithm

(*Rosenfeld, 1975*)

repeat
  for each directions N,E,S, and W **do**
    delete object point if it is
      - a *border* point
        according to the actual direction,
      - *not* a *line-end* point, and
      - *simple*
until no points are deleted

A 4-subiteration parallel 2D thinning algorithm

(*Rosenfeld, 1975*)

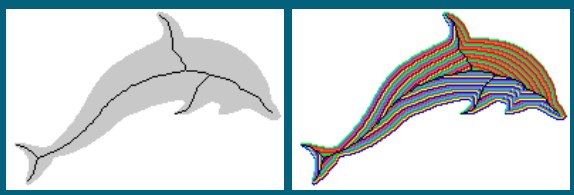

A sequential 3D thinning algorithm

(*Palágyi et al., 2001*)

repeat
  for each direction U,N,E,S,W, and D **do**
    - mark object point *p* if it is
      - *border* according to the actual direction,
      - *not line-end* points, and
      - *simple*
    - **for** each marked point *q* **do**
      delete *q* if it is
        - not a *line-end* point, and
        - *simple* in the actual picture
until no points are deleted

A sequential 3D thinning algorithm

(*Palágyi et al., 2001*)



Requirements

- **Geometrical**:
  The skeleton must be in the middle of the original object and must be invariant to translation, rotation, and scale change.
- **Topological**:
  The skeleton must retain the topology of the original object.

Comparison

method	geometrical	topological
distance-based	yes	no
Voronoi-based	yes	yes
thinning	no	yes

Syllabus

- Shape
- Shape features
- Skeleton
- Skeletonization
- Applications

Applications in 2D

- „exotic” character recognition
- recognition of handwritten text
- signature verification
- fingerprint and palmprint recognition
- raster-to-vector-conversion
- …

Exotic character recognition

characters of a Japanese signature

K. Ueda

Signature verification

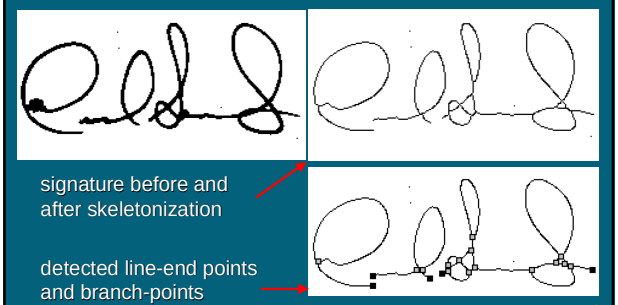

signature before and after skeletonization

detected line-end points and branch-points

L.C. Bastos et al.

Fingerprint verification

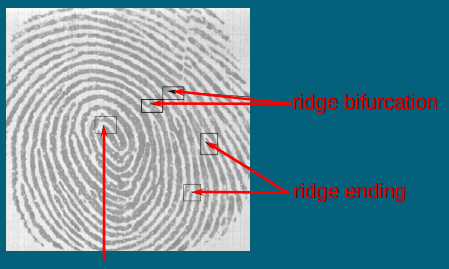

features in fingerprints

A. Ross

Fingerprint verification

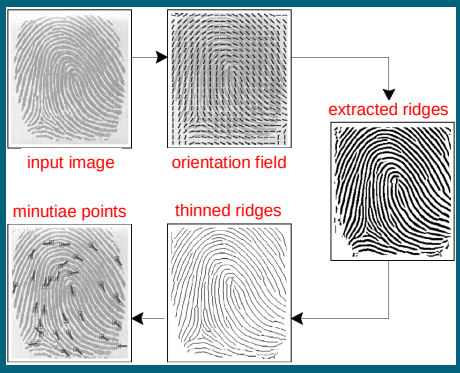

the process

A. Ross

Palmprint verification

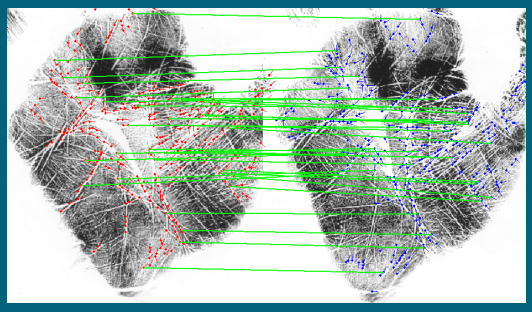

matching extracted features

N. Duta

Raster-to-vector conversion

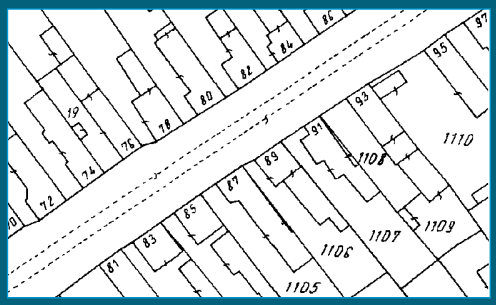

scanned map

E. Katona

Raster-to-vector conversion

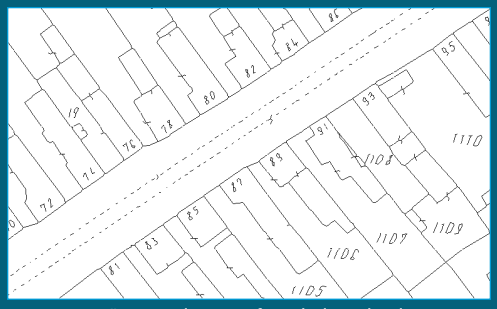

„raw” vector image after skeletonization

E. Katona

Raster-to-vector conversion

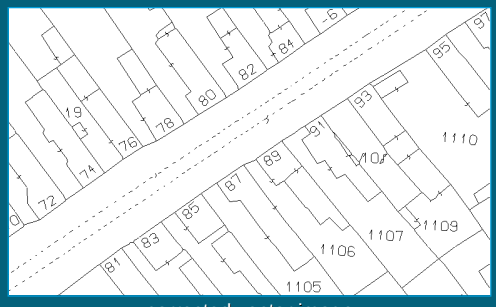

corrected vector image

E. Katona

Shape matching and retrieval

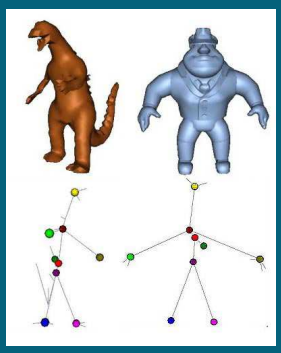

skeletal graph construction

graph matching

Sundar et al., 2003

Shape deformation

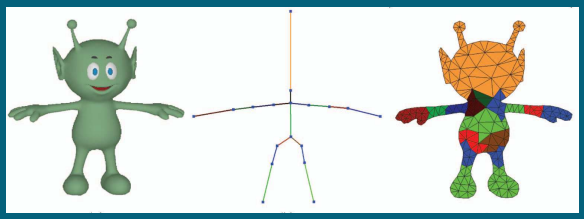

object | partitioned skeleton | skeleton control domain

Yan et al., 2008

Shape deformation

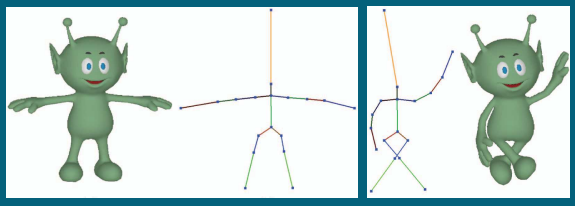

deformed skeleton and object

Yan et al., 2008

Shape deformation

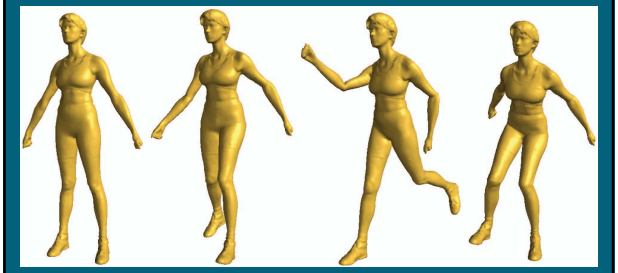

deformed models

Yan et al., 2008

Shape deformation

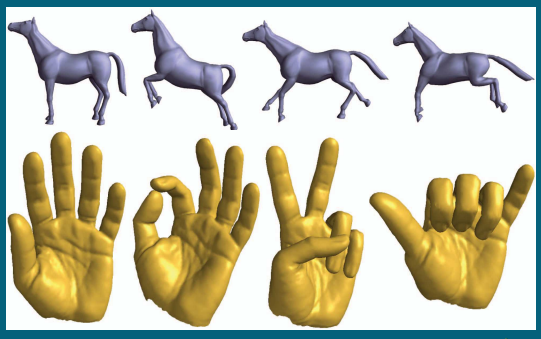

deformed models

Yan et al., 2008

Medical applications in 3D

There are some frequently used 3D medical scanners (e.g., CT, MR, SPECT, PET), hence, applications in medical image processing are mentioned.

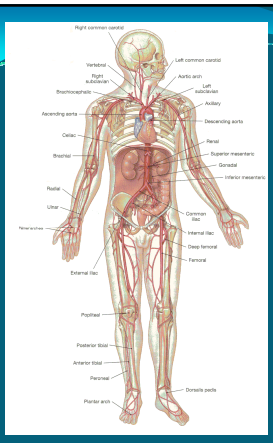

There are a lots of tubular structures (e.g., blood vessels, airways) in the human body, therefore, centerline extraction is fairly important.

Applications based on centerline extraction

E. Sorantin et al.

Airway (trachealstenosis)

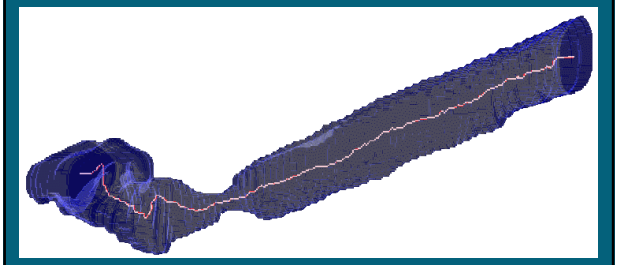

E. Sorantin et al.

Airway (trachealstenosis)

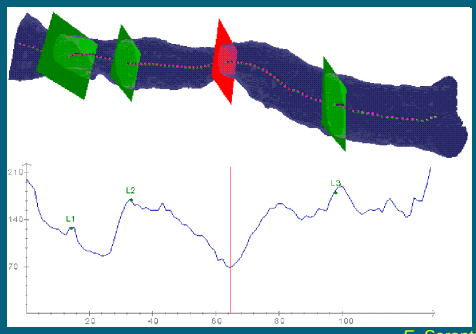

E. Sorantin et al.

Virtual colonoscopy

A. Villanova et al.

Quantitative analysis of intrathoracic airway trees

Kálmán Palágyi
Juerg Tschirren
Milan Sonka
Eric A. Hoffman

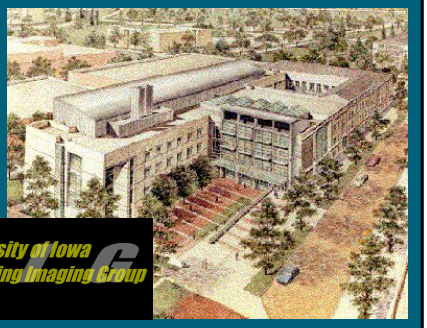

Images



Multi-detector
Row Spiral CT

512 x 512 voxels

500 – 600 slices

0.65 x 0.65 x 0.6 mm^3
(almost isotropic)

Lung segmentation

Centerlines

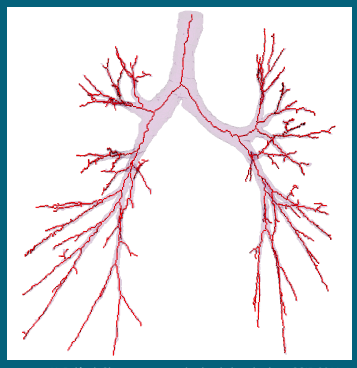

detected
branch-
points

Branch partitioning





centerline labeling

label propagation

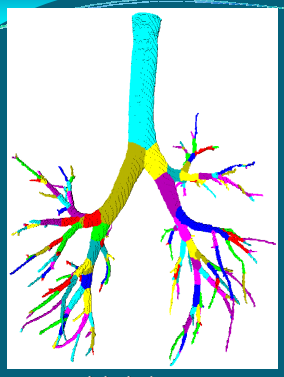

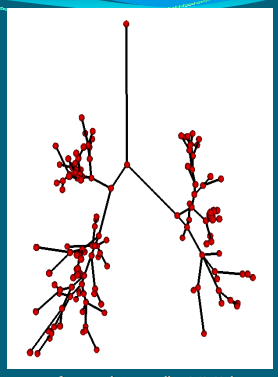

labeled tree formal tree (in XML)

Quantitative indices for tree branches

- length (Euclidean distance between the parent and the child branch points)
- volume (volume of all voxels belonging to the branch)
- surface area (surface area of all boundary voxels belonging to the branch)
- average diameter (assuming cylindric segments)

The entire process

segmented tree





pruned centerlines

labeled tree



formal tree

Matching

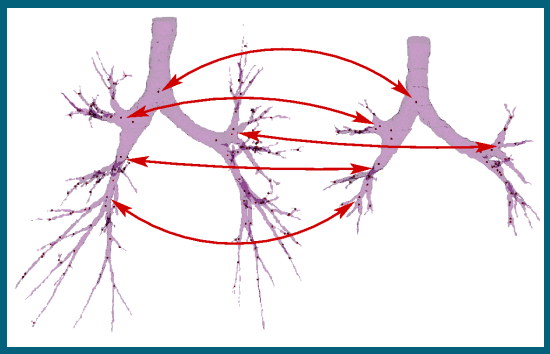



FRC TLC

Anatomical labeling