

Skeletonization and its applications

Kálmán Palágyi



Dept. Image Processing & Computer Graphics
University of Szeged, Hungary

Syllabus

- Shape
- Shape features
- Skeleton
- Skeletonization
- Applications

Syllabus

- Shape
- Shape features
- Skeleton
- Skeletonization
- Applications



Different shapes





**Different
shapes**




Shape

It is a fundamental concept in computer vision.

It can be regarded as the basis for high-level image processing stages concentrating on scene analysis and interpretation.

Shape


It is formed by any connected set of points.

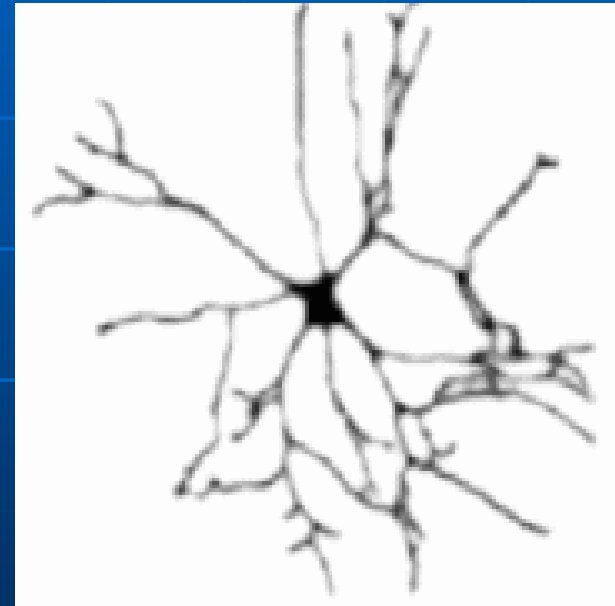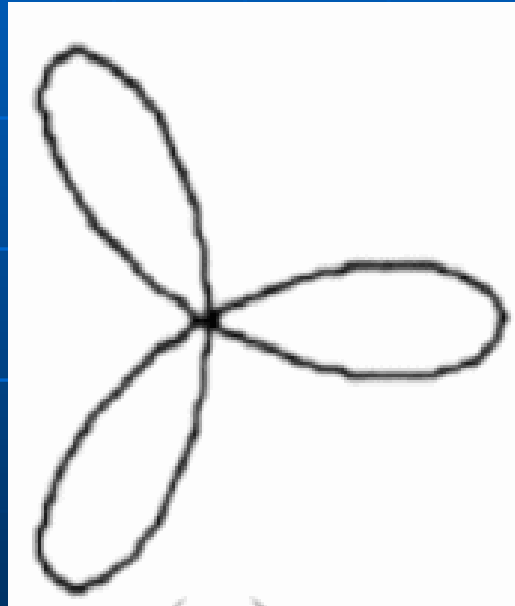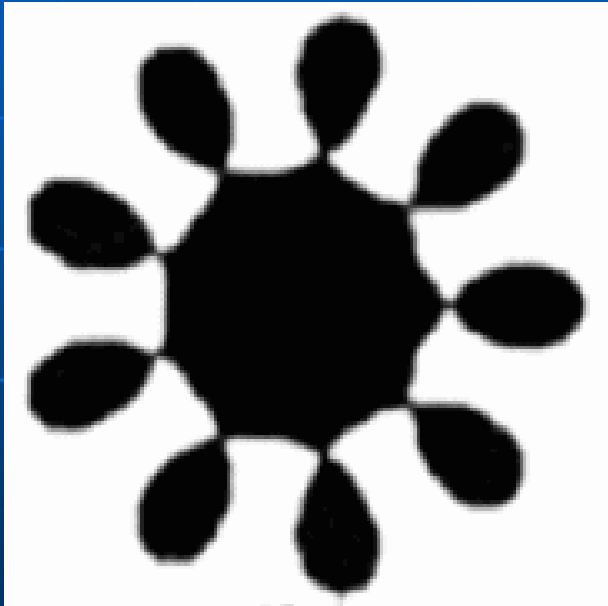

examples of planar shapes


(L.F. Costa, R. Marcondes, 2001)

The generic model of a modular machine vision system

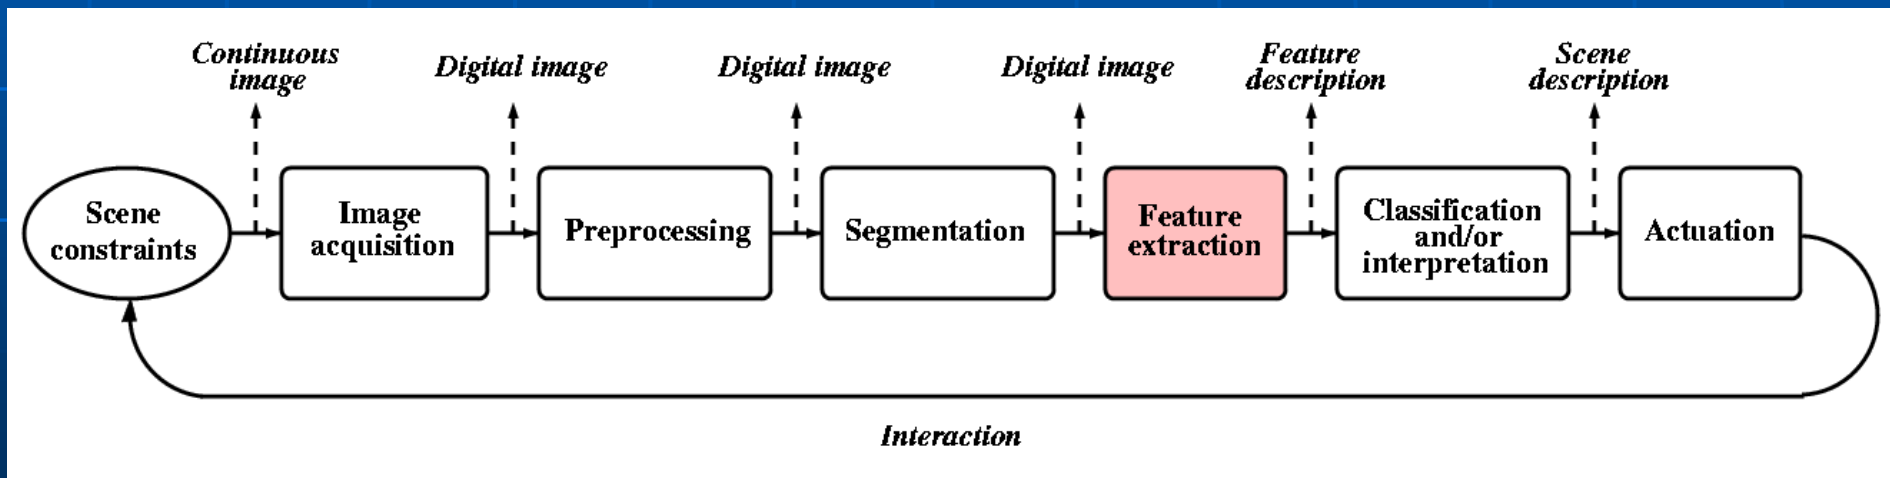

(G.W. Awcock, R. Thomas, 1996)

Feature extraction – shape representation

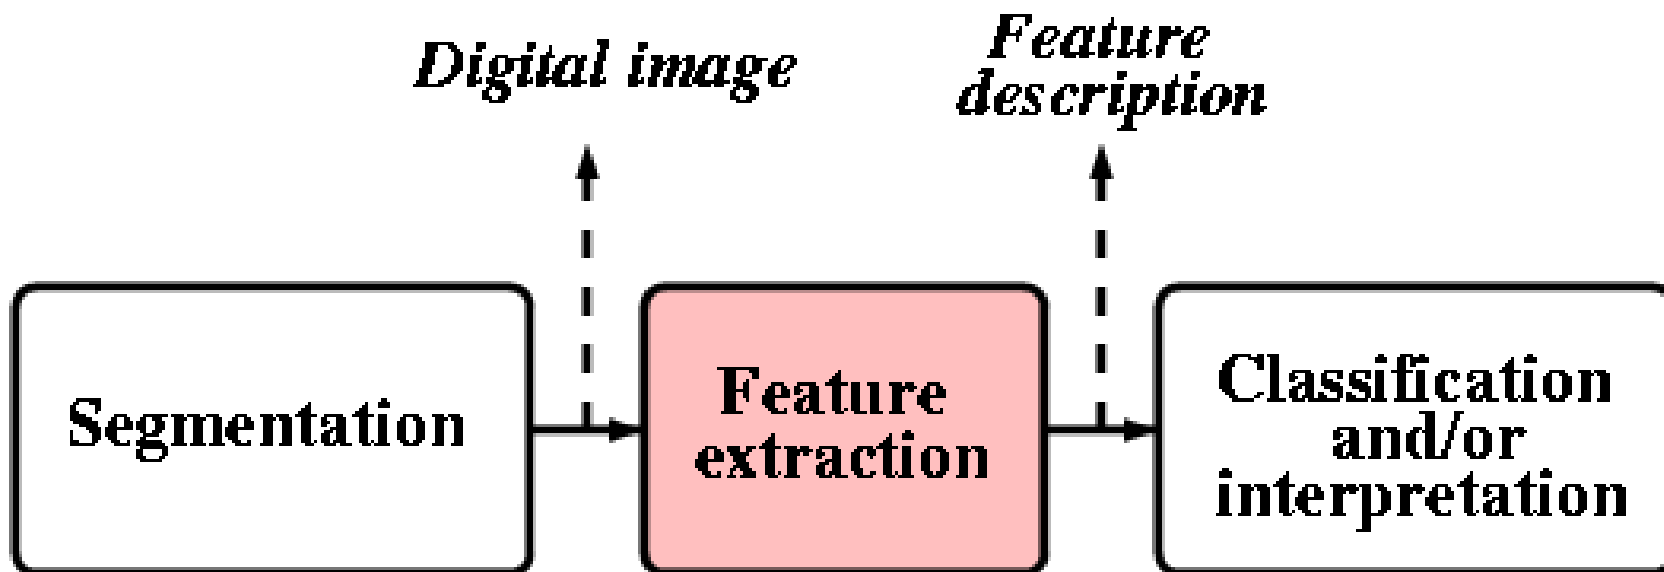

(G.W. Awcock, R. Thomas, 1996)

Syllabus

- Shape
- **Shape features**
- Skeleton
- Skeletonization
- Applications

Shape representation

- to apply a transform in order to represent an object in terms of the transform coefficients,
- to describe the boundary that surrounds an object,
- to describe the region that is occupied by an object.

Transform-based shape representation

- Fourier description
- spherical harmonics – based description (3D)
- wavelet-based analysis
- scale-space / multiscale characterization
- ...

Contour-based shape representation

- chain-code
- run-length
- polygonal approximation
- syntactic primitives
- spline
- snake / active contour
- multiscale primitives
- ...

Region-based shape representation

- polygon
- Voronoi / Delaunay
- quadtree
- morphological decomposition
- convex hull / deficiency
- run-length
- distance transform
- skeleton
- ...

Region-based shape representation

- polygon
- Voronoi / Delaunay
- quadtree
- morphological decomposition
- convex hull / deficiency
- run-length
- distance transform
- **skeleton**
- ...


Syllabus

- Shape
- Shape features
- **Skeleton**
- Skeletonization
- Applications


Skeleton

- *result of the Medial Axis Transform:* object points having at least two closest boundary points;
- *prairie-fire analogy:* the boundary is set on fire and skeleton is formed by the loci where the fire fronts meet and quench each other;
- the locus of the centers of all the maximal inscribed hyper-spheres.

Nearest boundary points and inscribed hyper-spheres

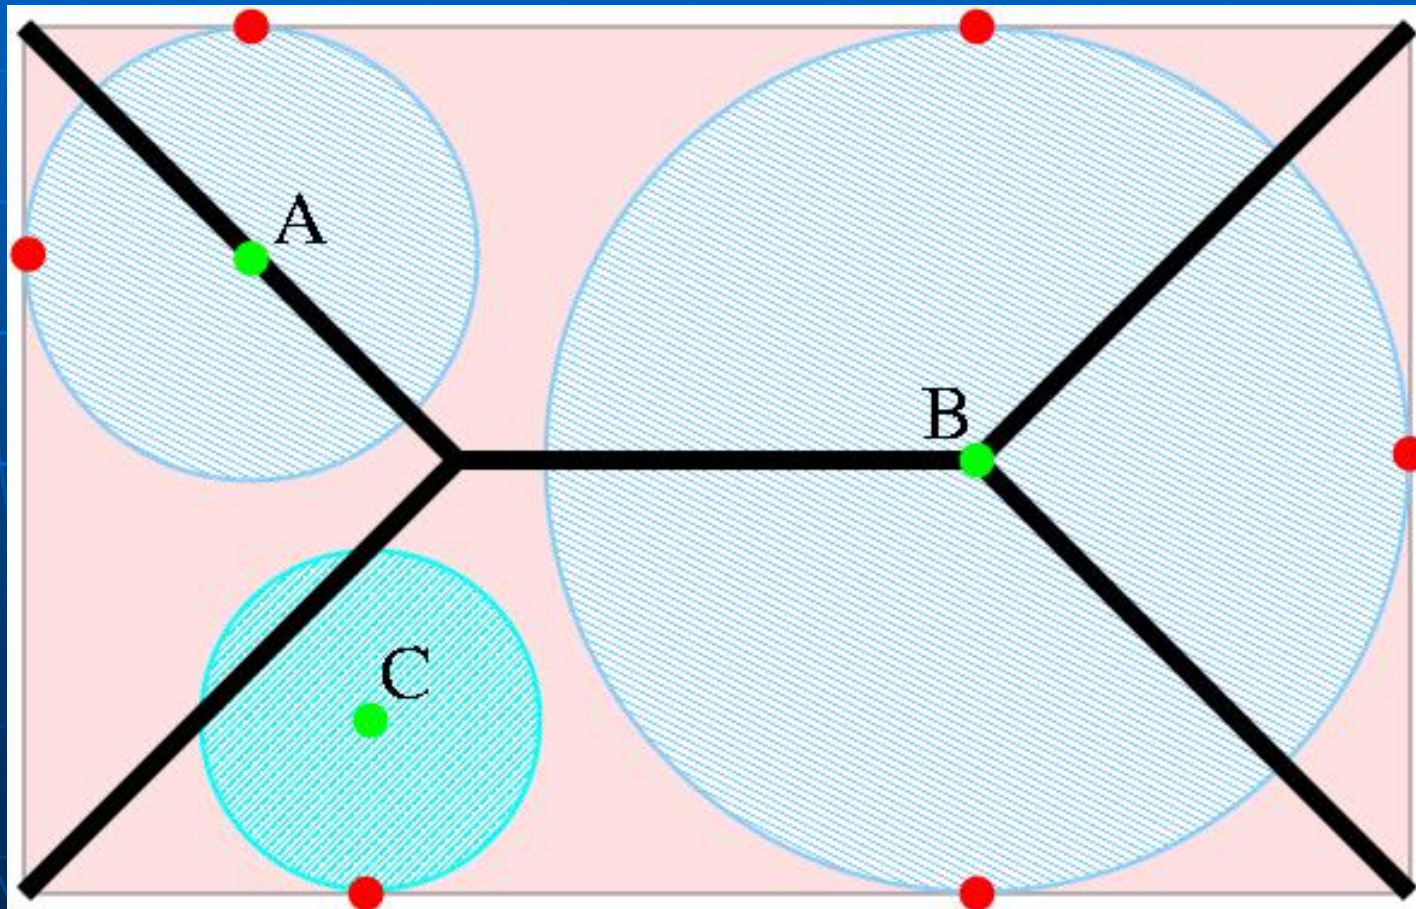

Object = union of the inscribed hyper-spheres


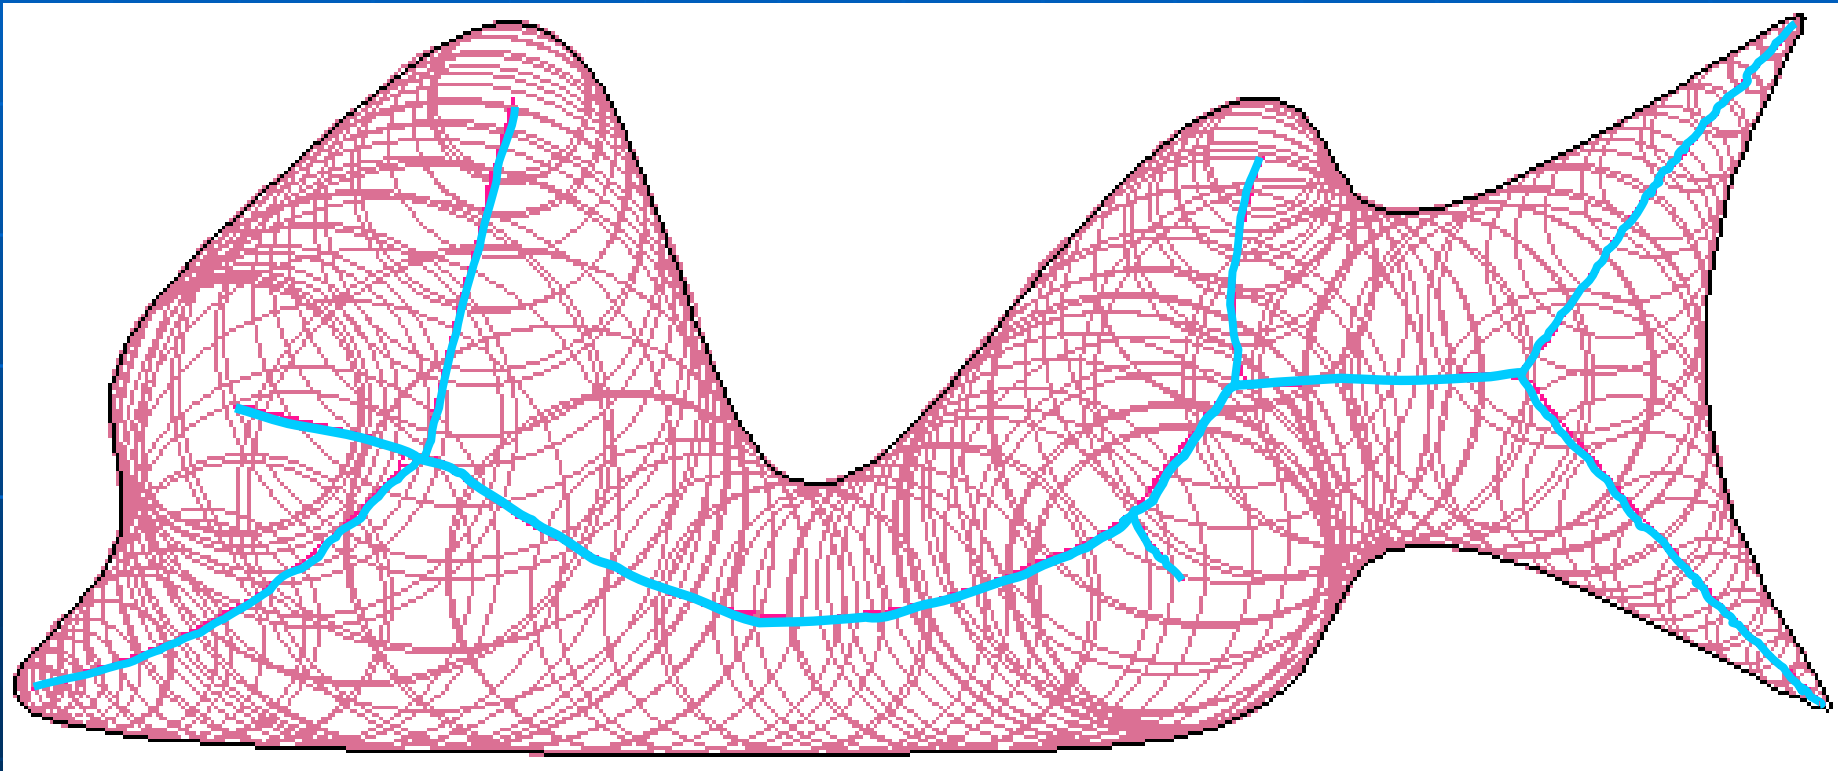


object boundary

maximal inscribed disks


centers

Skeleton in 3D

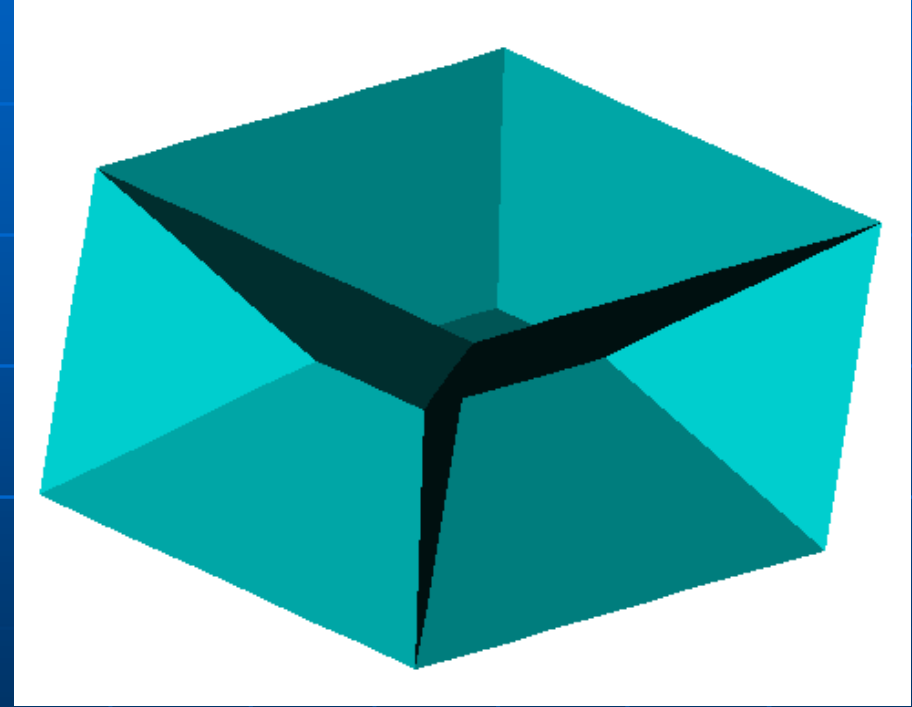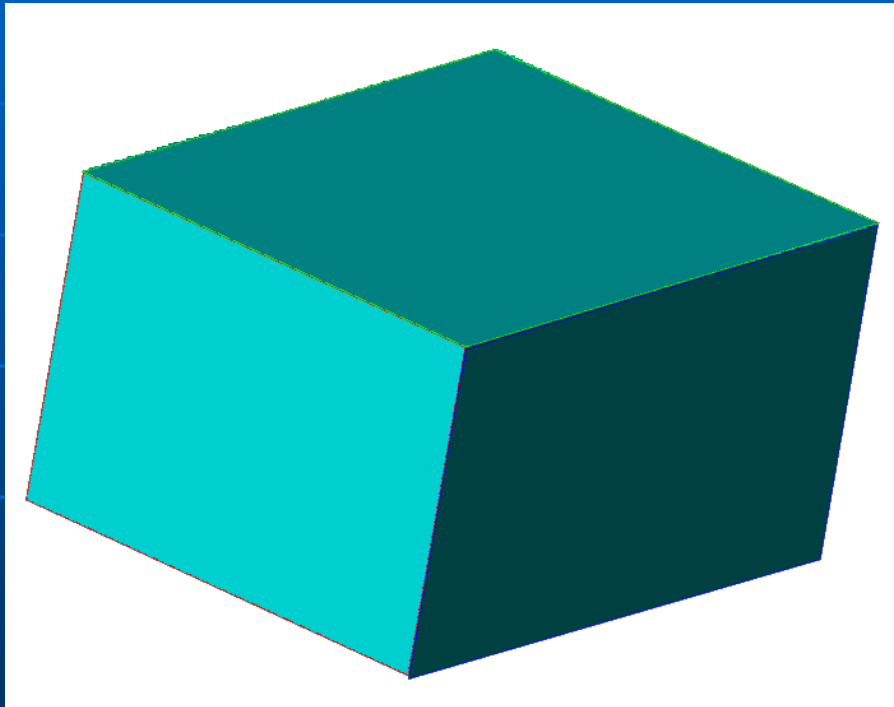


The skeleton in 3D generally contains surface patches (2D segments).

Skeleton \rightarrow Original object

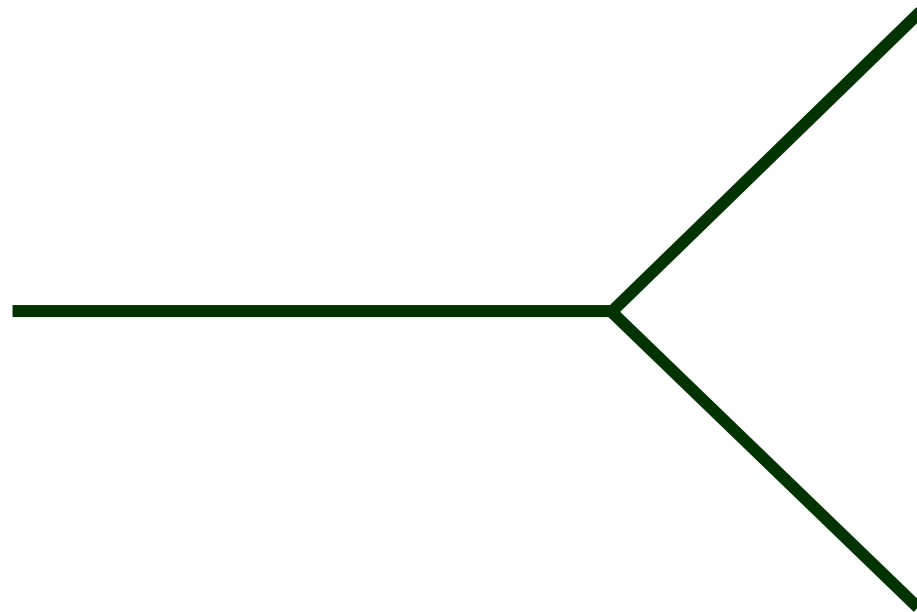


Skeleton → Original object

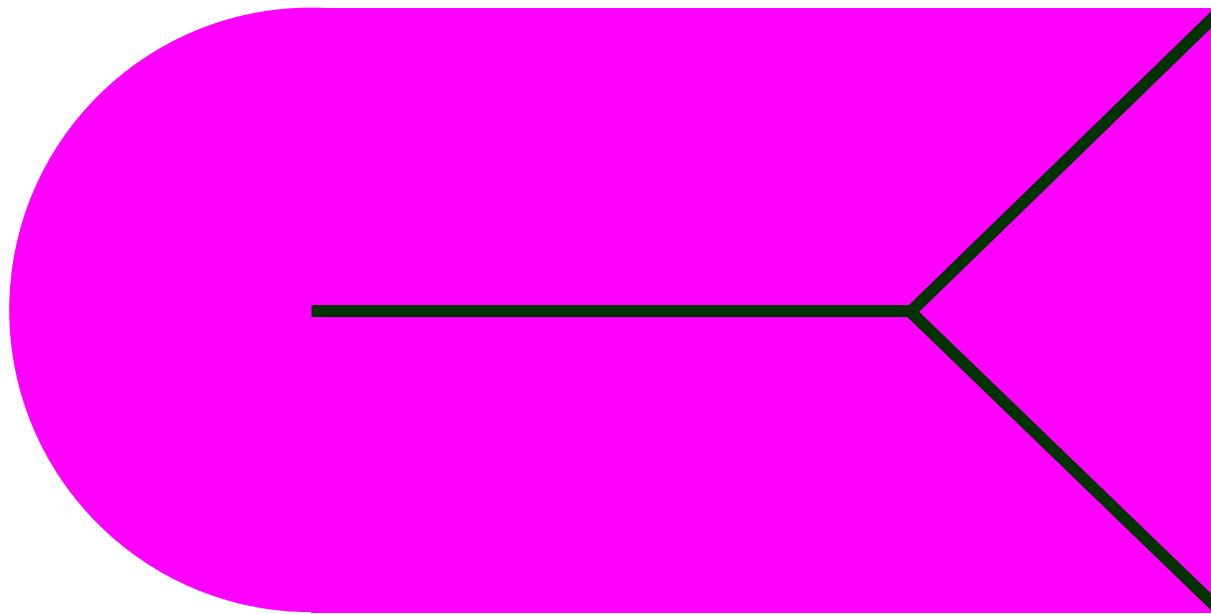


Skeleton → Original object




Skeleton \rightarrow Original object

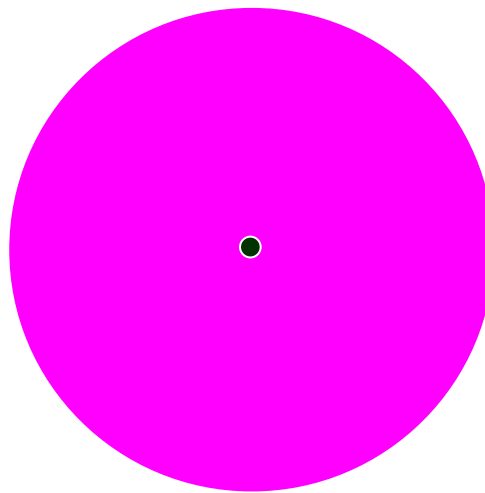

Skeleton \rightarrow Original object




Skeleton \rightarrow Original object

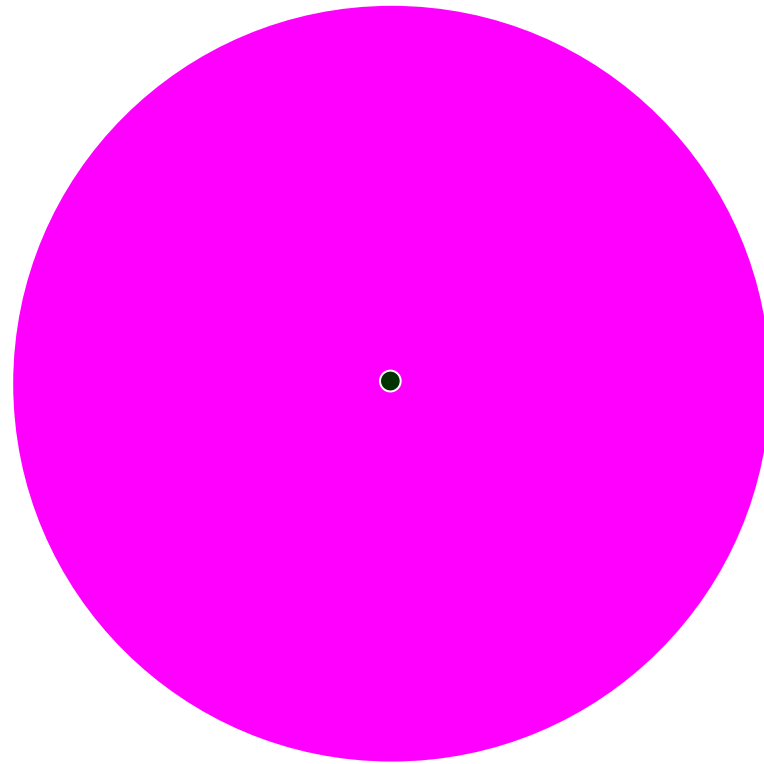


Skeleton → Original object




Skeleton → Original object

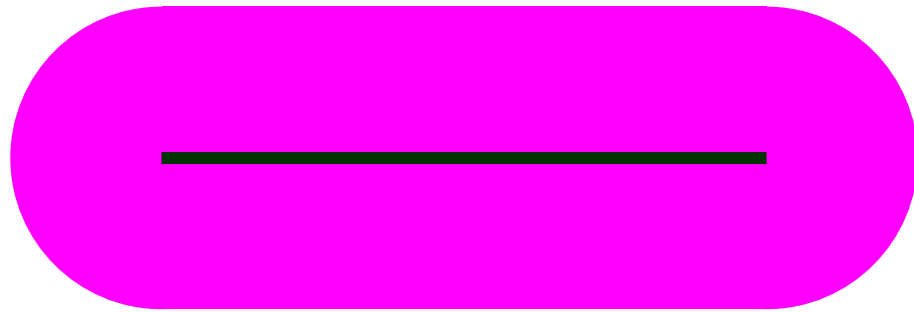



Skeleton → Original object

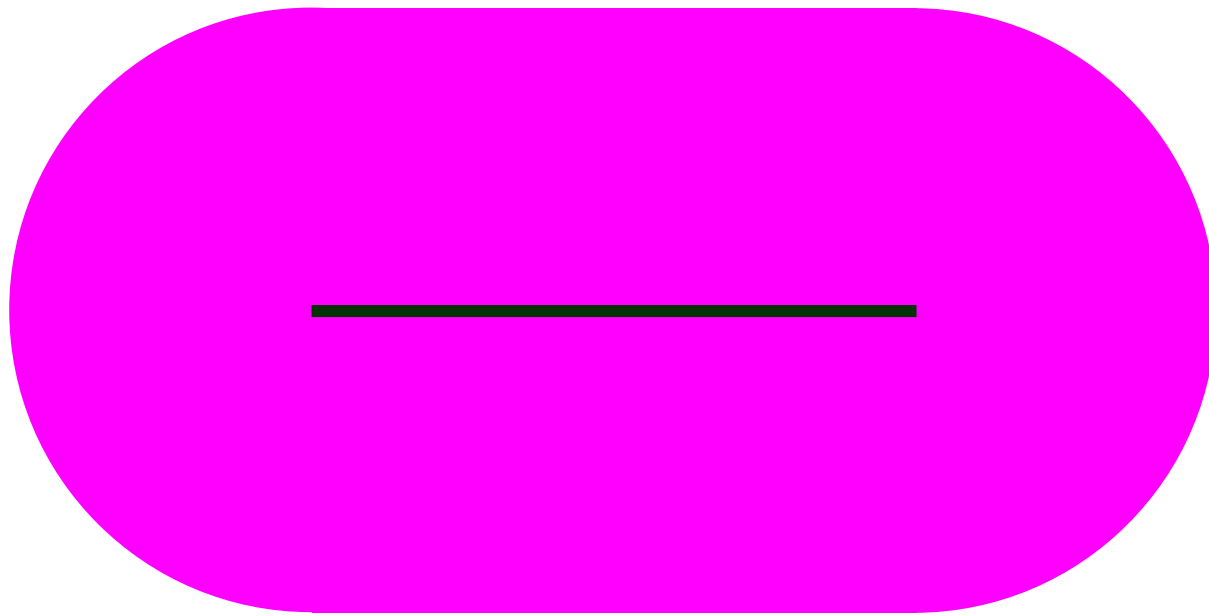

Skeleton \rightarrow Original object

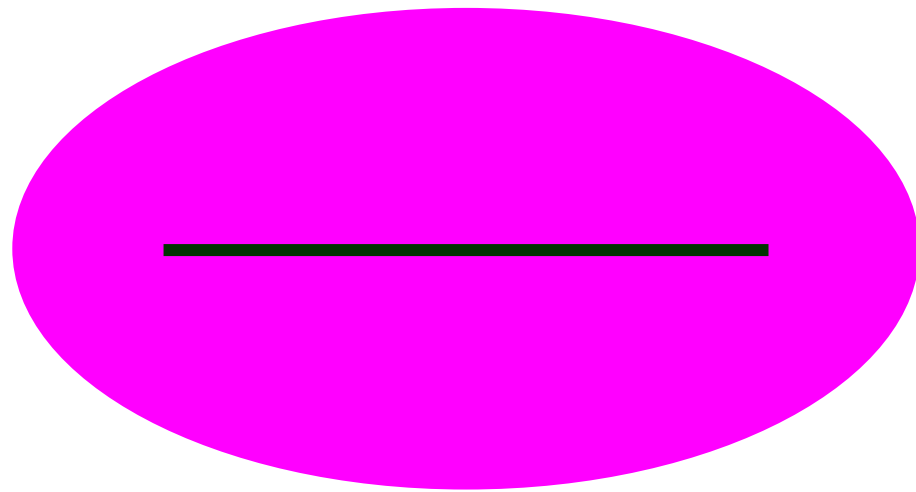


Uniqueness

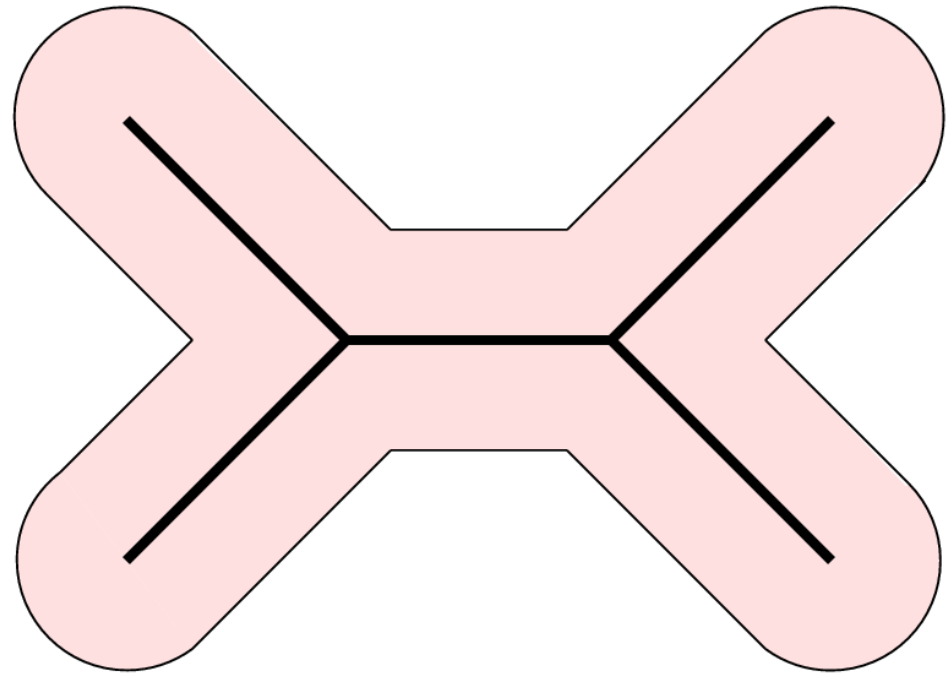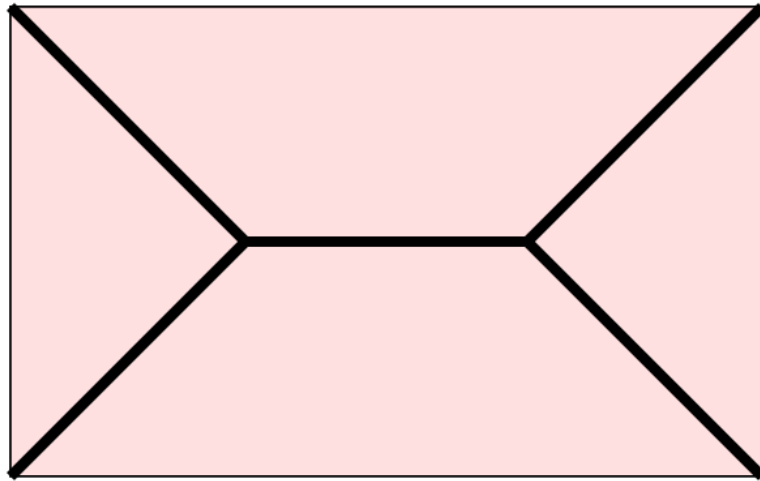

The same skeleton may belong to different elongated objects.


Inner and outer skeleton

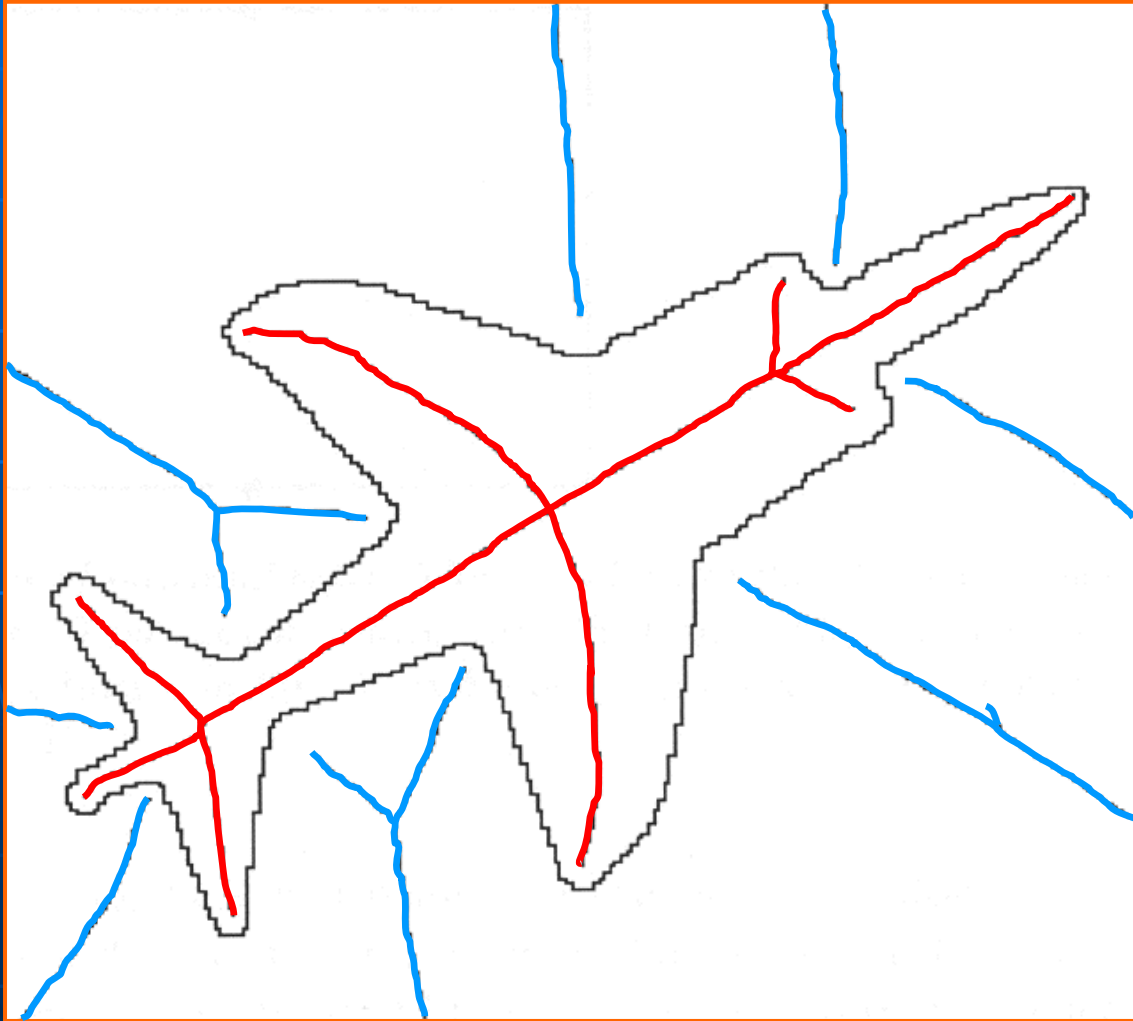


(inner) skeleton

outer skeleton
(skeleton of the
negative image)

Stability

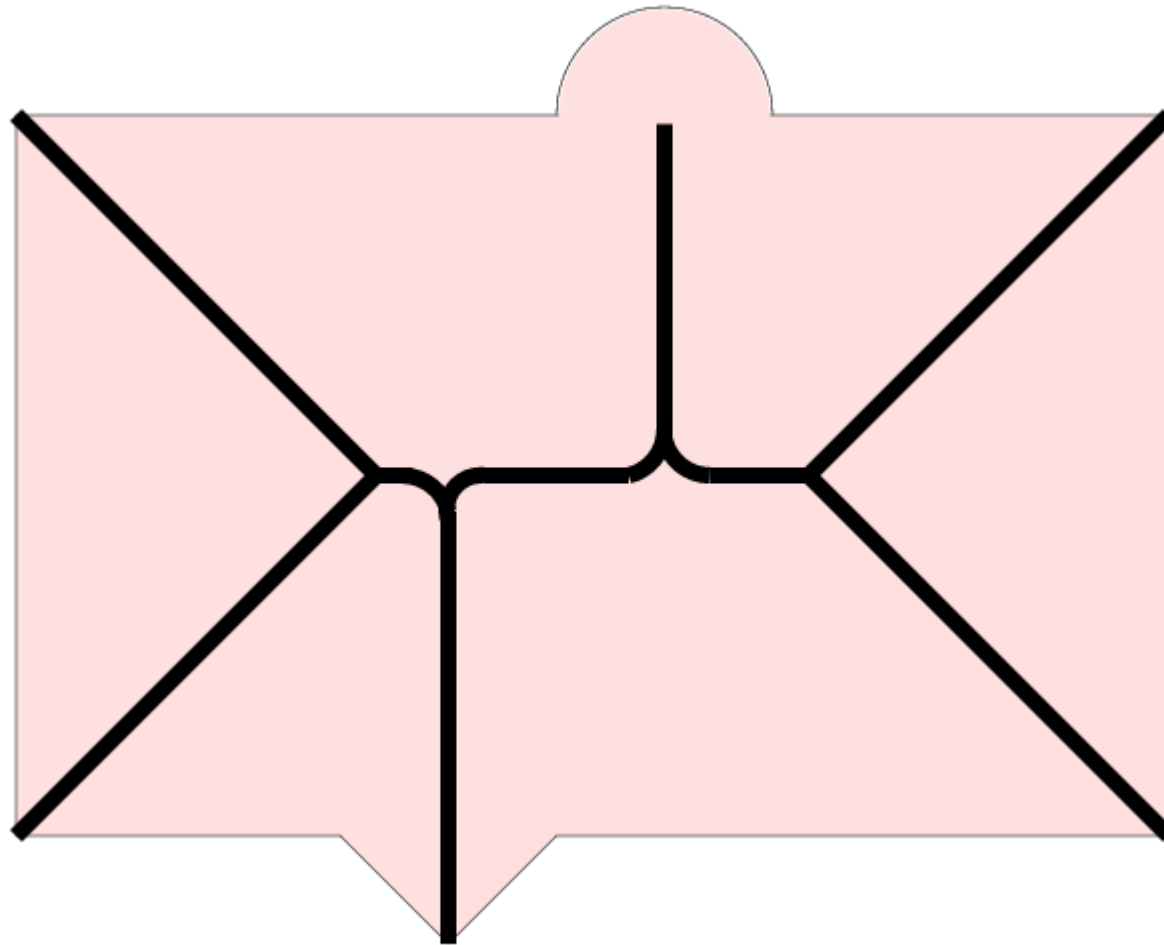

Representing the topological structure

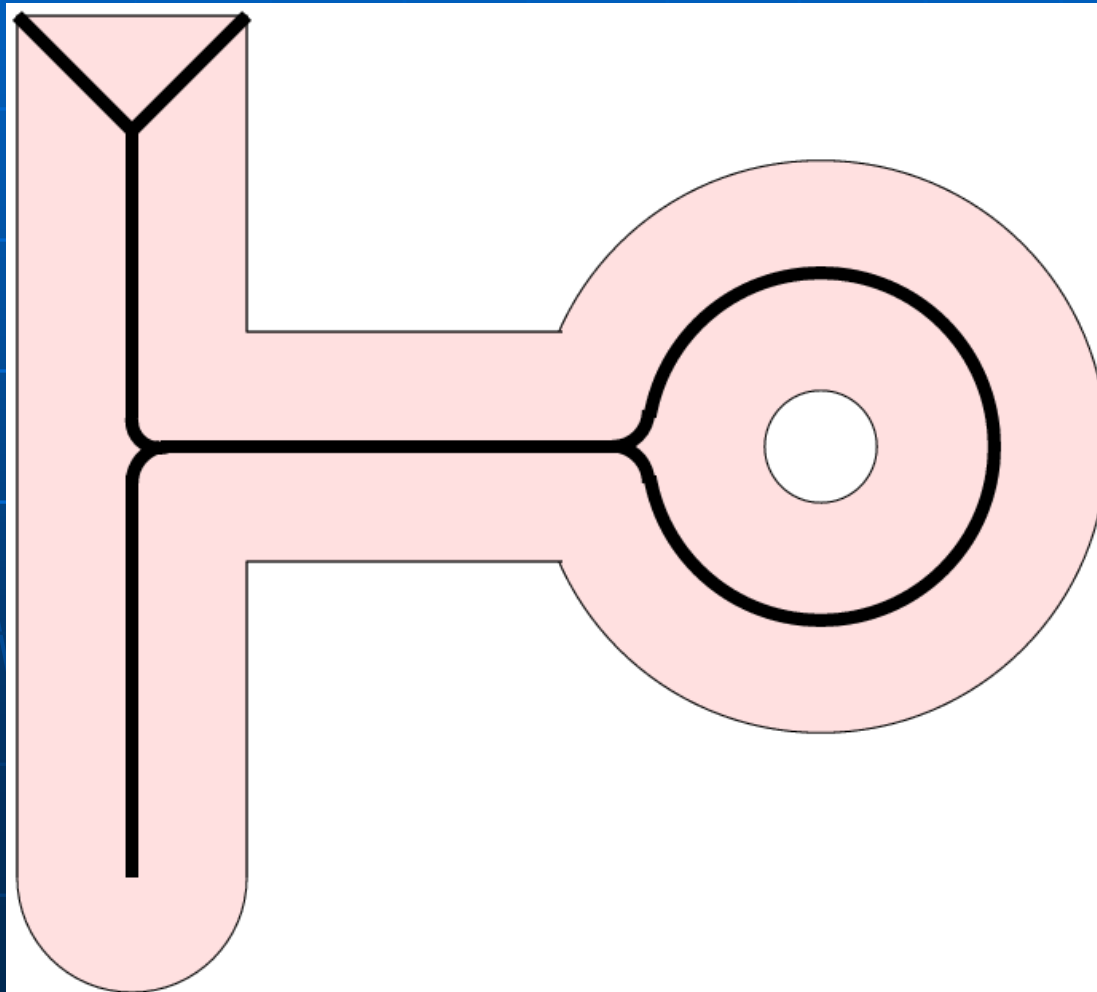

Properties

- represents
 - the general form of an object,
 - the topological structure of an object, and
 - local object symmetries.
- invariant to
 - translation,
 - rotation, and
 - (uniform) scale change.
- simplified and thin.



Syllabus

- Shape
- Shape features
- Skeleton
- **Skeletonization**
- Applications

Skeletonization ...




Skeletonization ...

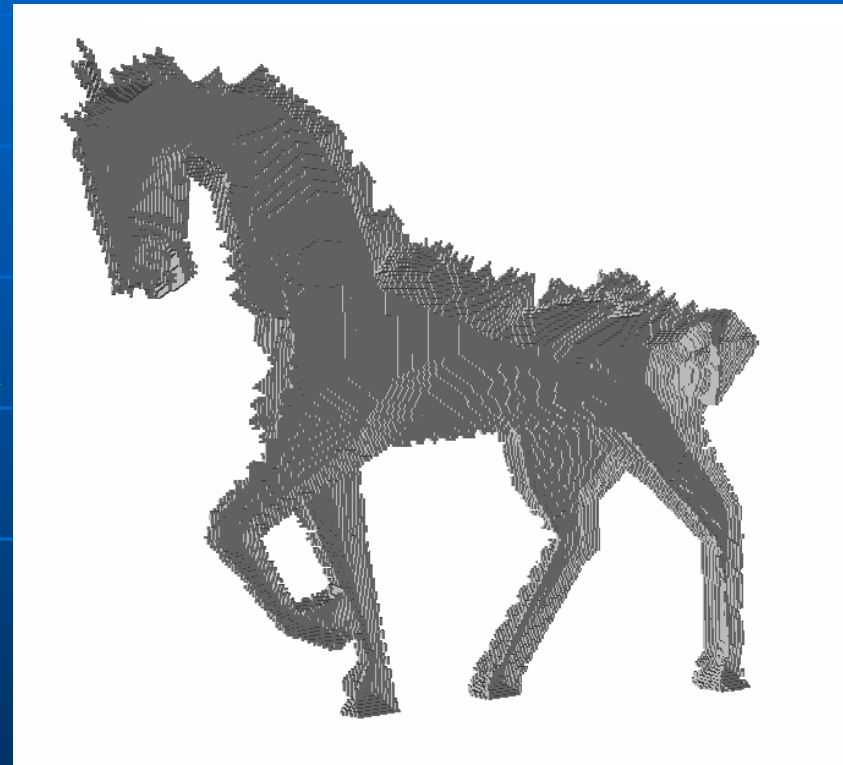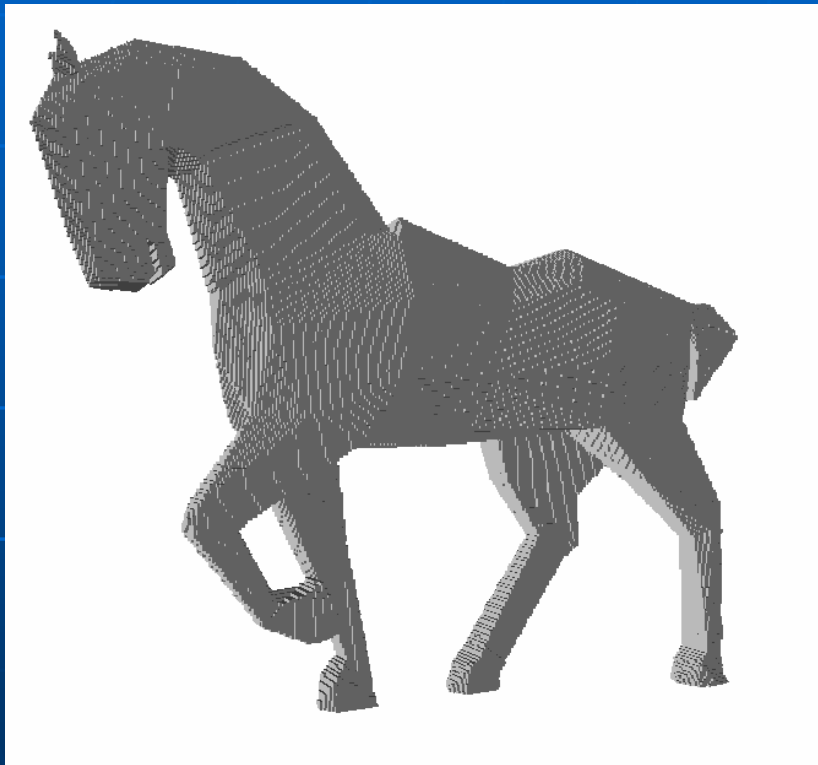


... means skeleton extraction from elongated binary objects.

Skeleton-like descriptors in 3D


original

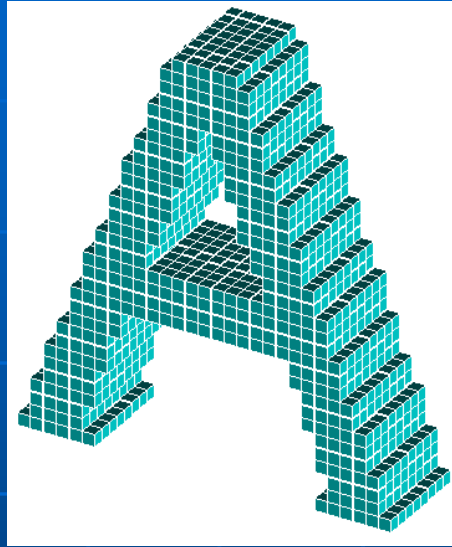


medial
surface


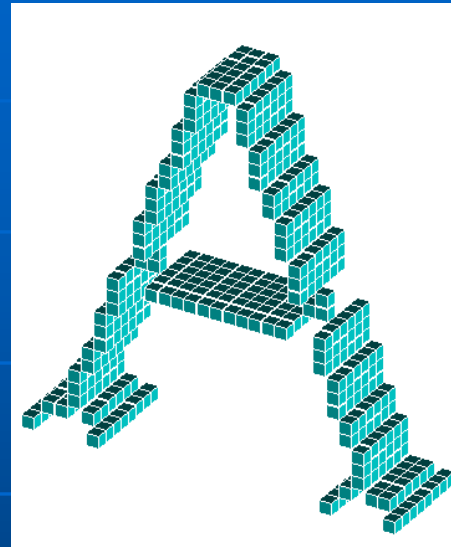


medial
lines


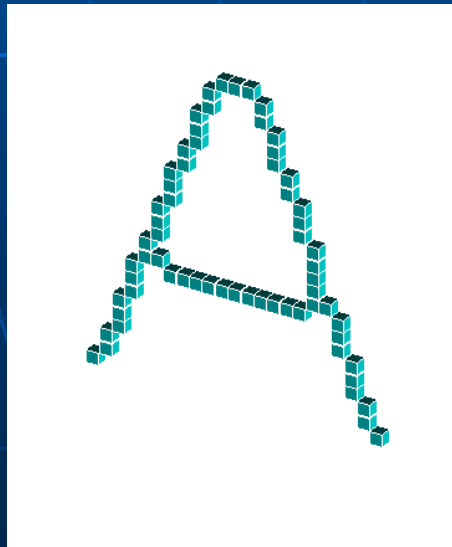


topological
kernel

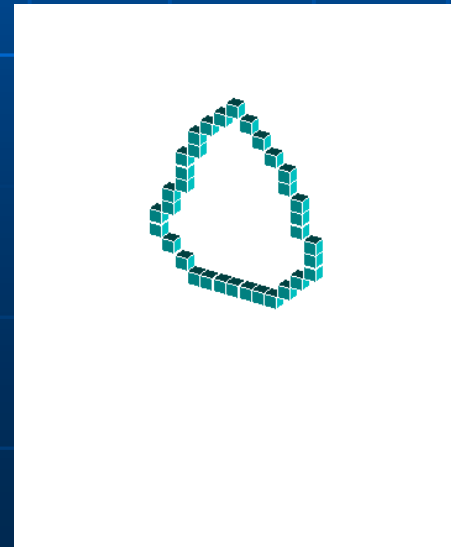


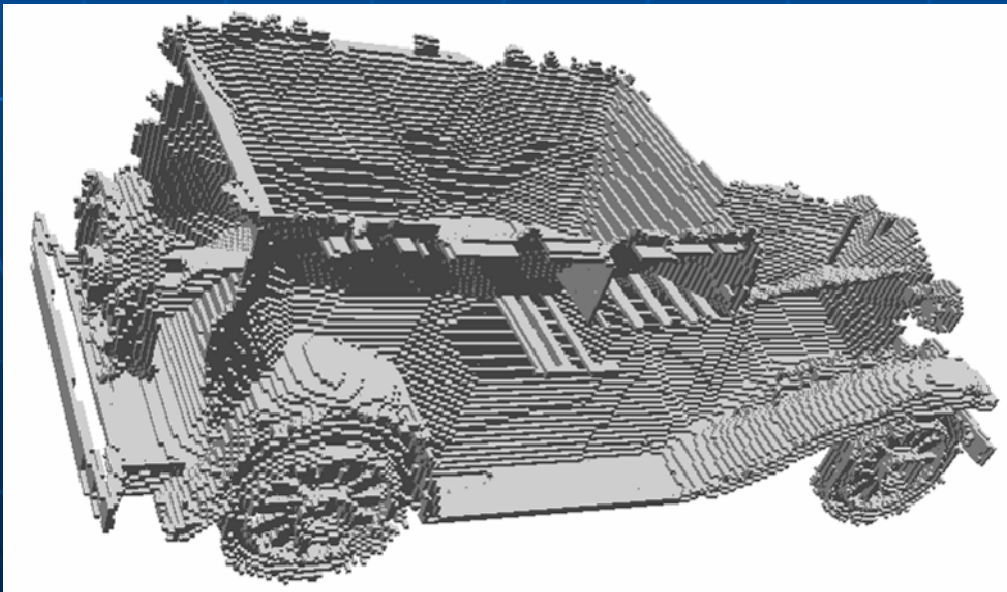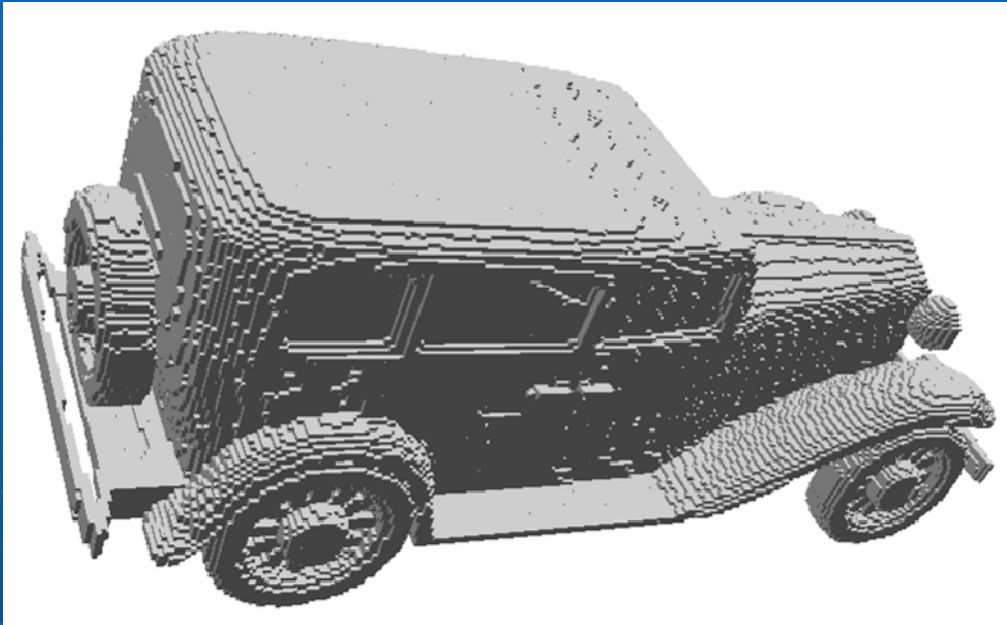

**Example
of medial
surfaces**

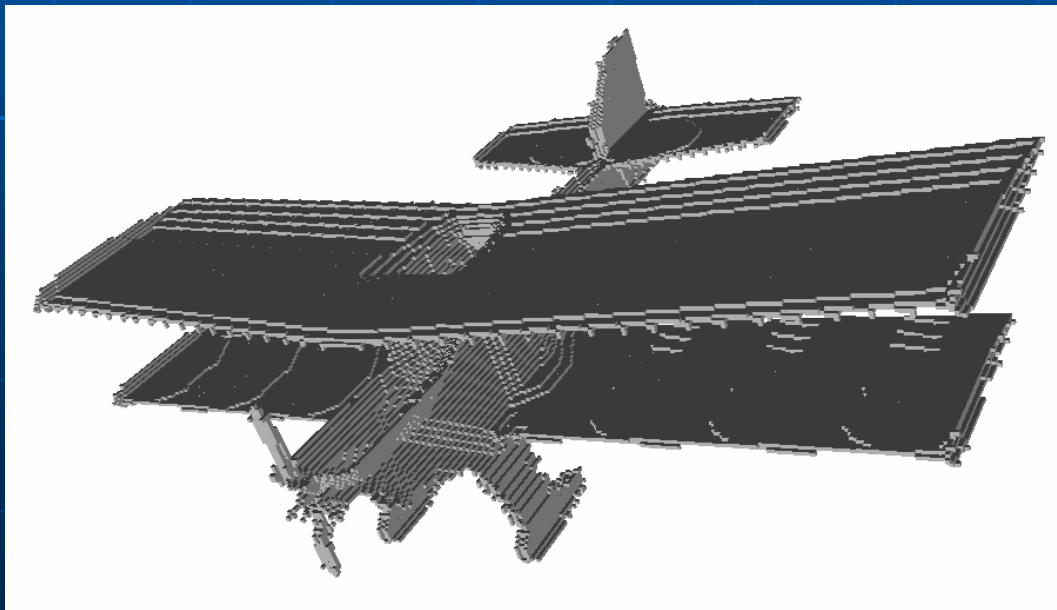
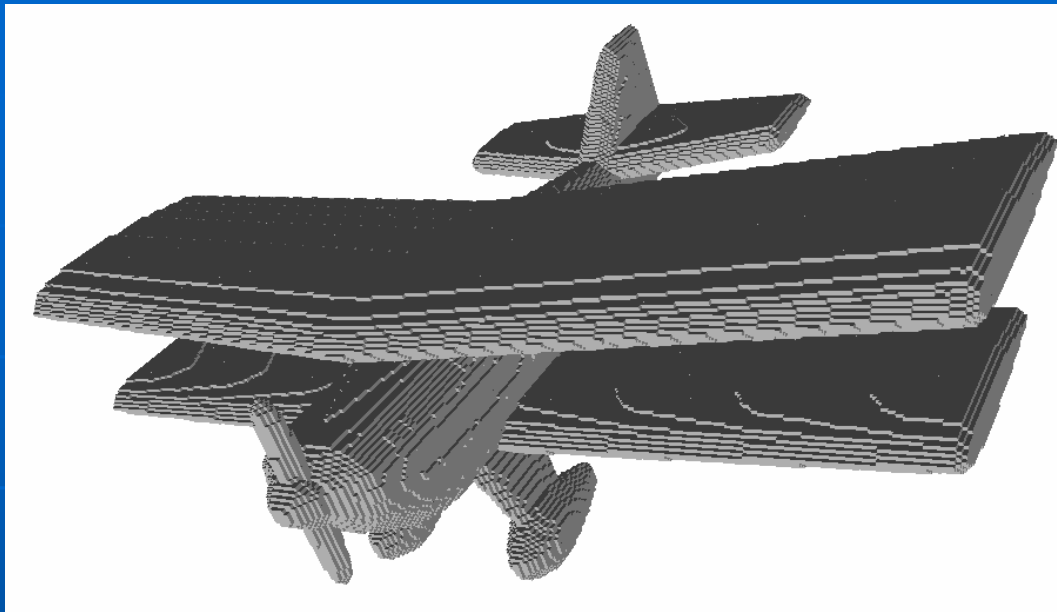


**Example
of medial
surfaces**

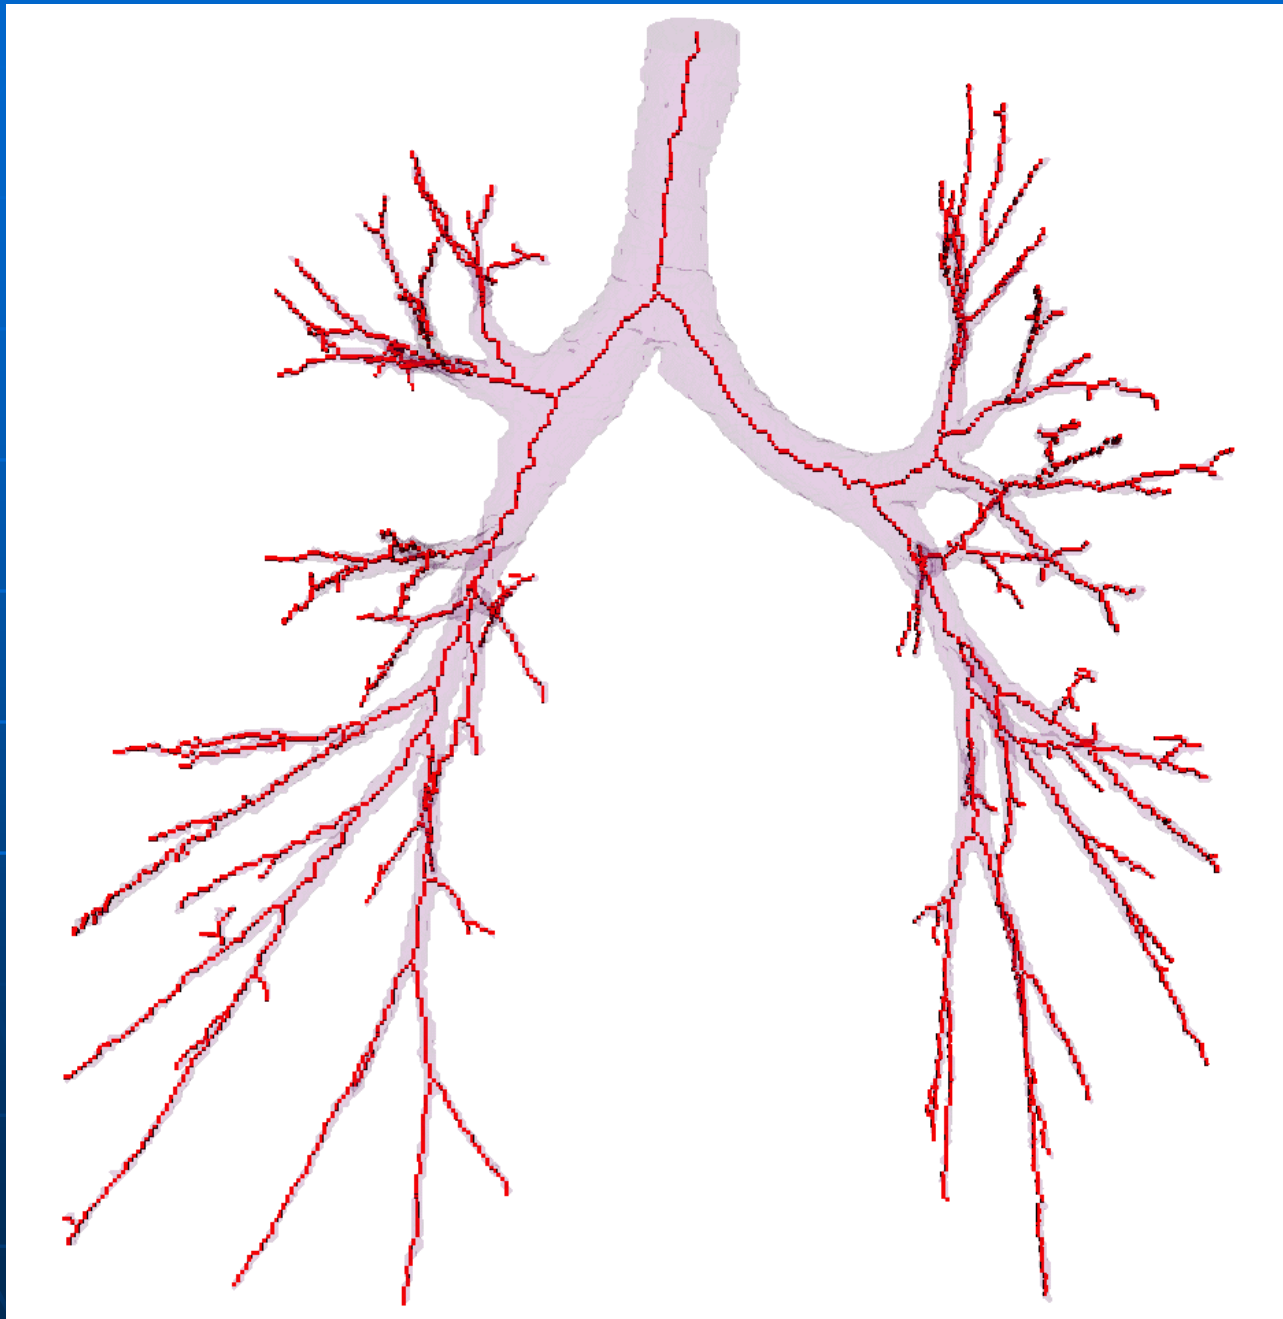


**Example
of medial
lines**

Example of medial lines

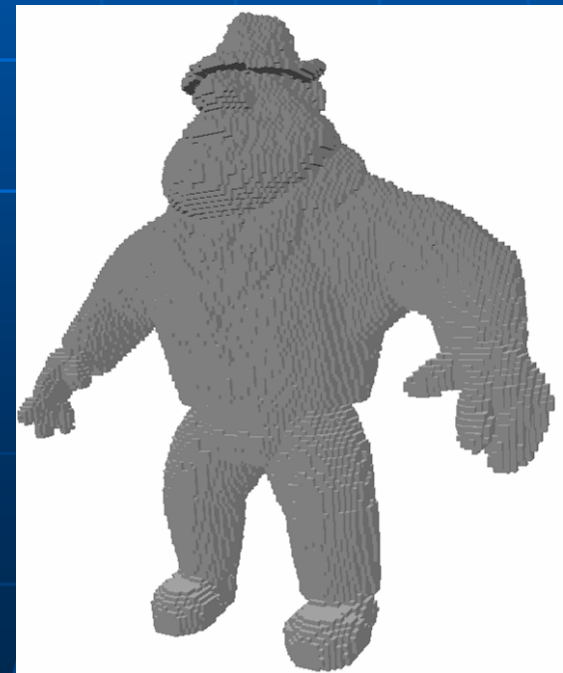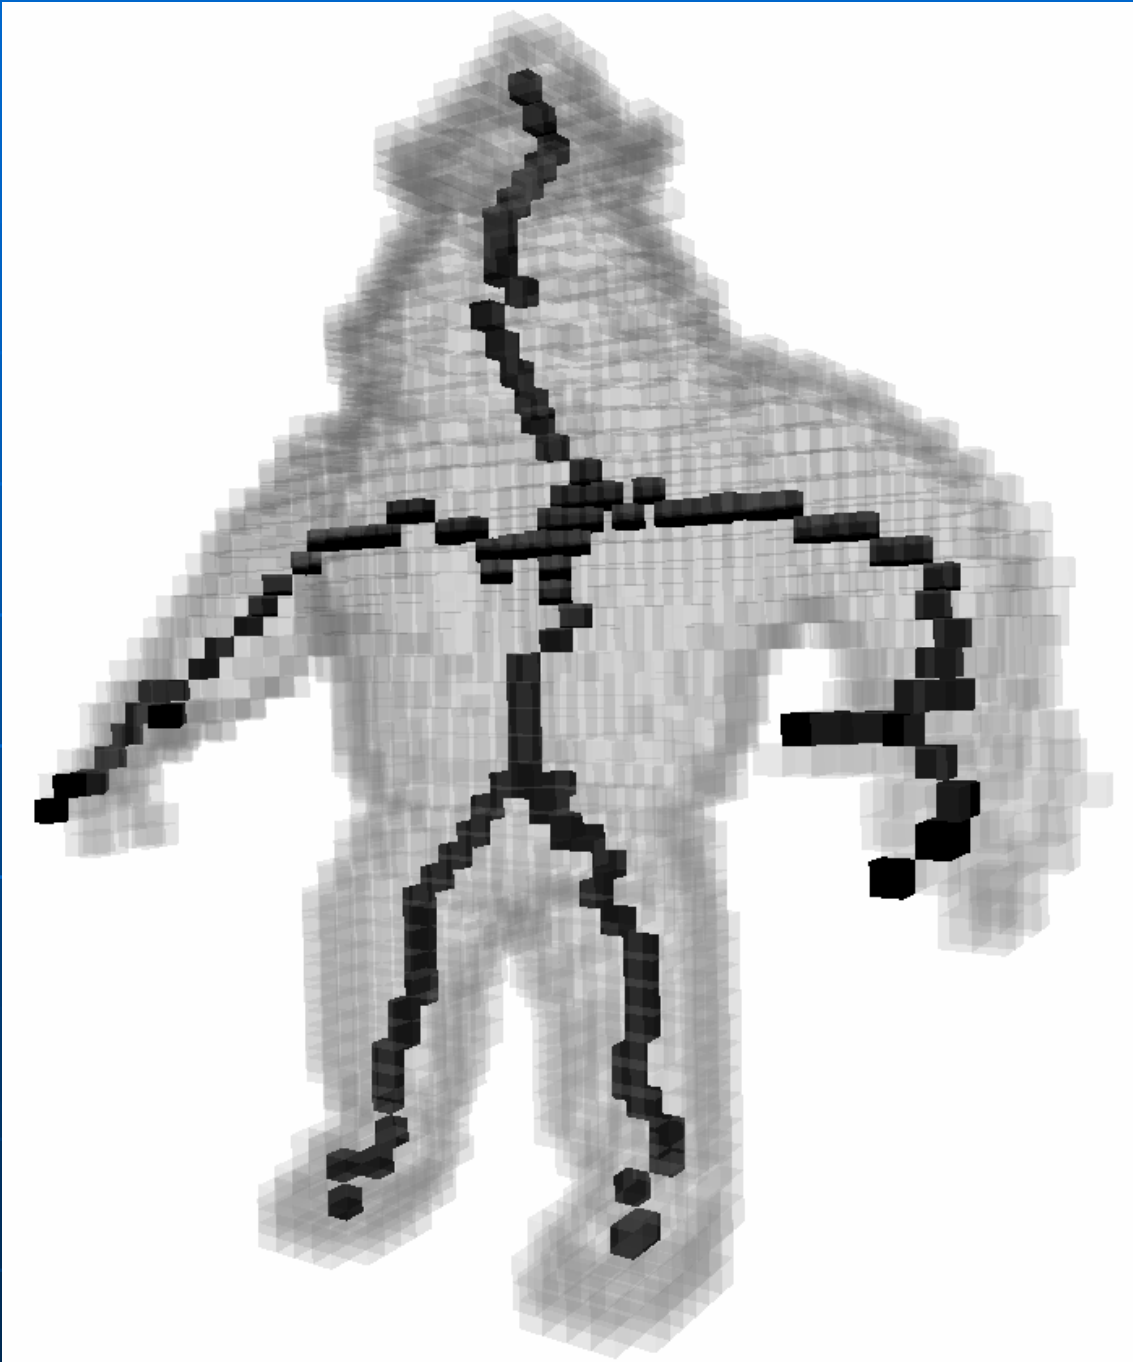


Skeletal points in 2D – points in 3D centerlines

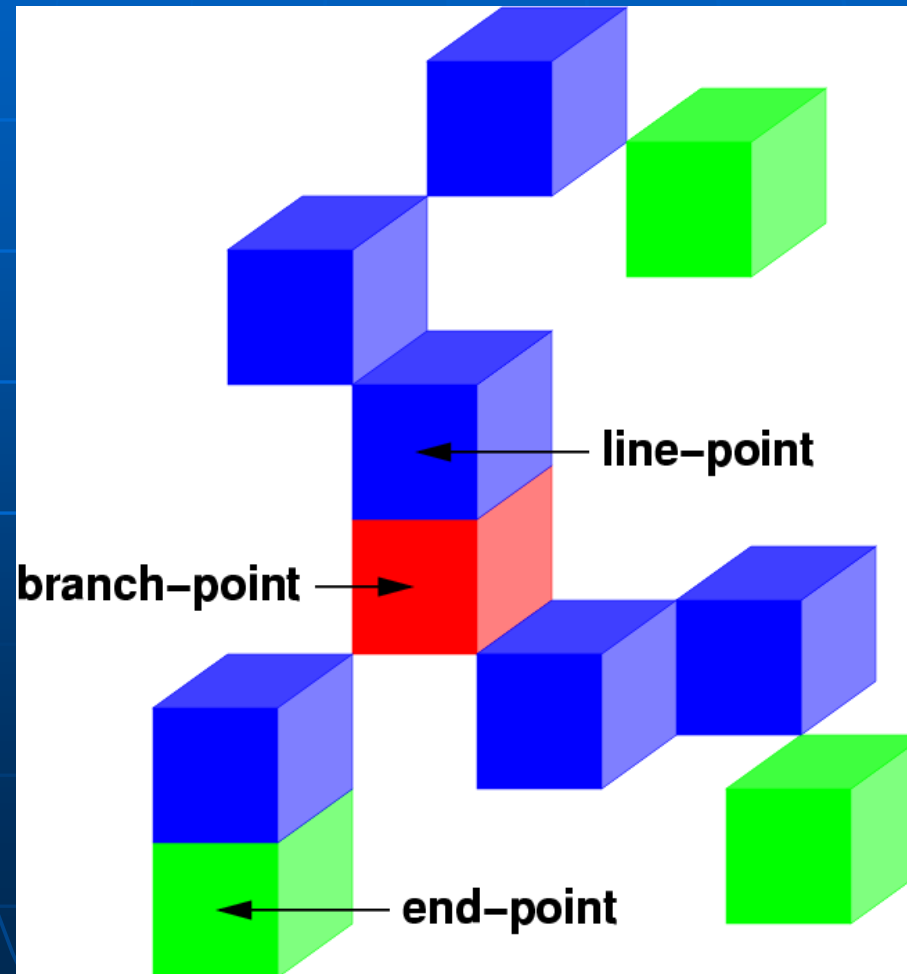

Example of topological kernel

**"If you would know what the
Lord God thinks of money,
you have only to look at
those to whom he gives it."**


(Maurice Baring)

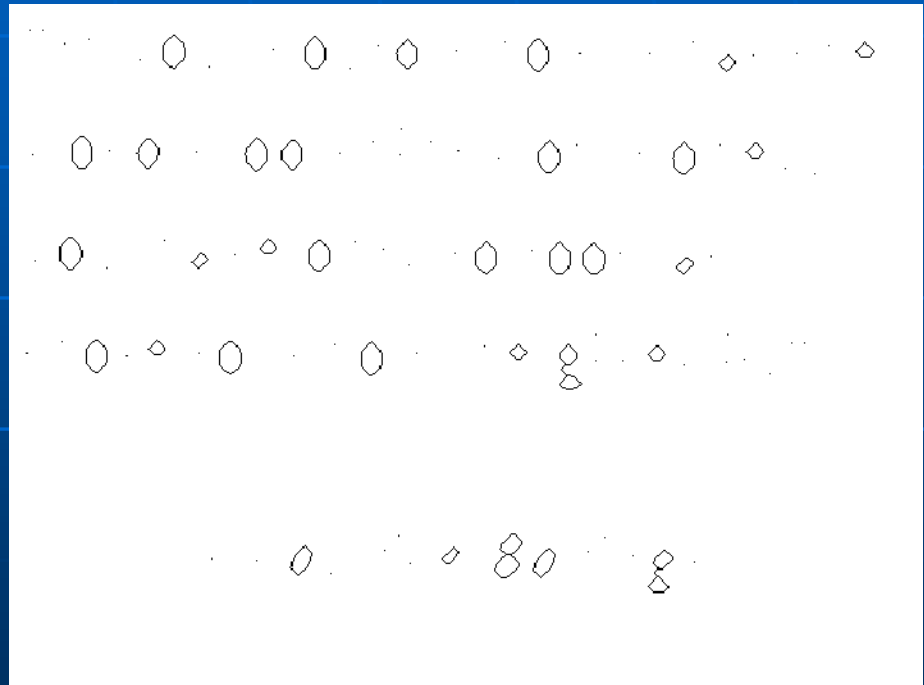

original image


topological kernel

Example of topological kernel

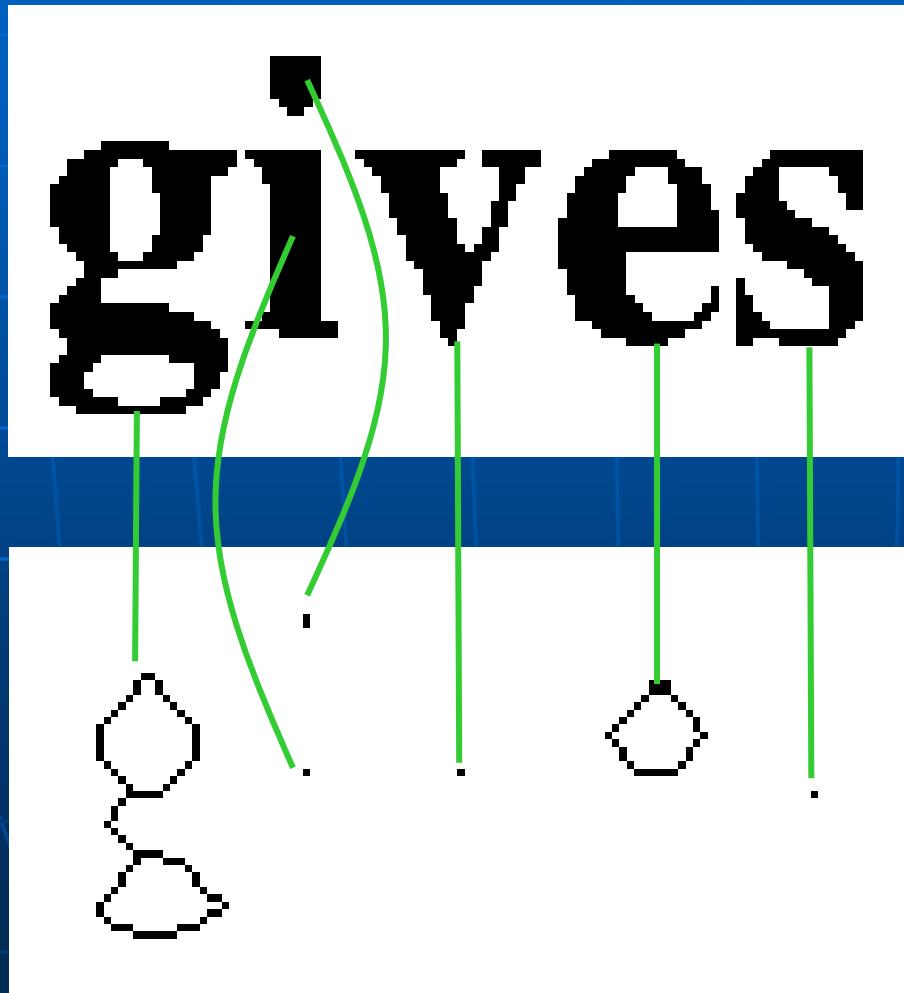

simply connected →
an isolated point

multiply connected →
closed curve

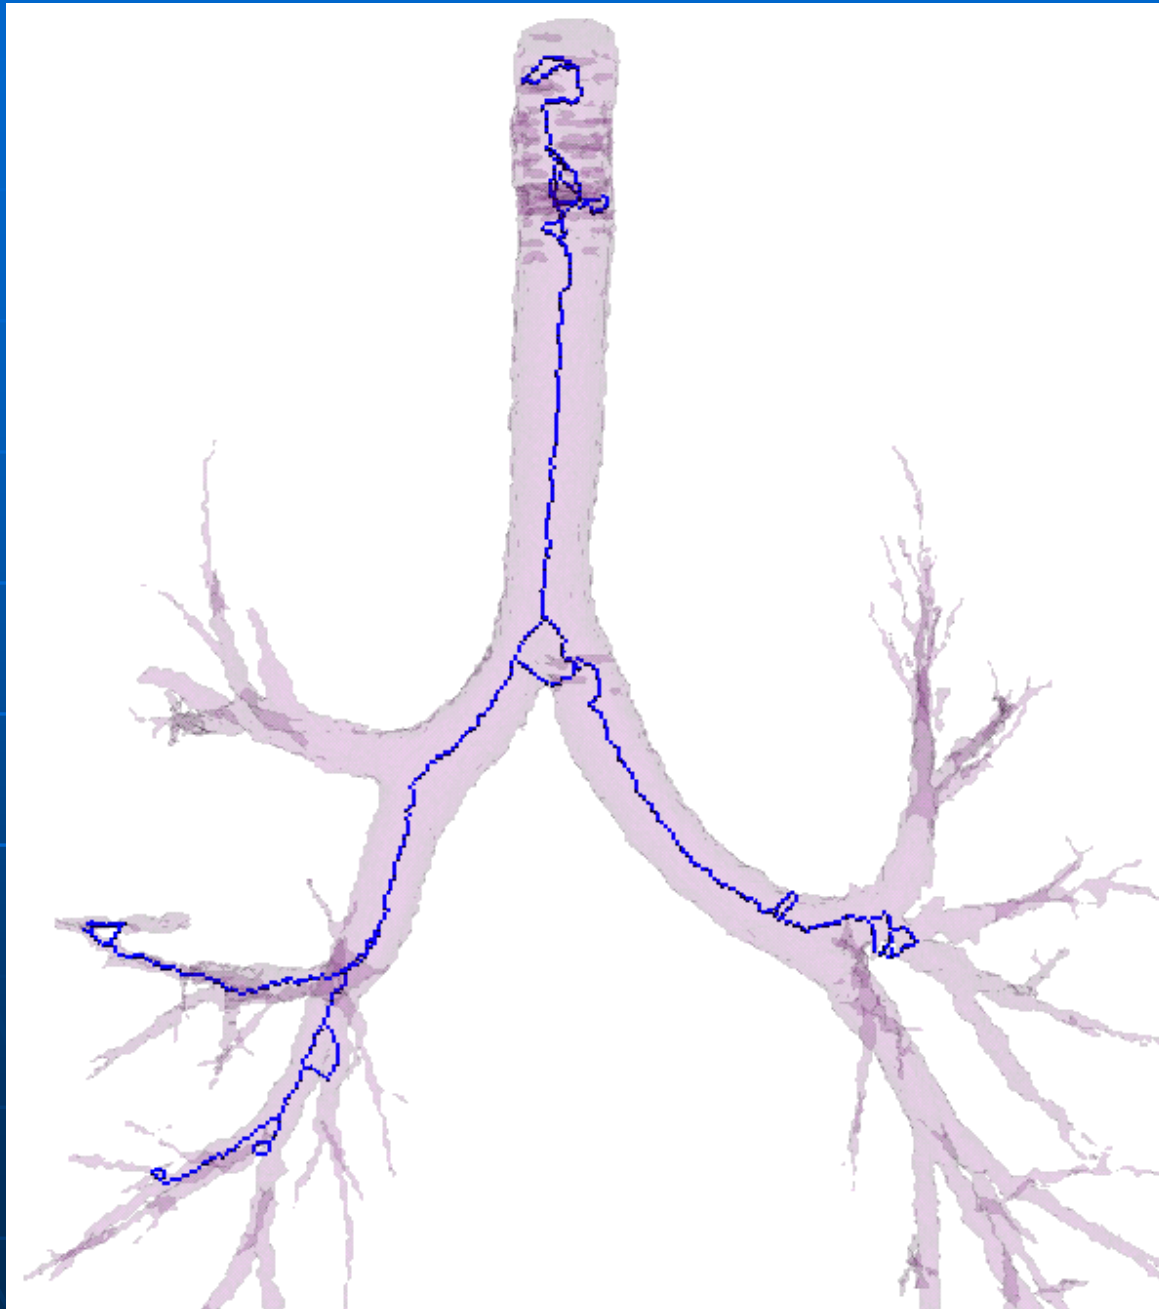

**Example of
topological
kernel**

Skeletonization techniques

- distance transform
- Voronoi diagram
- thinning

Skeletonization techniques

- **distance transform**
- **Voronoi diagram**
- **thinning**

Distance transform


Input:

Binary array A containing feature elements (1's) and non-feature elements (0's).


Output:

Distance map B : non-binary array containing the distance to the closest feature element.

Distance map

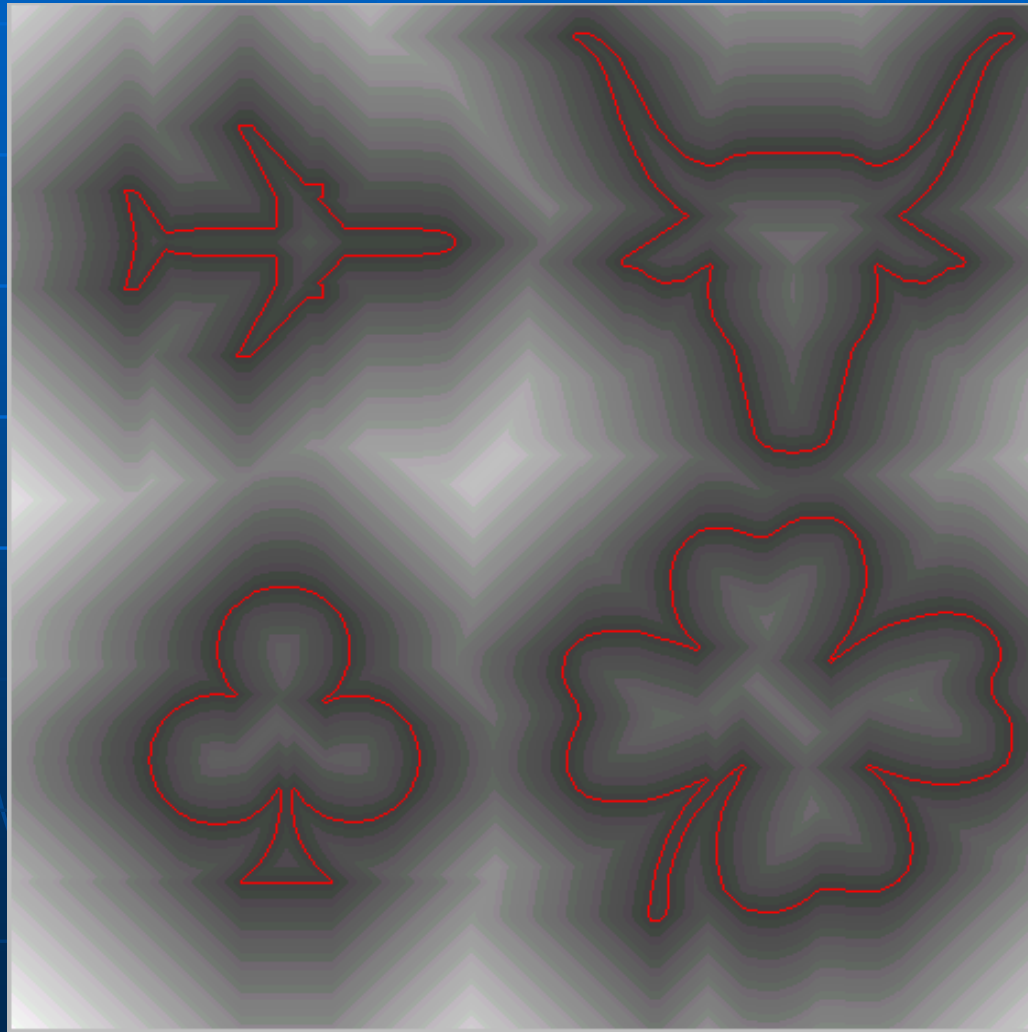

Distance transform

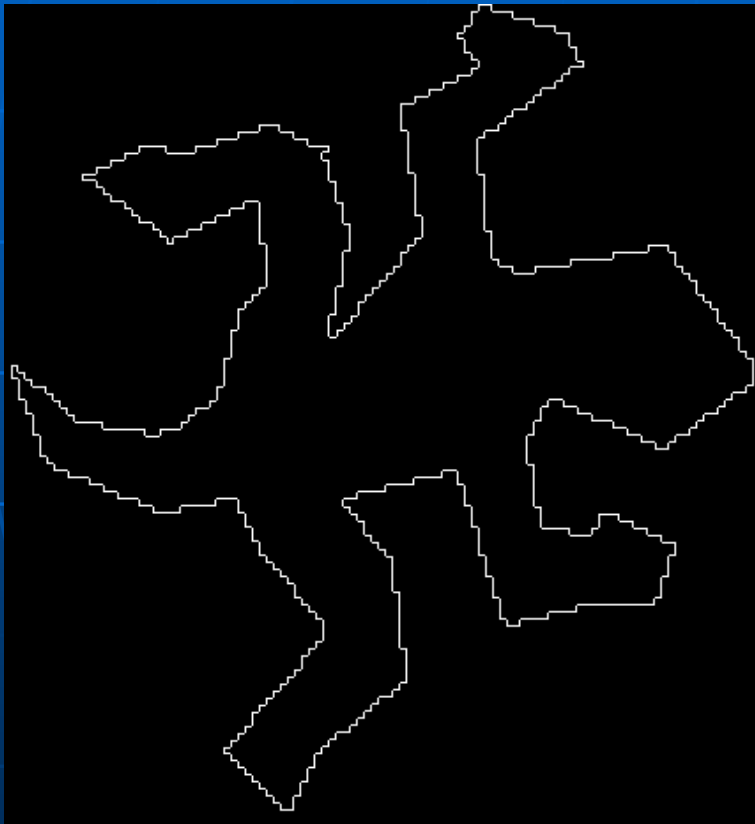


input (binary)



output (non-binary)

Distance transform using city-block (or 4) distance

4	3	2	1	2	3	4
3	2	1	0	1	2	3
2	1	0	1	0	1	2
2	1	0	1	1	0	1
1	0	1	2	2	1	0
1	0	1	2	3	2	1
0	1	2	3	4	3	2

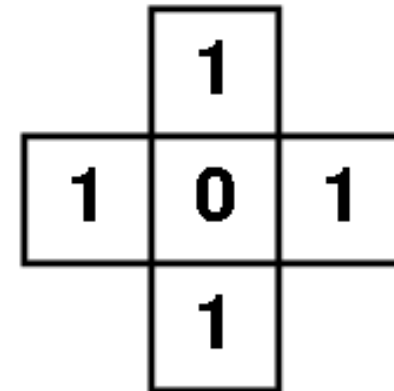

Distance transform using chess-board (or 8) distance

2	2	1	1	1	2	2
2	1	1	0	1	1	2
2	1	0	1	0	1	1
1	1	0	1	1	0	1
1	0	1	1	1	1	0
1	0	1	2	2	1	1
0	1	1	2	2	2	2

1	1	1
1	0	1
1	1	1

Linear-time distance mapping

Input:

Binary array A containing feature elements (1's) and non-feature elements (0's).


Output:

Distance map B : non-binary array containing the distance to the closest feature element.


G. Borgefors (1984)

```
remark initialization
for i=1 to n1 do
  for j=1 to n2 do
    if a(i,j)=1 then b(i,j)=0
    else b(i,j)=∞
remark forward scan
for i=1 to n1 do
  for j=1 to n2 do
    b(i,j)=min{
      b(i-1,j-1)+d2,
      b(i-1,j )+d1,
      b(i-1,j+1)+d2,
      b(i ,j-1)+d1,
      b(i ,j )
    }
remark backward scan
for i=n1 downto 1 do
  for j=n2 downto 1 do
    b(i,j)=min{
      b(i ,j ) ,
      b(i ,j+1)+d1,
      b(i+1,j-1)+d2,
      b(i+1,j )+d1,
      b(i+1,j+1)+d2
    }
```

Linear-time distance mapping

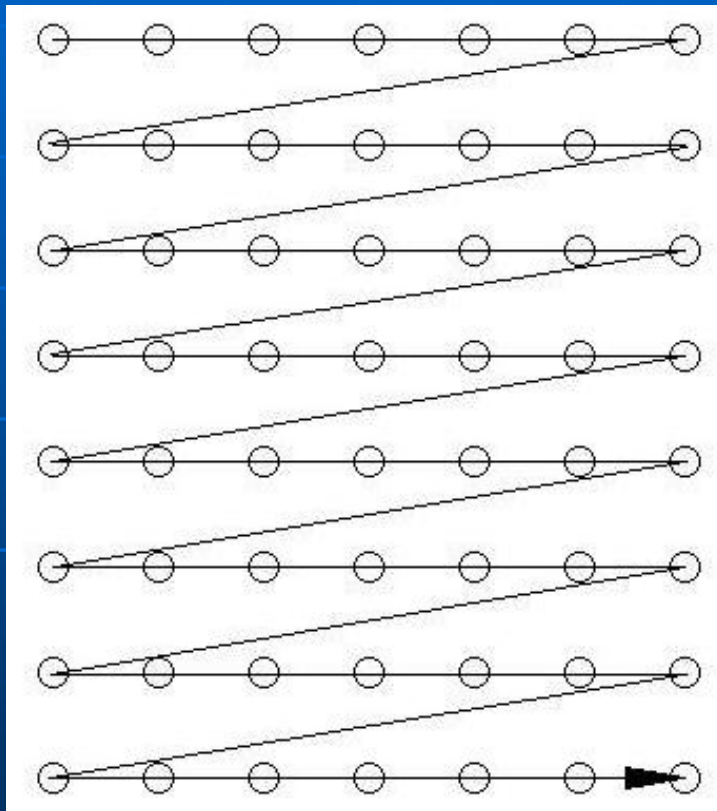


forward scan

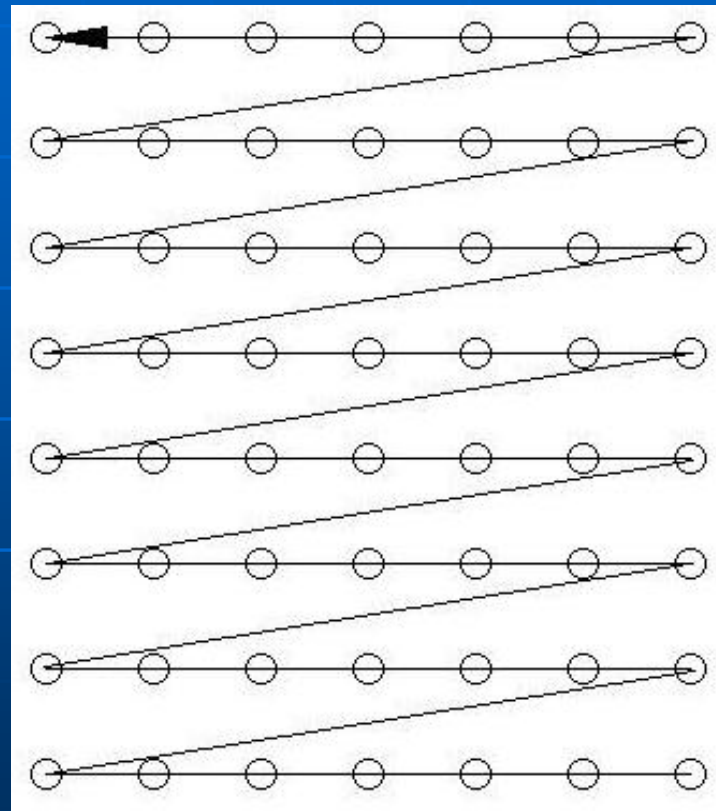


backward scan

Linear-time distance mapping

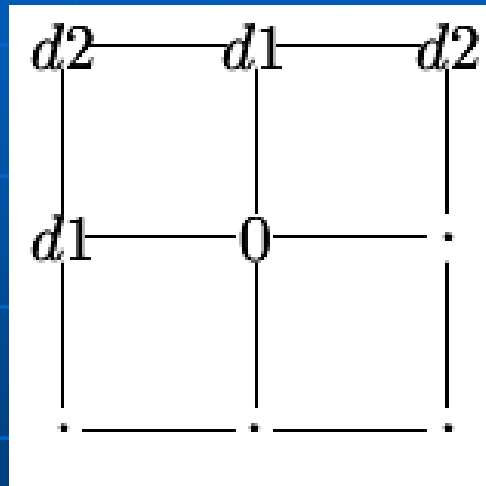

forward scan

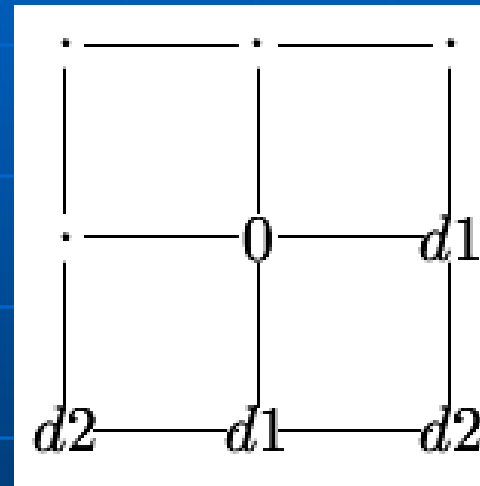


backward scan

best choice: $d1=3$, $d2=4$

Distance-based skeletonization


1. Border points (as feature elements) are extracted from the original binary image.
2. Distance transform is executed (i.e., distance map is generated).
3. The ridges (local extremas) are detected as skeletal points.

Distance-based skeletonization – step 1

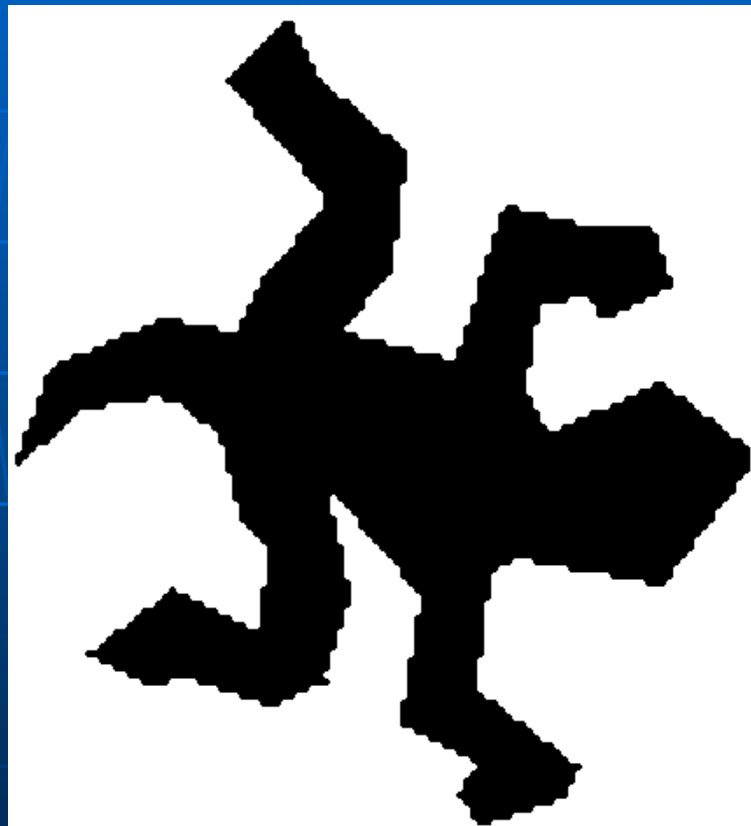



detecting border points

Distance-based skeletonization – step 2

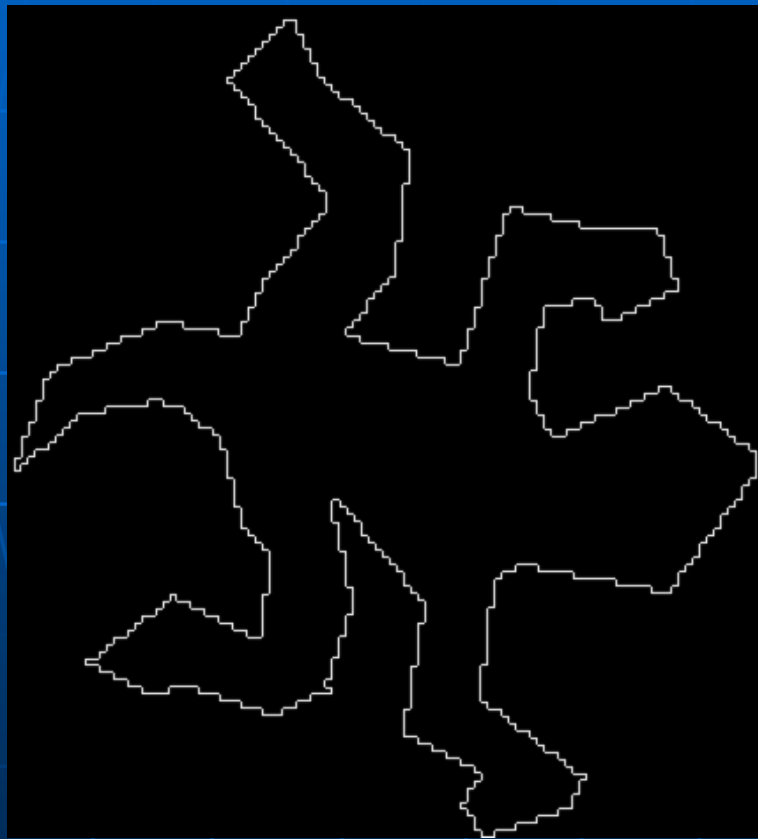



distance mapping

Distance-based skeletonization – step 3

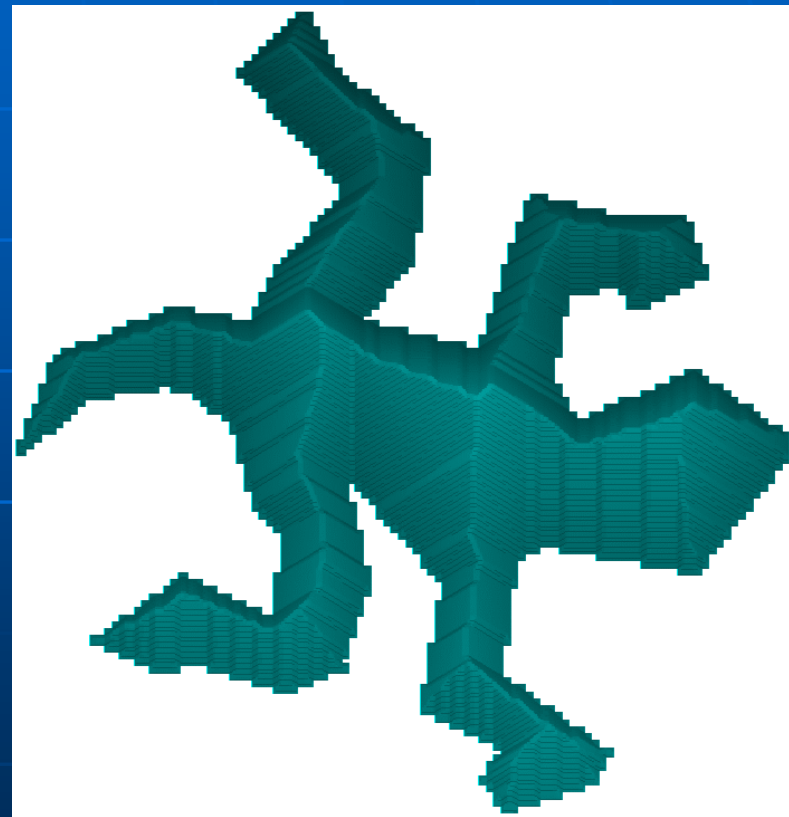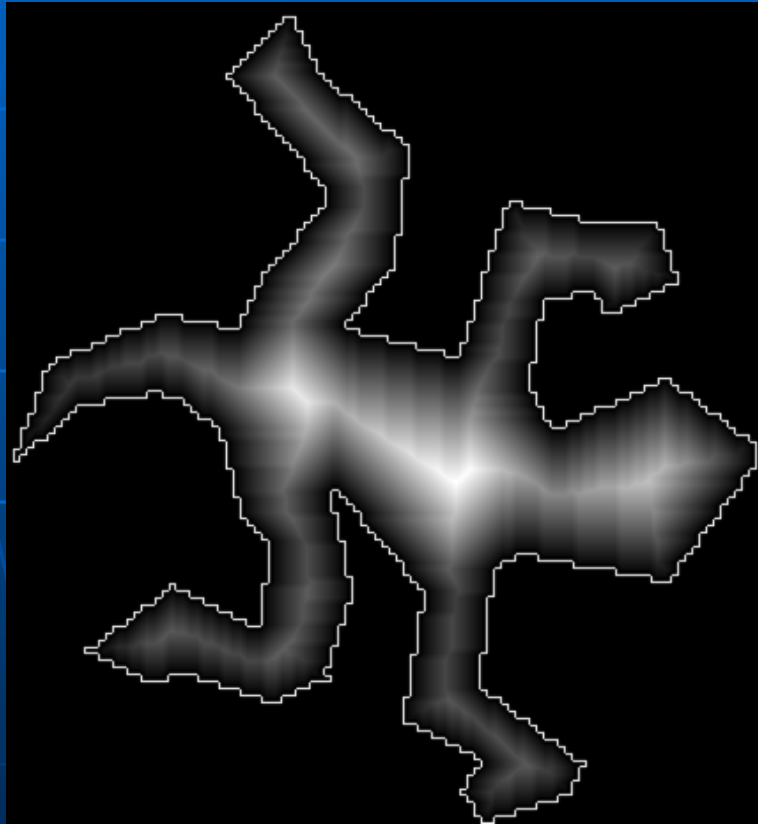

detecting ridges (local extremas)

Distance-based skeletonization – step 3

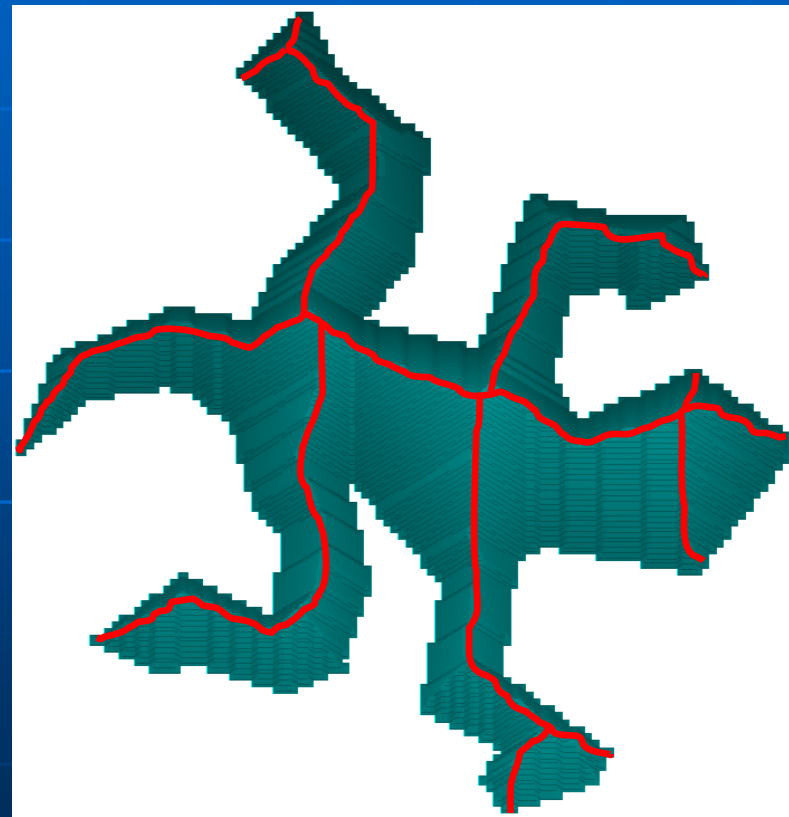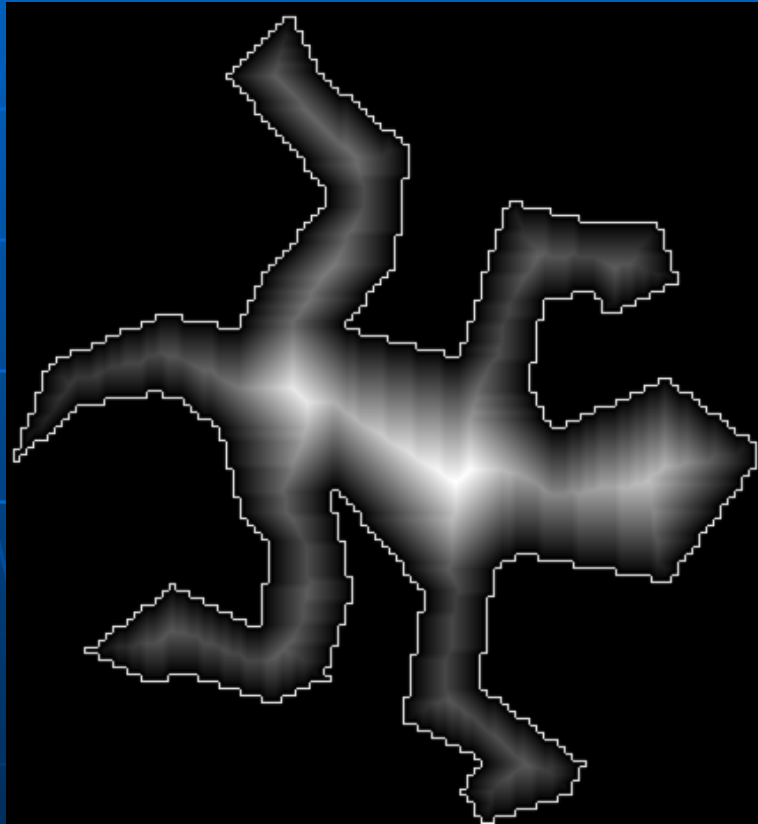

detecting ridges (local extremas)



M.C. Escher: Reptiles

Skeletonization techniques

- distance transform
- **Voronoi diagram**
- thinning


Voronoi diagram

Input:


Set of points (generating points)

Output:

the partition of the space into cells so that each cell contains exactly one generating point and the locus of all points which are closer to this generating point than to others.

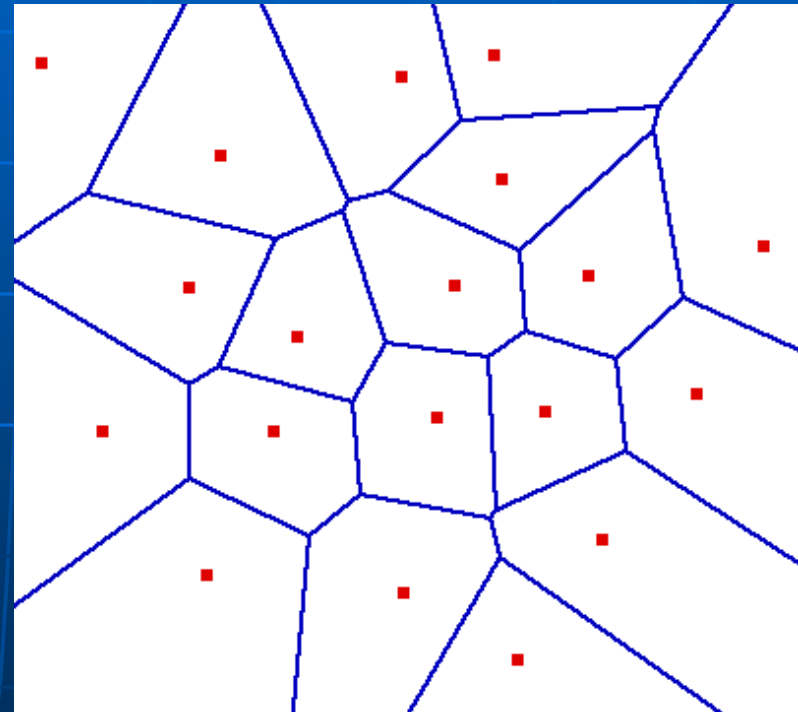


Voronoi diagram

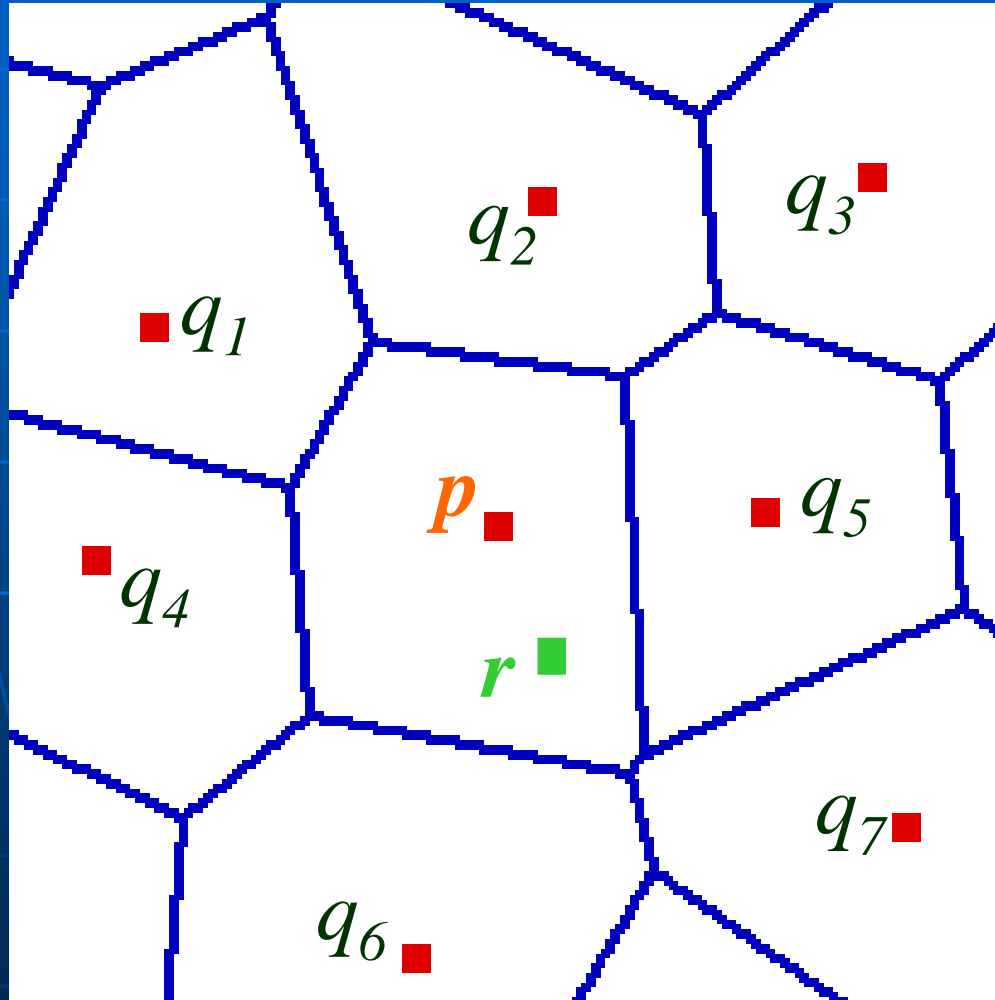

$$d(r, p) \leq d(r, q_i)$$


($i = 1, 2, \dots$)

Voronoi diagram in 3D

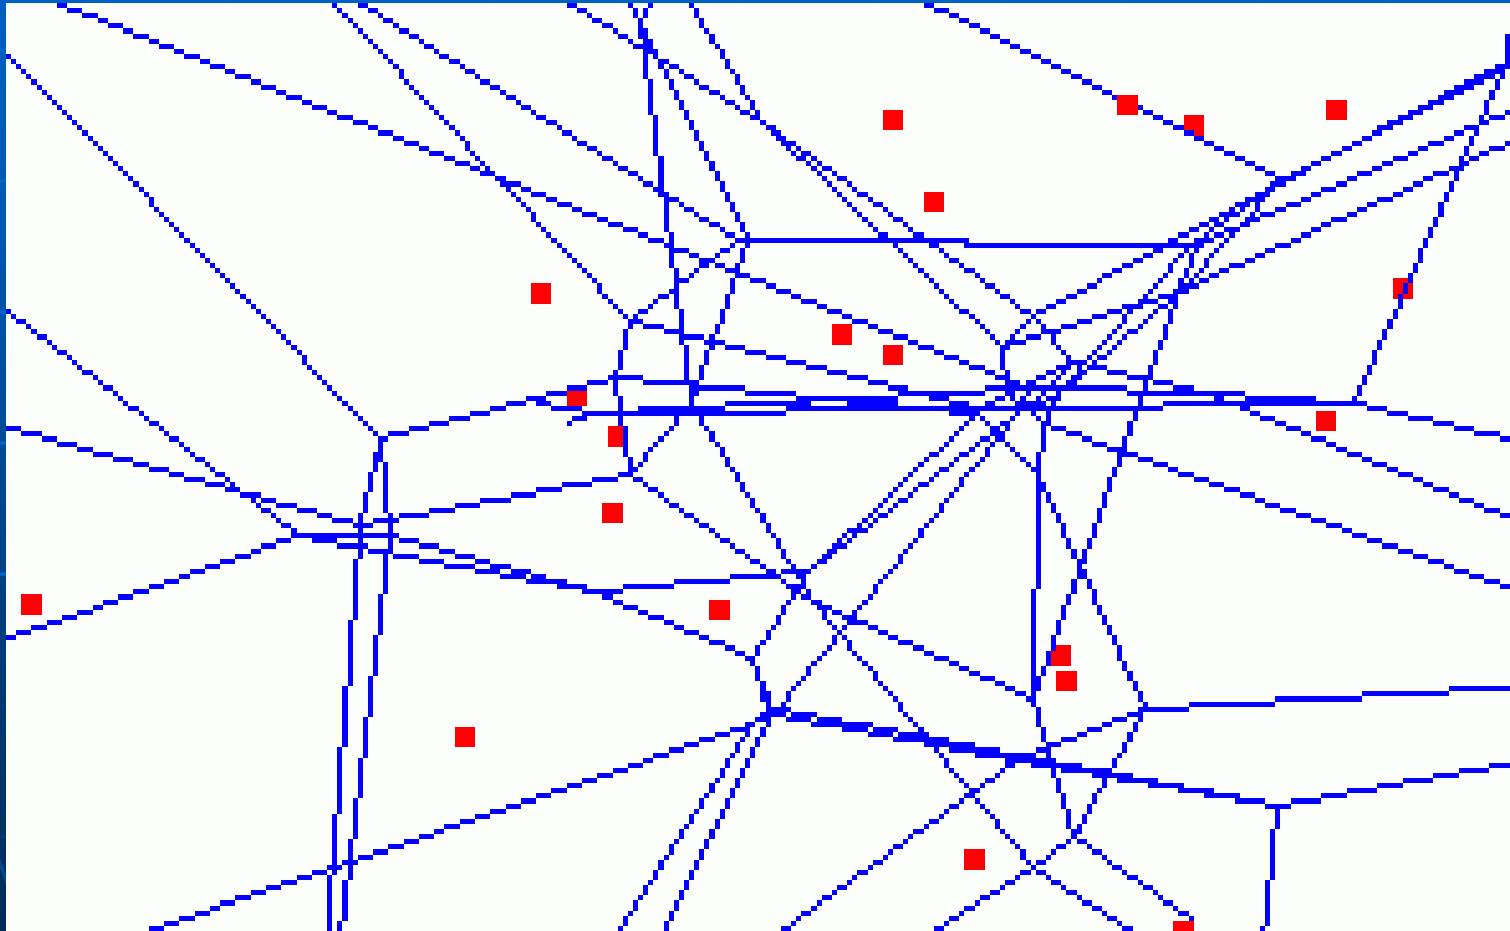

Voronoi diagram of 20 generating points


Voronoi diagram in 3D

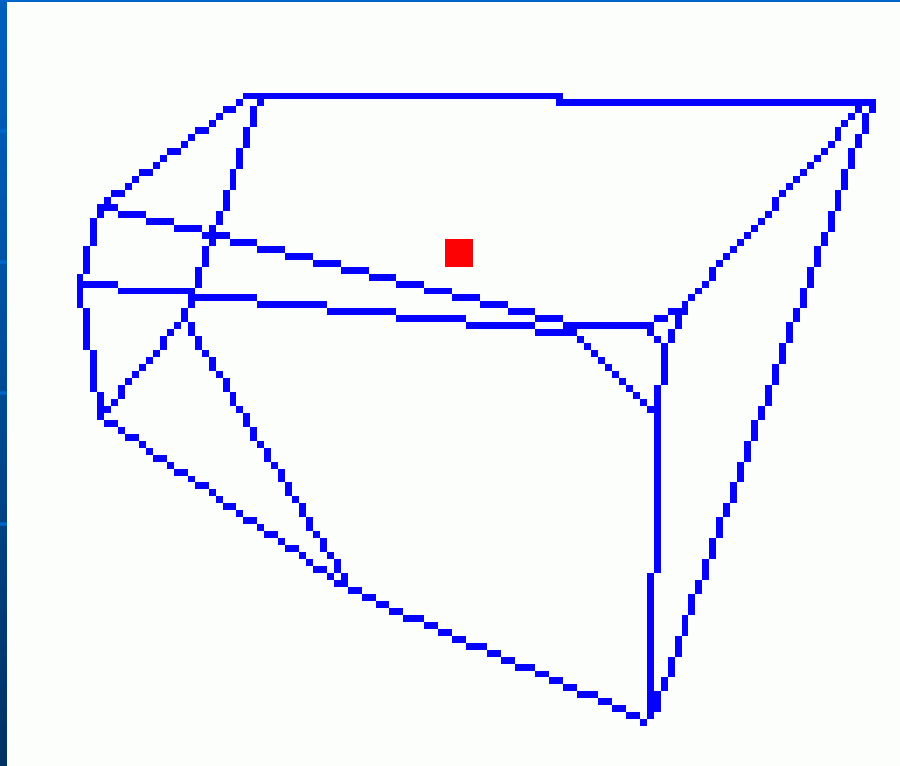

a cell (convex polyhedron) of that Voronoi diagram

Incremental construction


$$O(n)$$

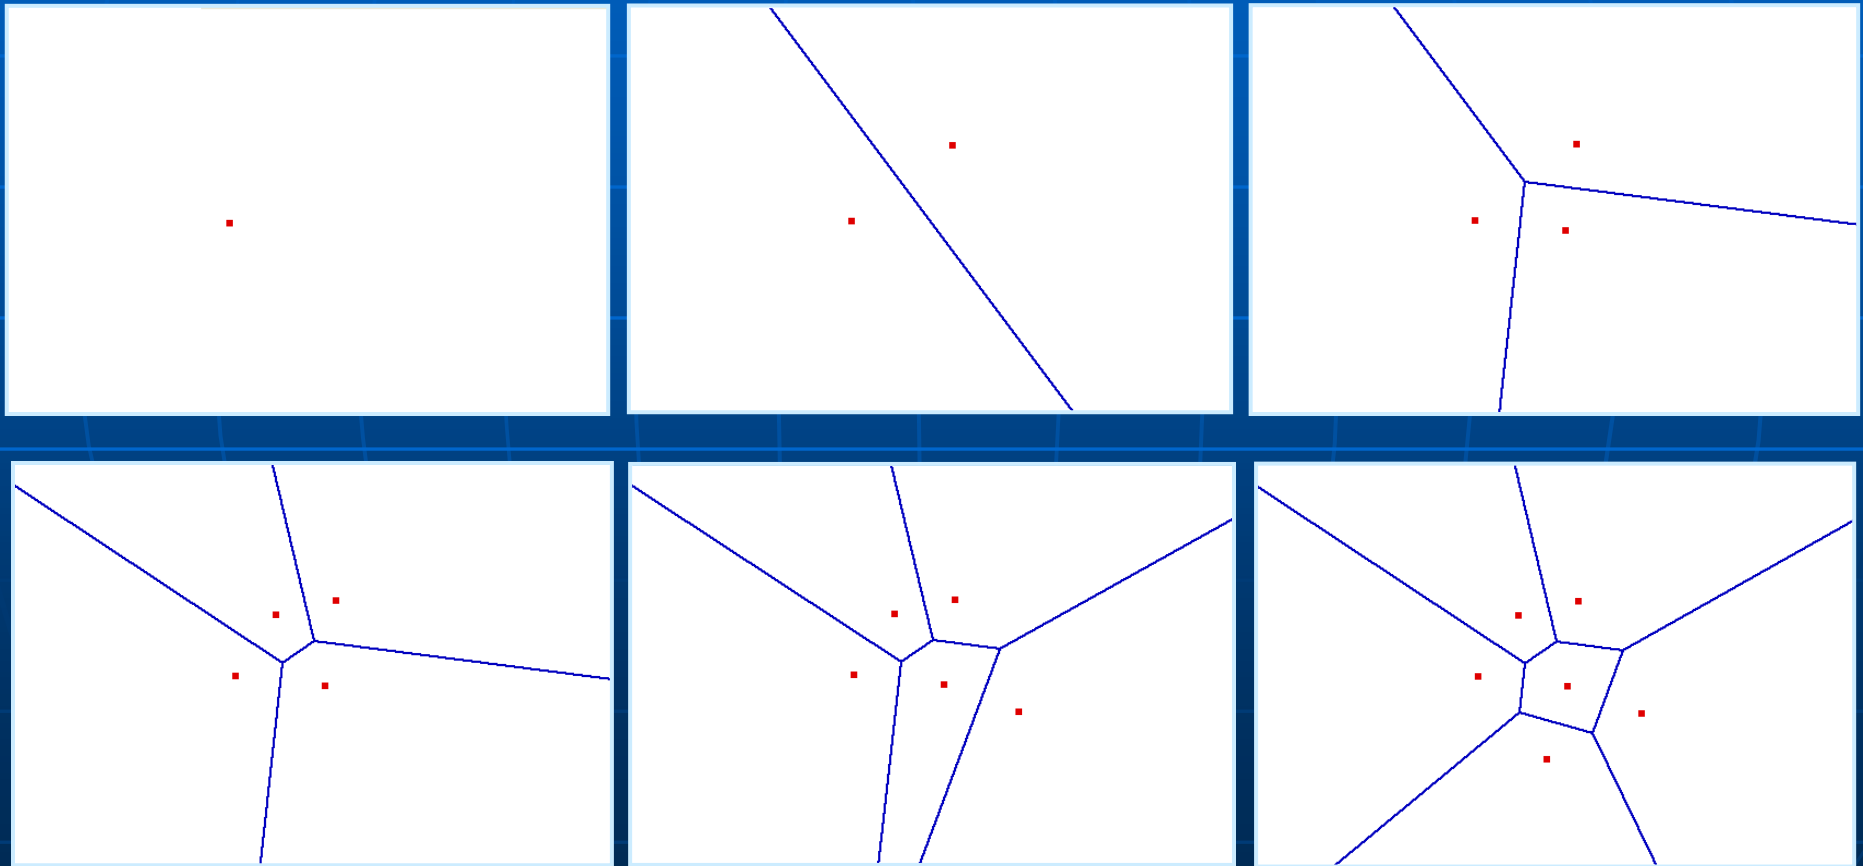

Divide and conquer

$$O(n \cdot \log n)$$


left
diagram

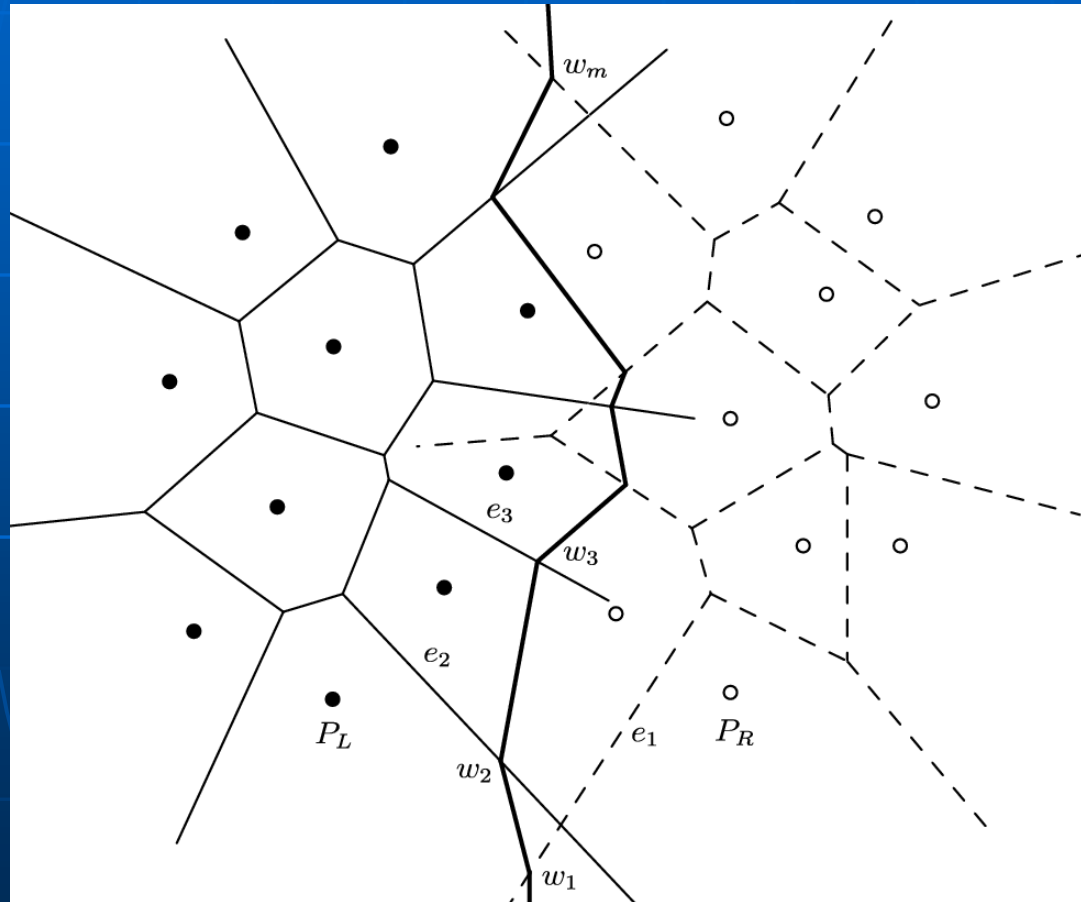

right
diagram


merging

Voronoi diagram - skeleton

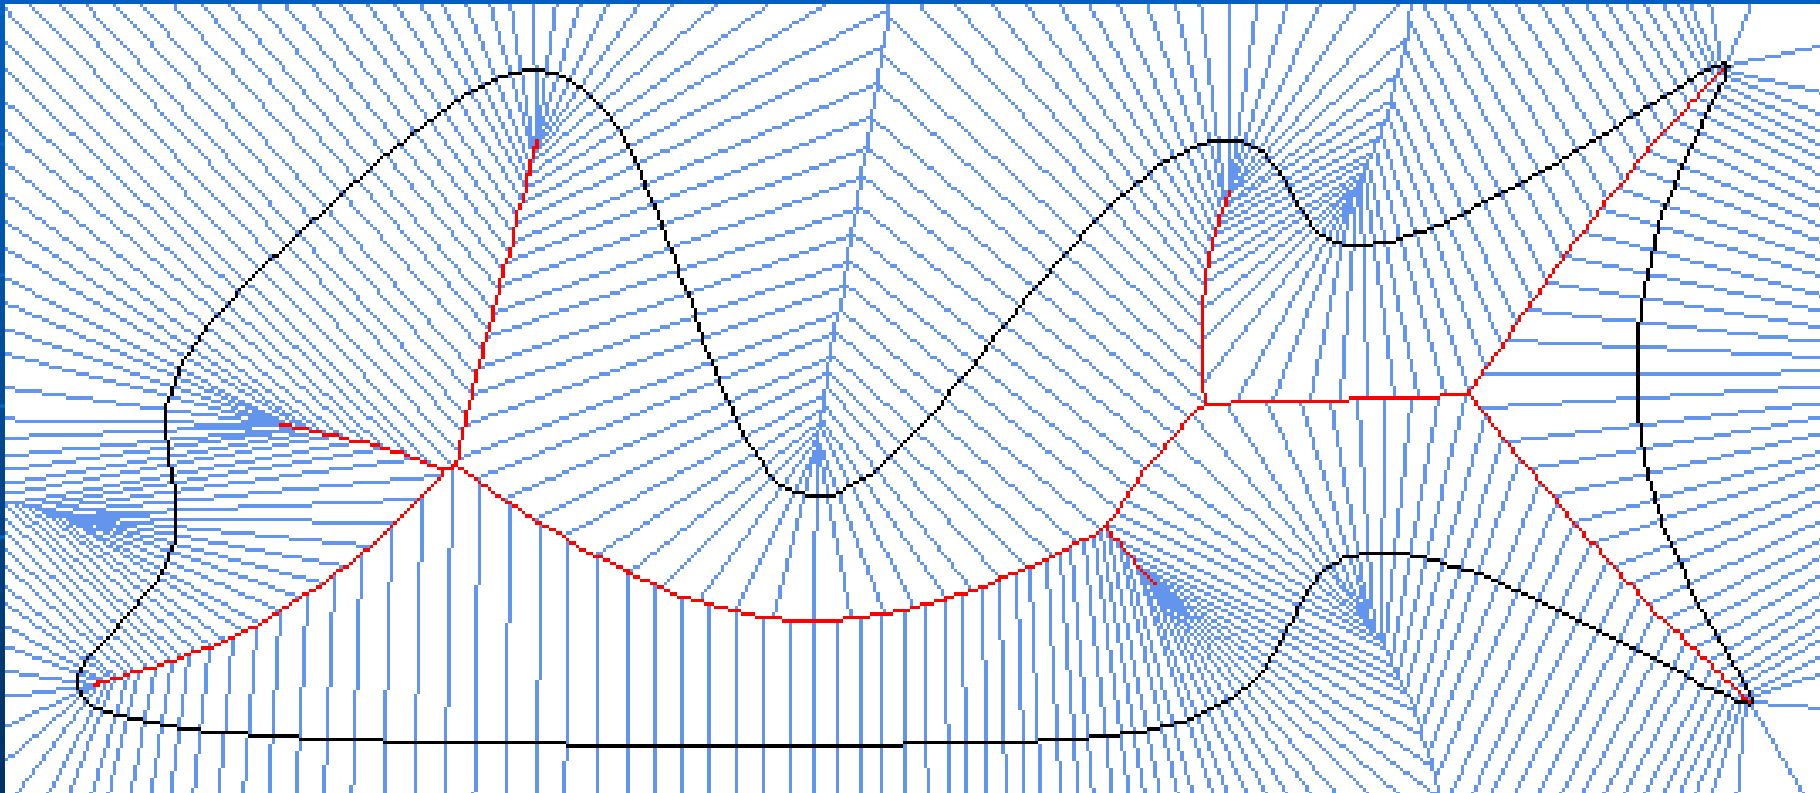


set of generating points = sampled boundary

Voronoi diagram - skeleton

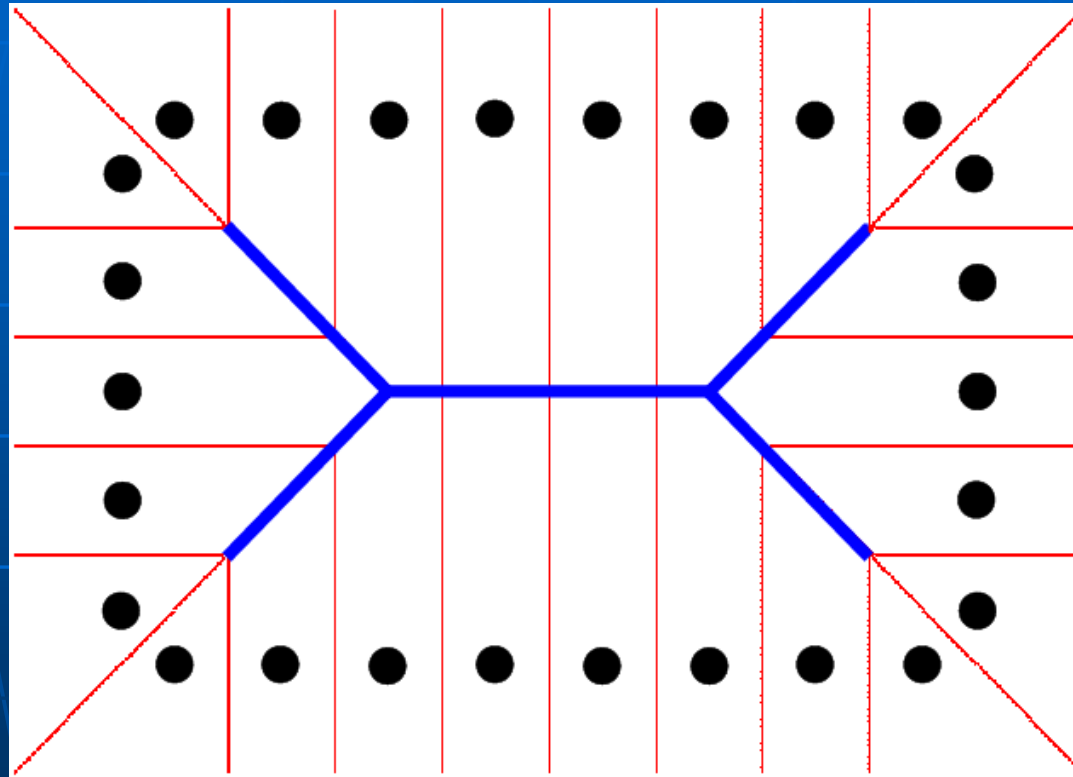

If the density of boundary points goes to infinity, then the corresponding Voronoi diagram converges to the skeleton.

Voronoi skeleton

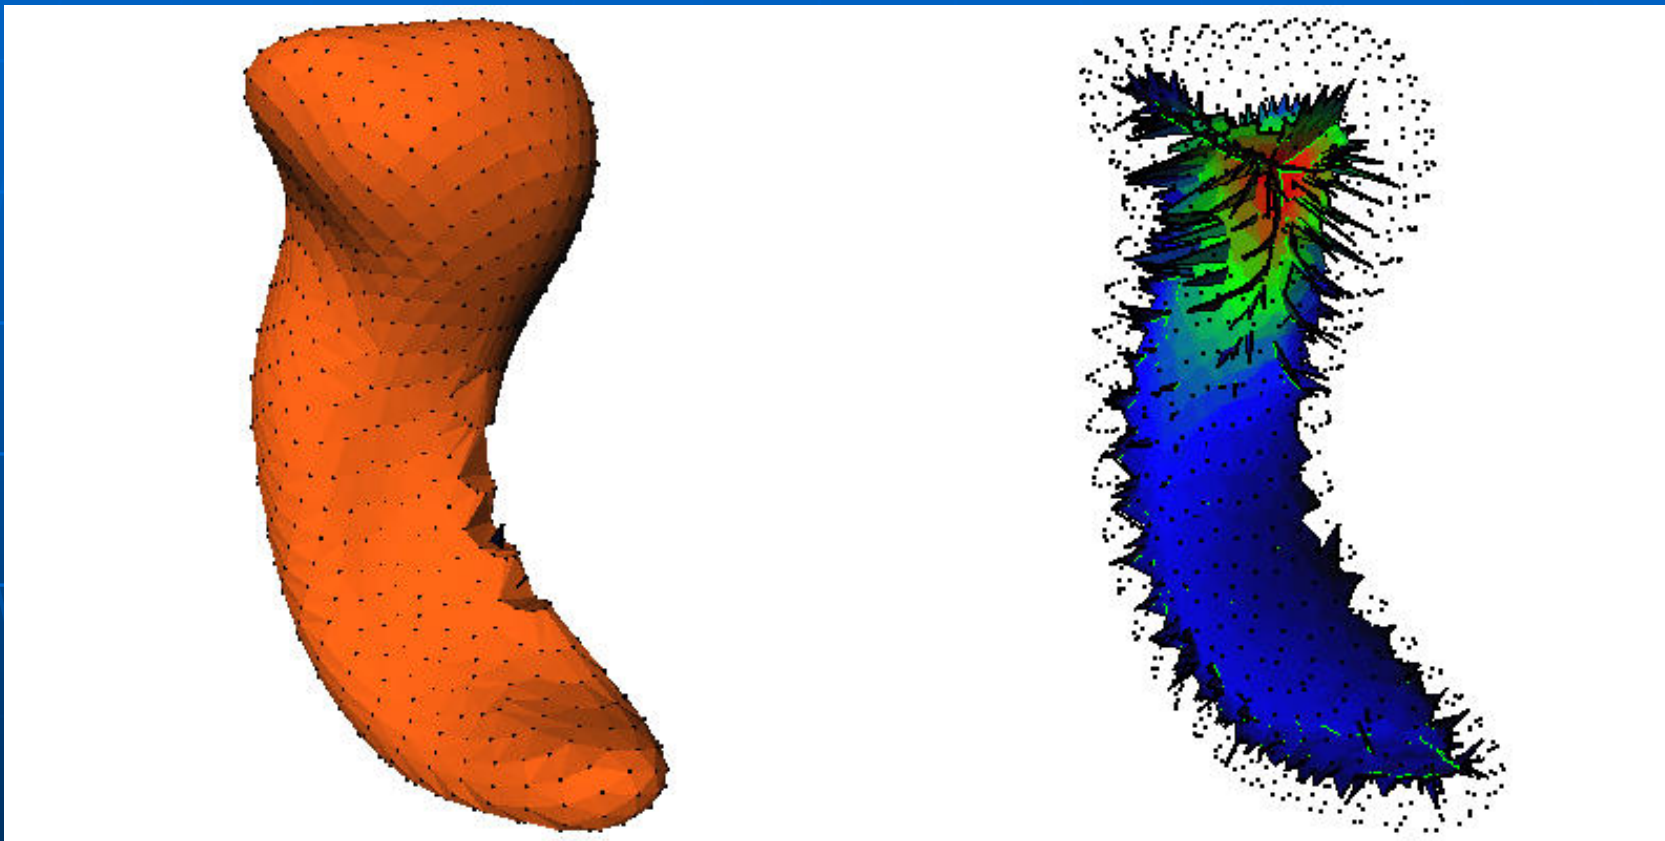

original 3D object

Voronoi skeleton

M. Styner (UNC, Chapel Hill)


Skeletonization techniques

- distance transform
- Voronoi diagram
- thinning

„Thinning”



Thinning

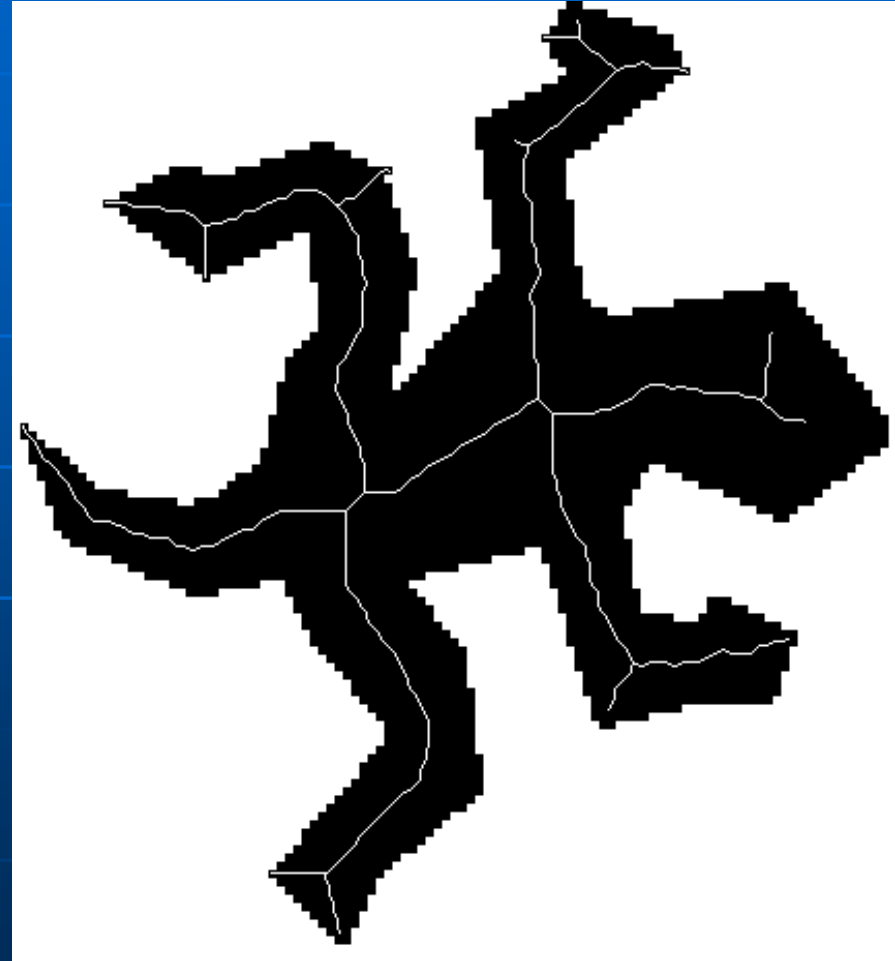


modeling fire-front propagation

Iterative object reduction



original
object

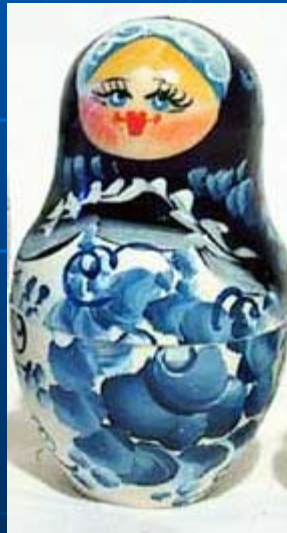

reduced
structure

Matryoshka:
Russian nesting wooden doll.

Thinning algorithms

repeat

remove „*deletable*” border points
from the actual binary image


} one
iteration
step

until no points are deleted

degrees of freedom:


- which points are regarded as „*deletable*” ?
- how to organize one iteration step?

One iteration step

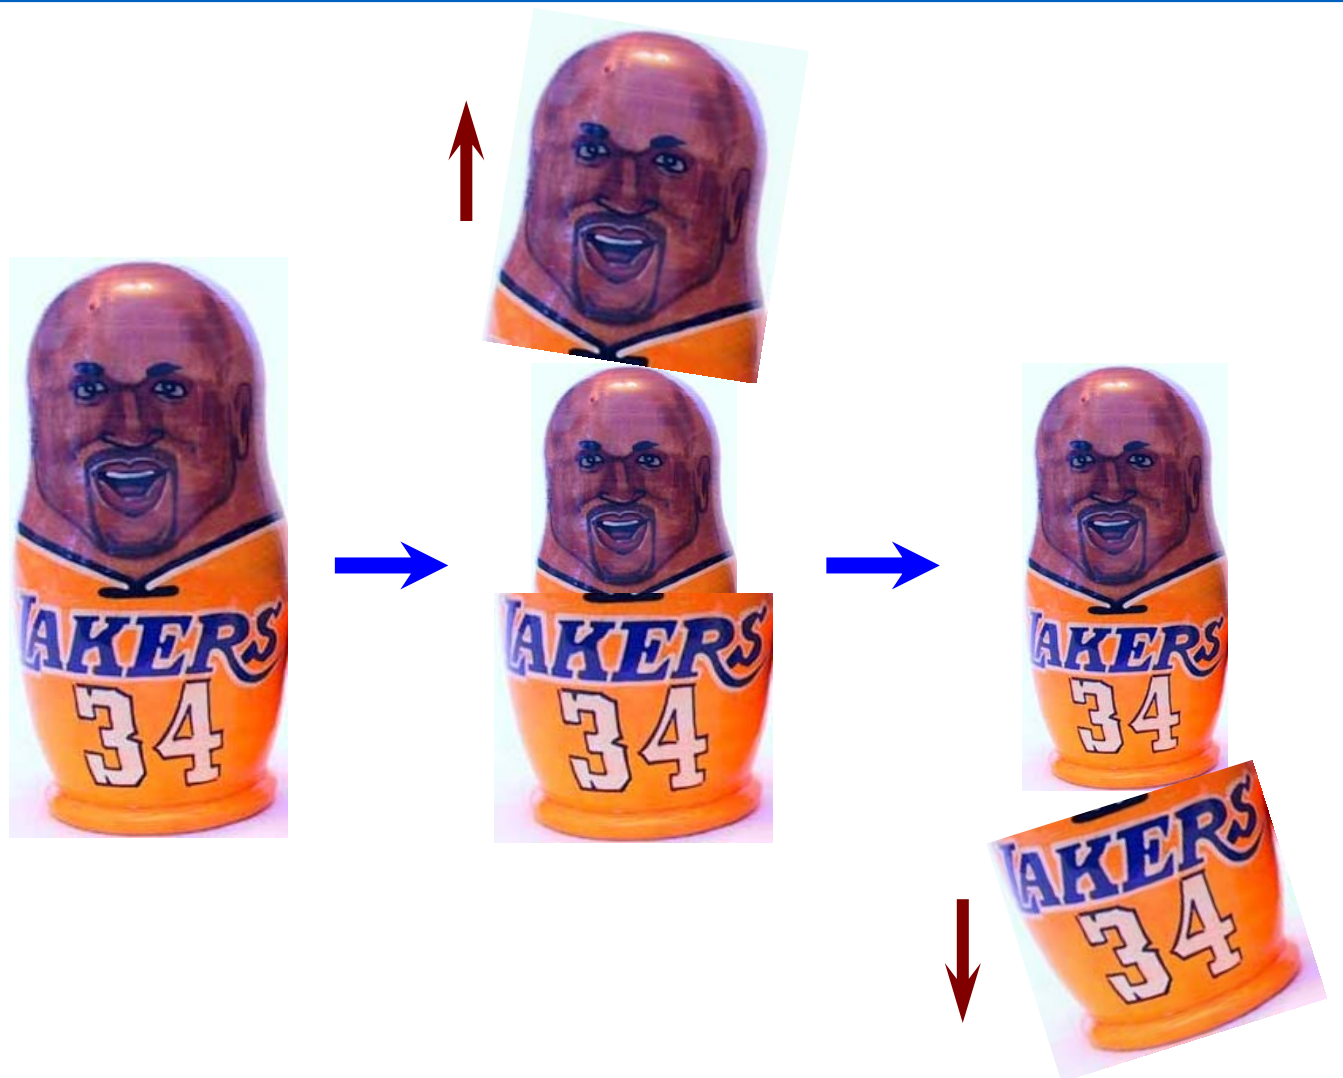


Topology preservation in 2D

(a counter example)

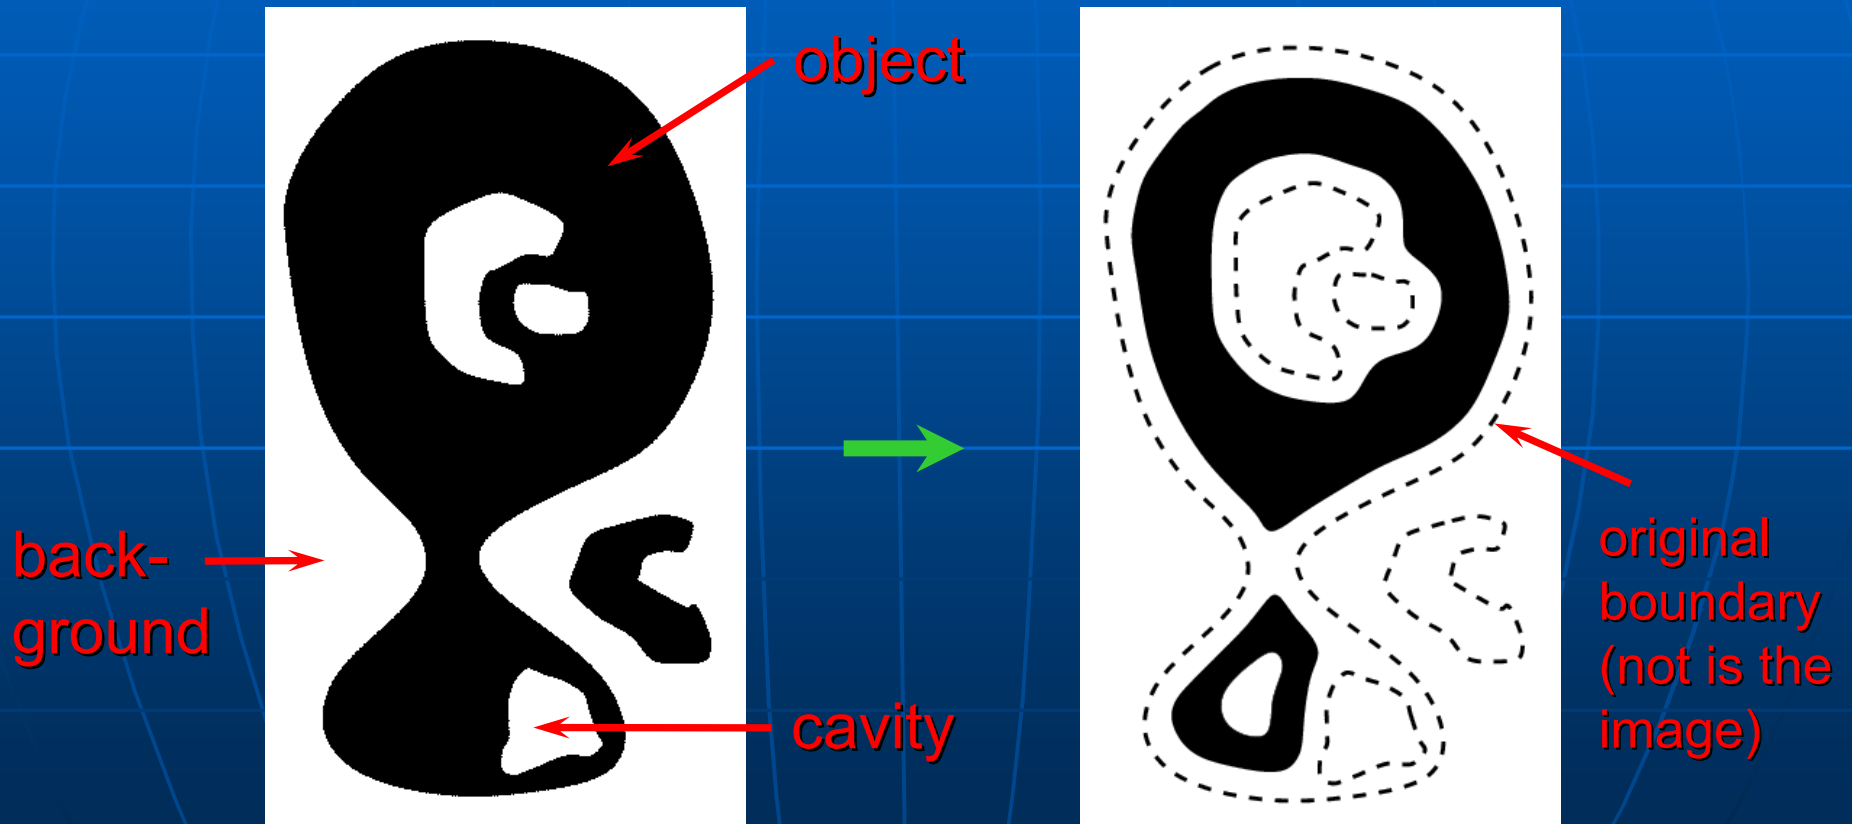

Topology in 3D



hole - a new concept

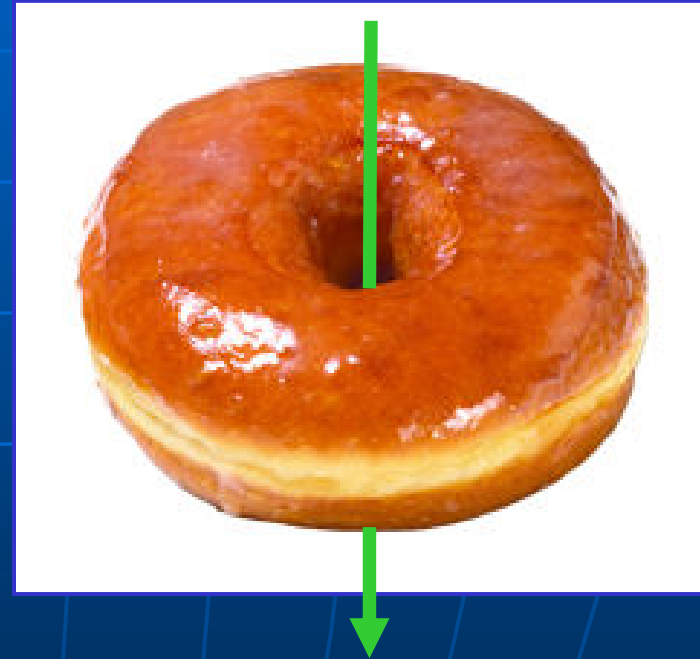

"A topologist is a man who does not know the difference between a coffee cup and a doughnut."

Topology preservation in 3D

(a counter example)

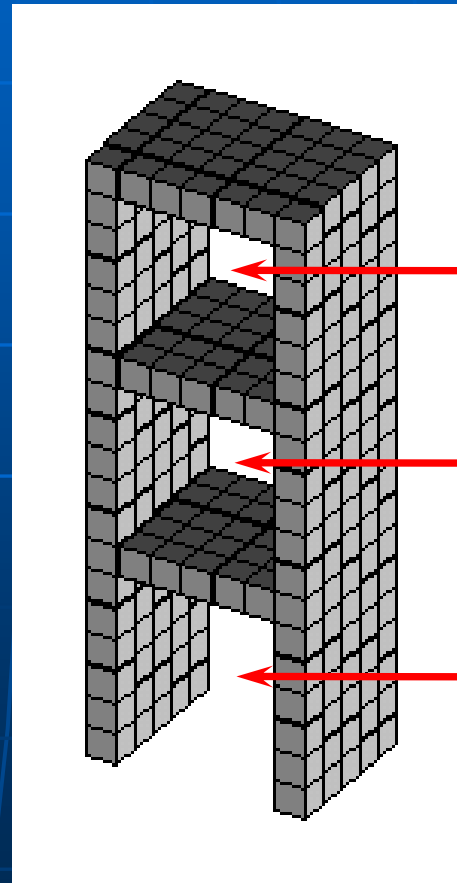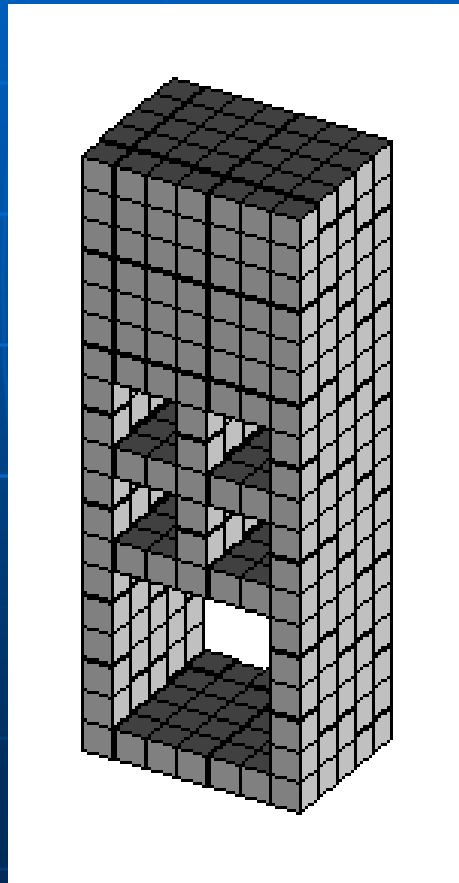

created

merged

destroyed

Shape preservation

"If you would know what the Lord God thinks of money, you have only to look at those to whom he gives it."

(Maurice Baring)

Shape preservation

"If you would know what the Lord God thinks of money, you have only to look at those to whom he gives it."

(Maurice Baring)


Example of 2D thinning

willm Sparkpatate




willm Sparkpatate

Example of 3D thinning

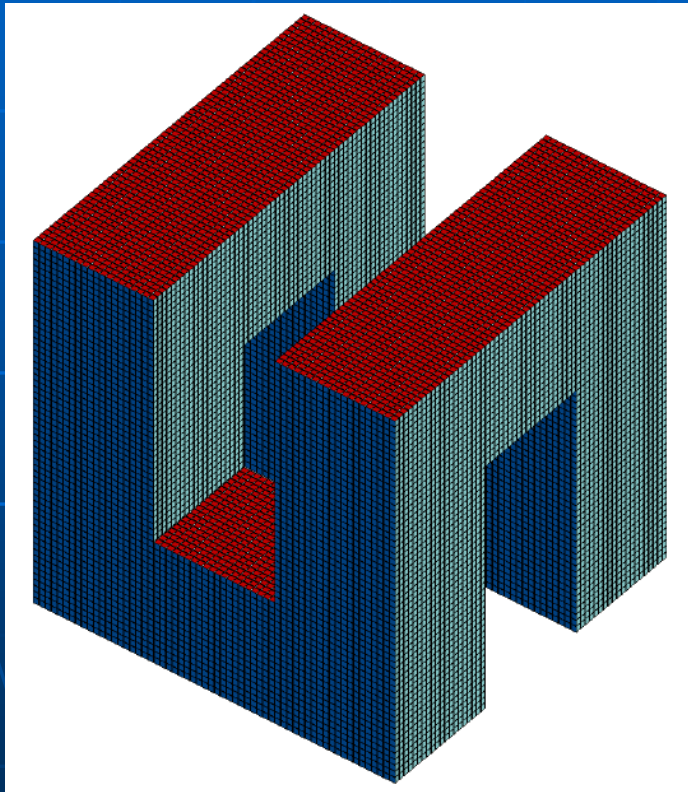

original object

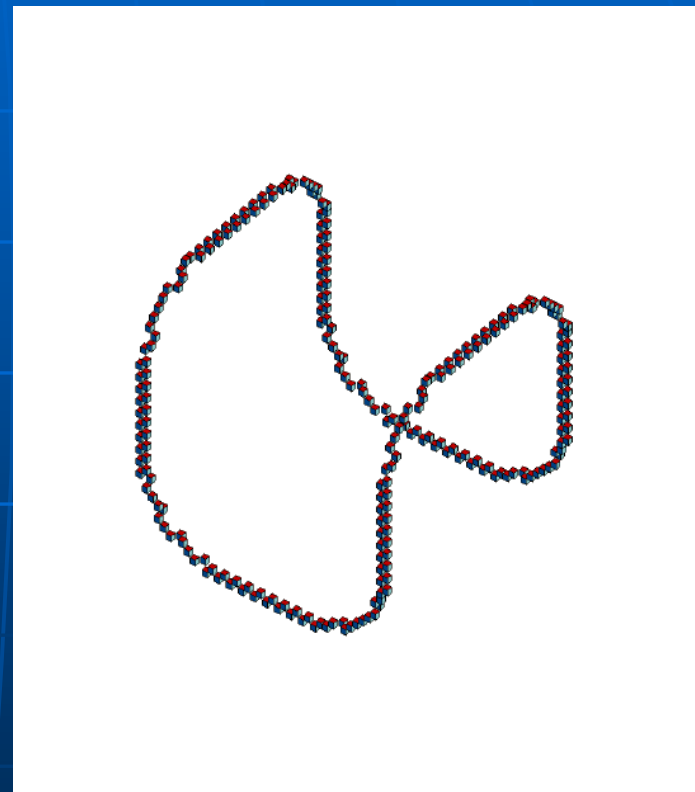

centerline

I prefer thinning since it ...

- allows direct centerline extraction in 3D,
- makes easy implementation possible,
- takes the least computational costs, and
- can be executed in parallel.

An 8-subiteration parallel 2D thinning algorithm

repeat
 for $i = S, SE, E, SW, N, NW, W, NE$ **do**
 simultaneous deletion of all points that
 match the i -th thinning mask
until no points are deleted

NW	N	NE
W	<i>p</i>	E
SW	S	SE

An 8-subiteration parallel 2D thinning algorithm

$i=1$ (deletion from direction S):


x	1	x
.	1	.
0	0	0

$i=2$ (deletion from direction SE):


.	1	.
1	1	0
.	0	0

(„x”: at least one of them is 1, „.”: don't care)


An 8-subiteration parallel 2D thinning algorithm

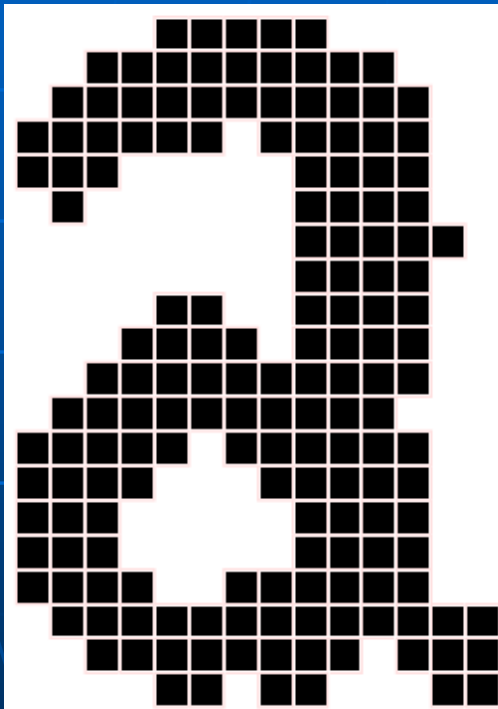

original object

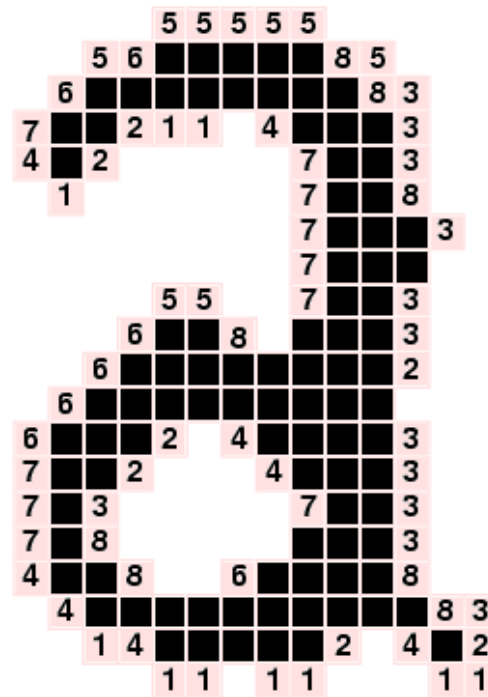

after one iteration

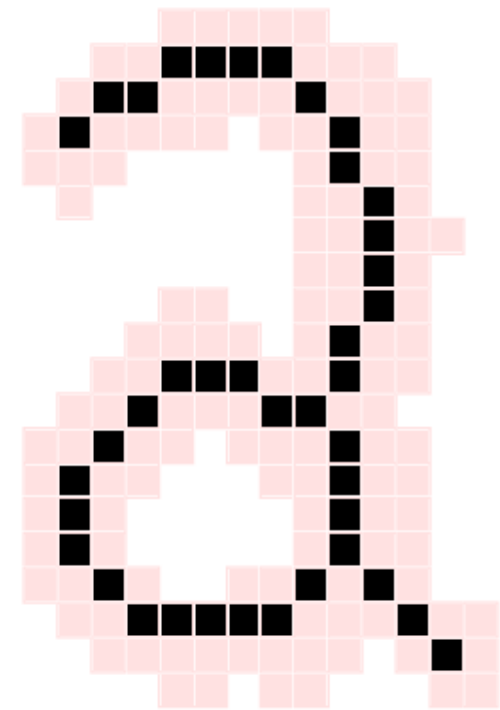

final

Requirements

- Geometrical:
The skeleton must be in the middle of the original object and must be invariant to translation, rotation, and scale change.
- Topological:
The skeleton must retain the topology of the original object.

Comparison

method	geometrical	topological
distance-based	yes	no
Voronoi-based	yes	yes
thinning	no	yes

Syllabus

- Shape
- Shape features
- Skeleton
- Skeletonization
- Applications

Applications in 2D

- „exotic” character recognition
- recognition of handwritten text
- signature verification
- fingerprint and palmprint recognition
- raster-to-vector-conversion
- ...

Exotic character recognition

佐

藤

浩

一

佐

藤



浩

一


characters of a Japanese signature

K. Ueda


Signature verification

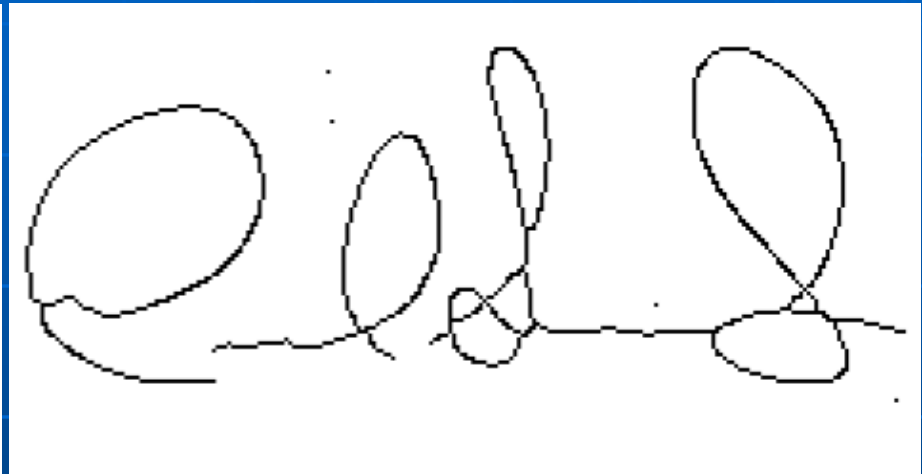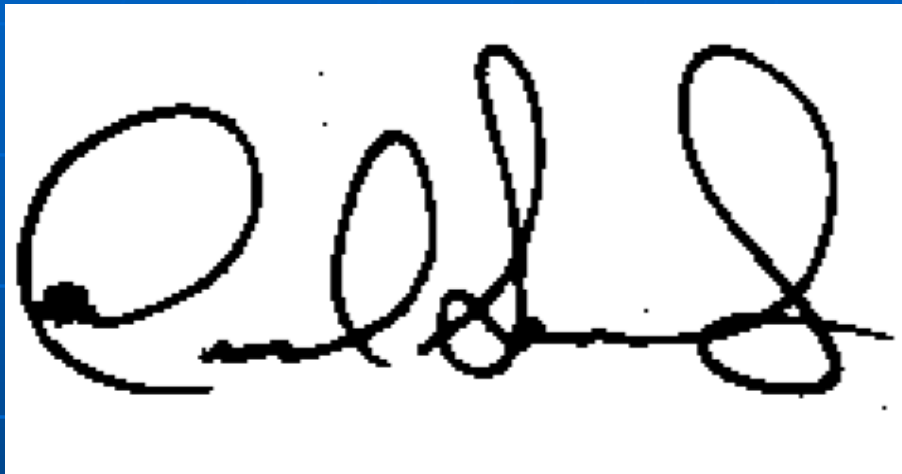


signature before and
after skeletonization



detected line-end points
and branch-points

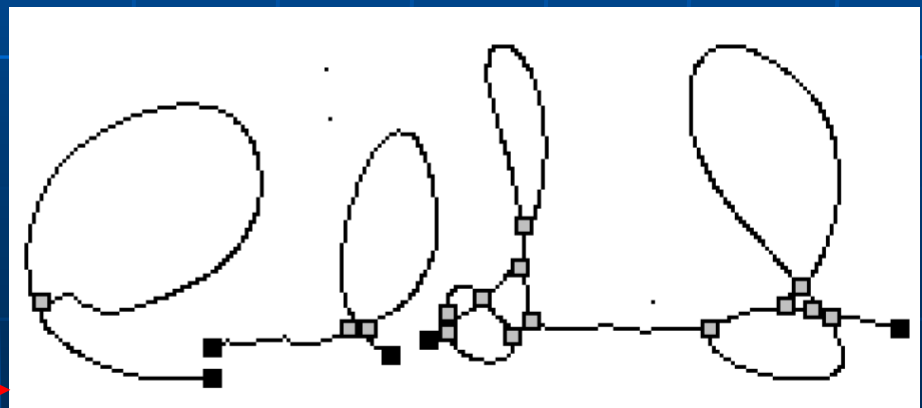


Fingerprint verification

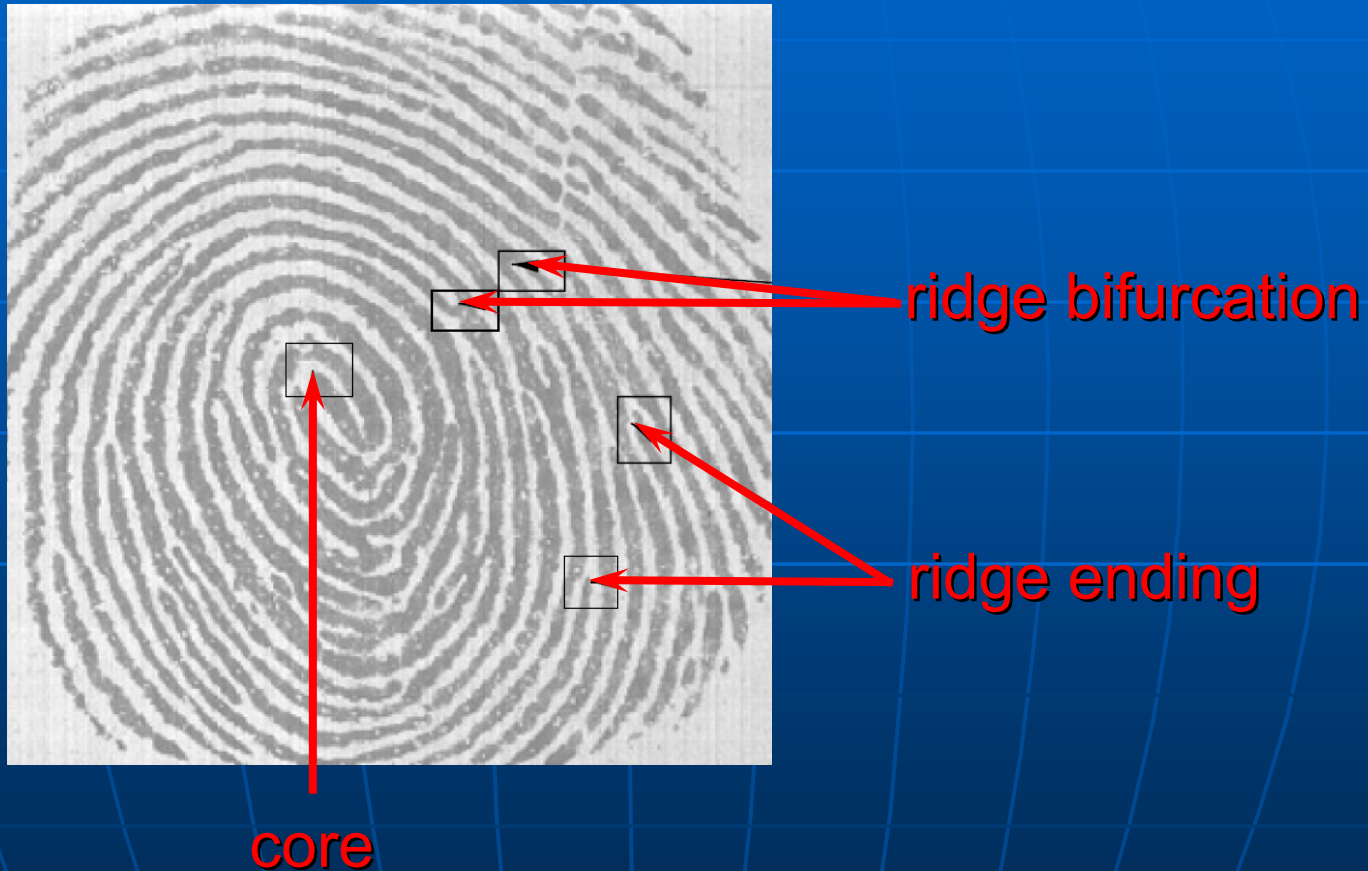


features in fingerprints

Fingerprint verification

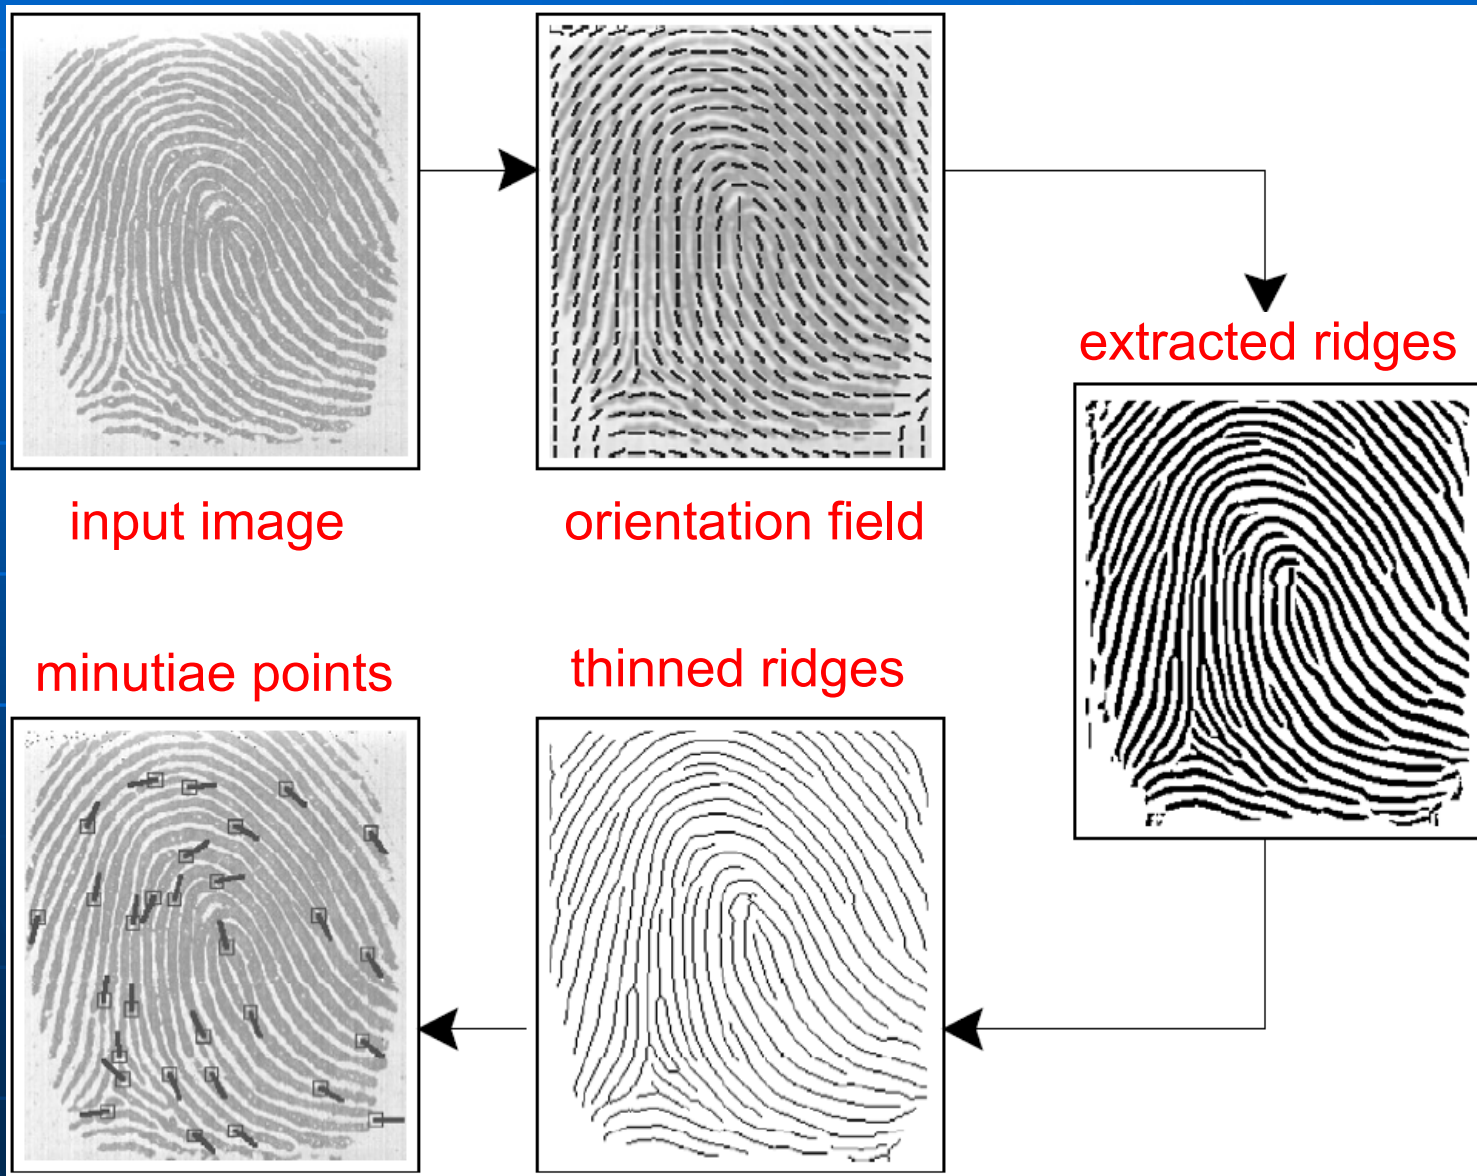

the
process


Palmpoint verification

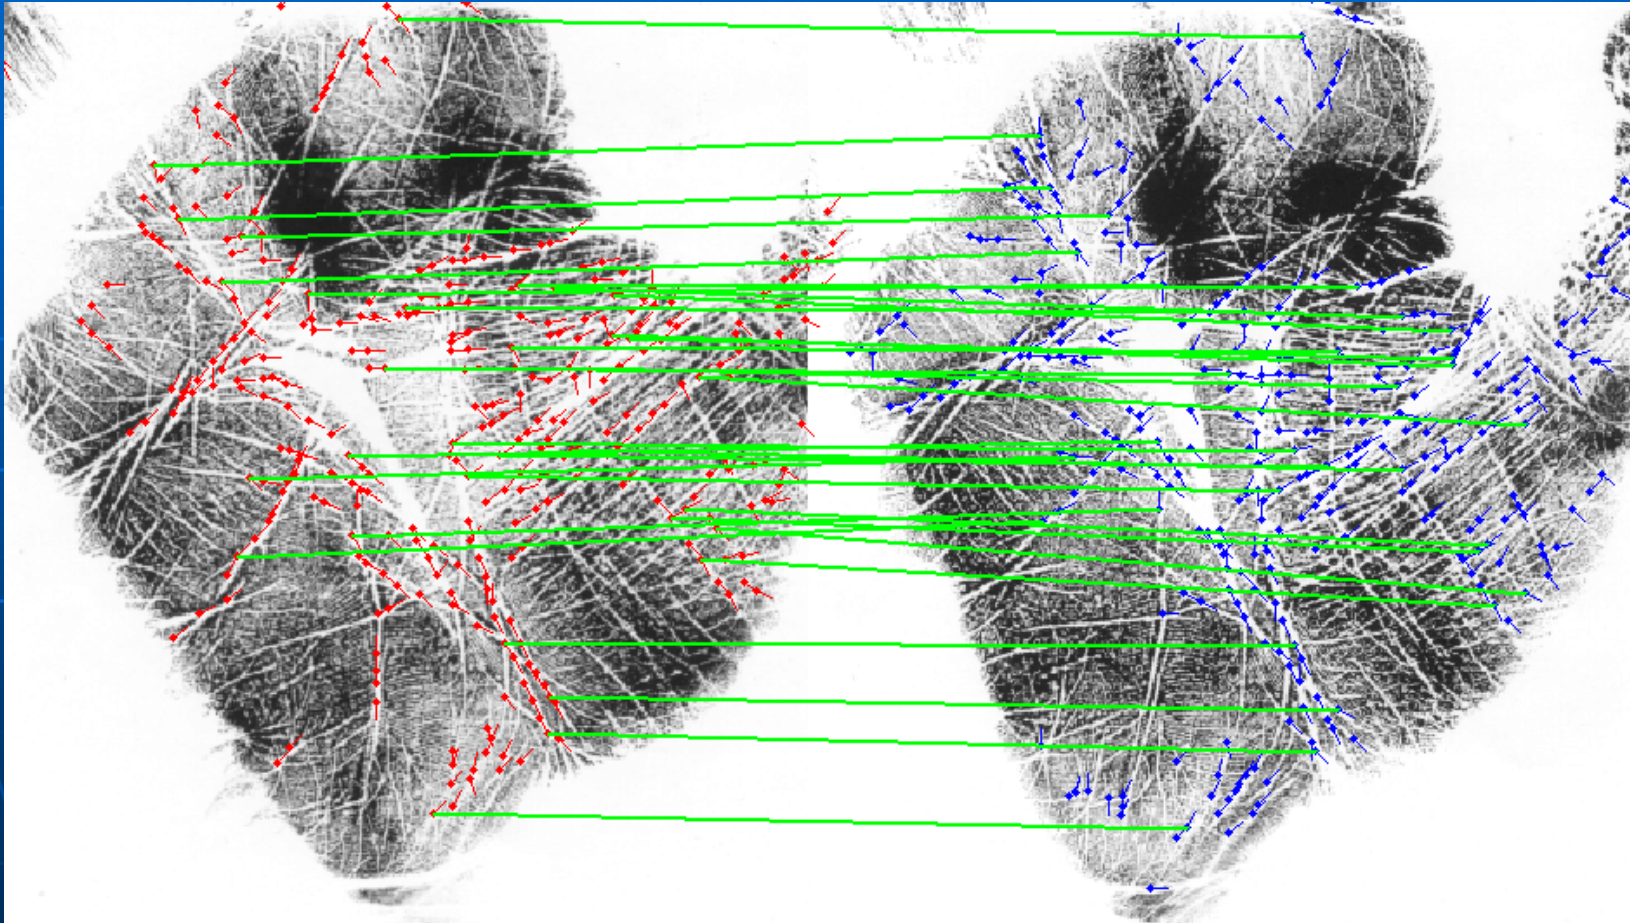

matching extracted features


N. Duta

Raster-to-vector conversion

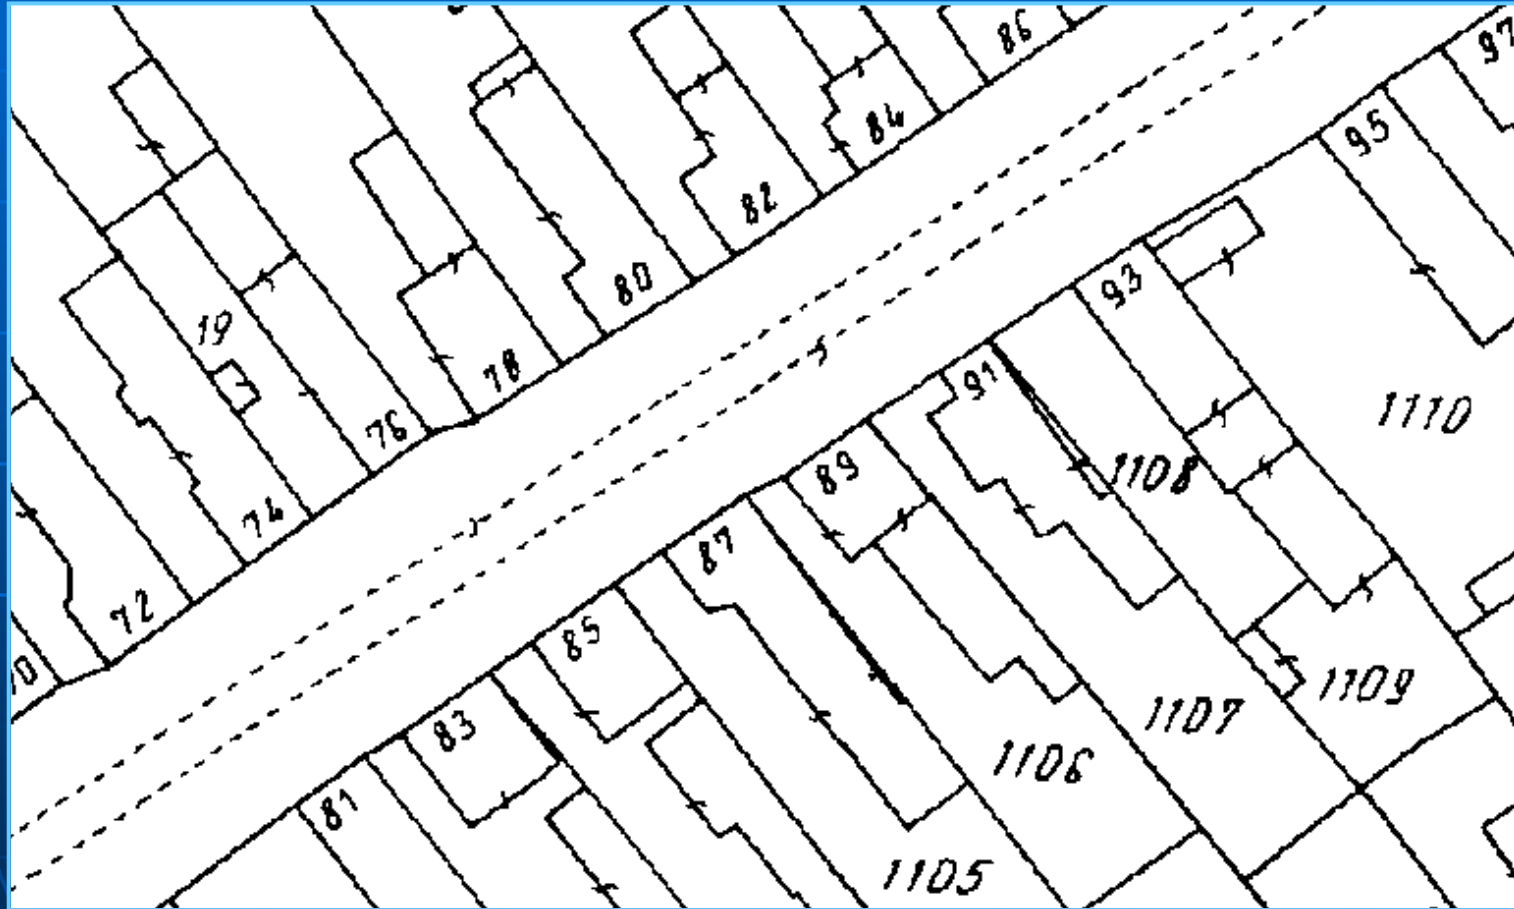

scanned map


Raster-to-vector conversion

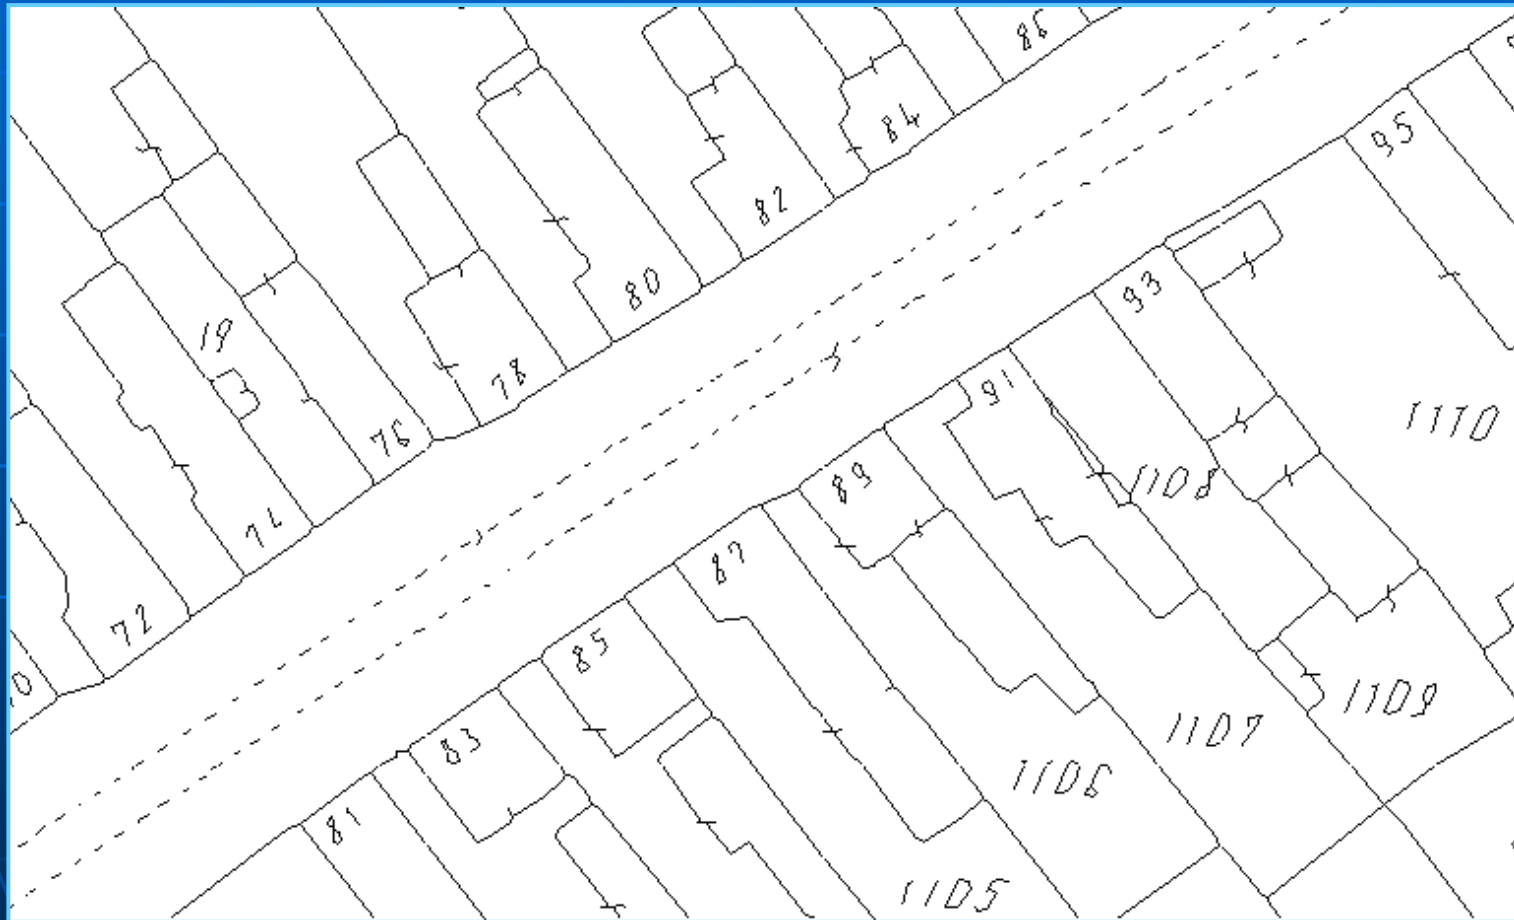

„raw” vector image after skeletonization

Katona E.

Raster-to-vector conversion

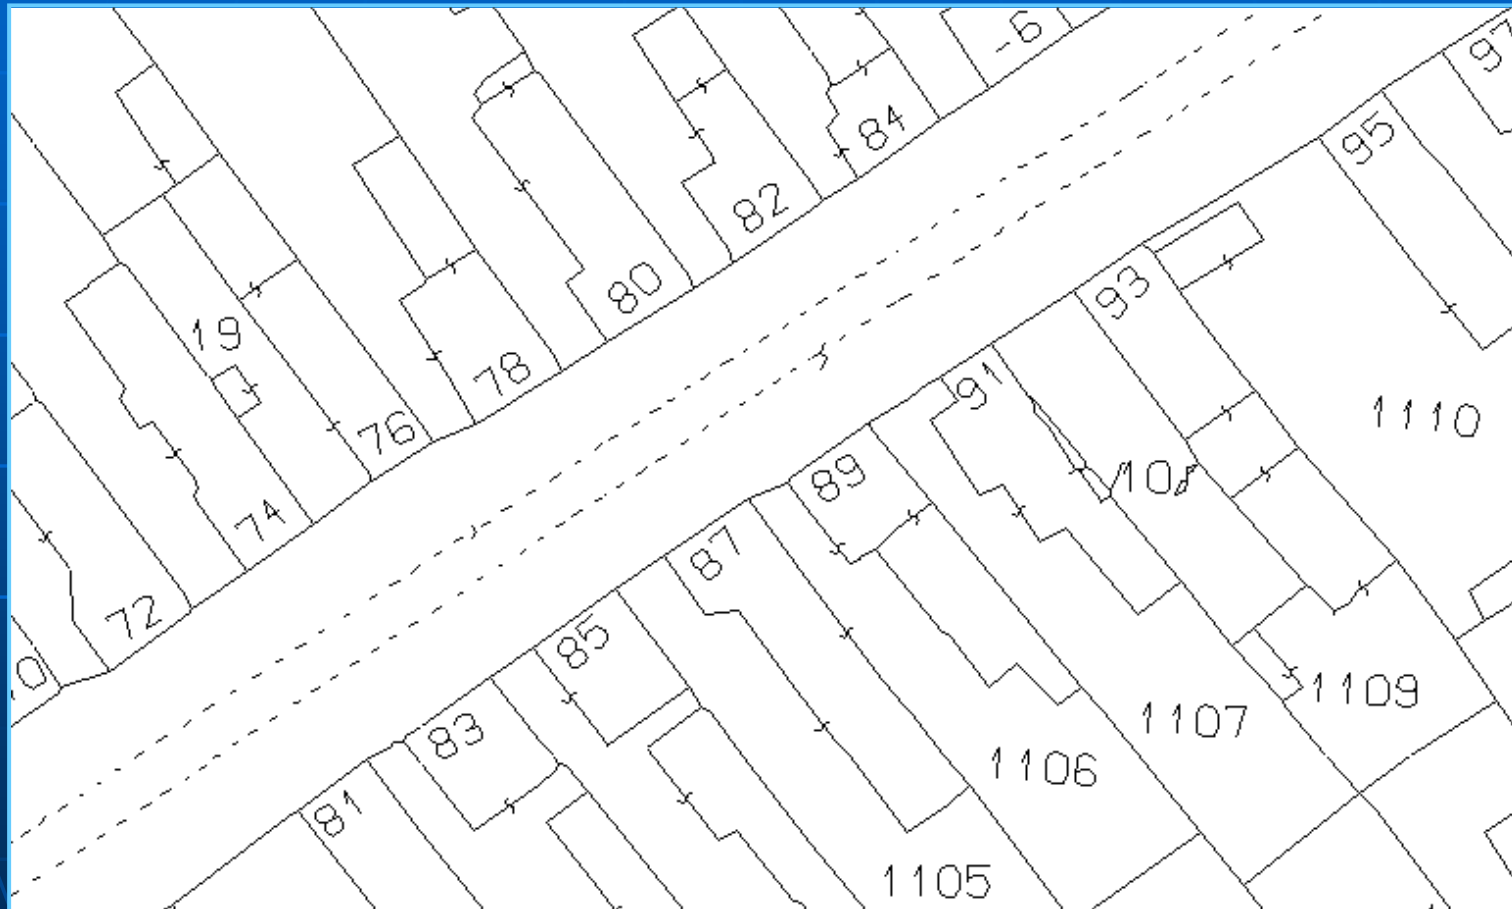


corrected vector image

Katona E.

Applications in 3D


There are some frequently used 3D medical scanners (e.g., CT, MR, SPECT, PET), therefore, applications in medical image processing are mentioned.

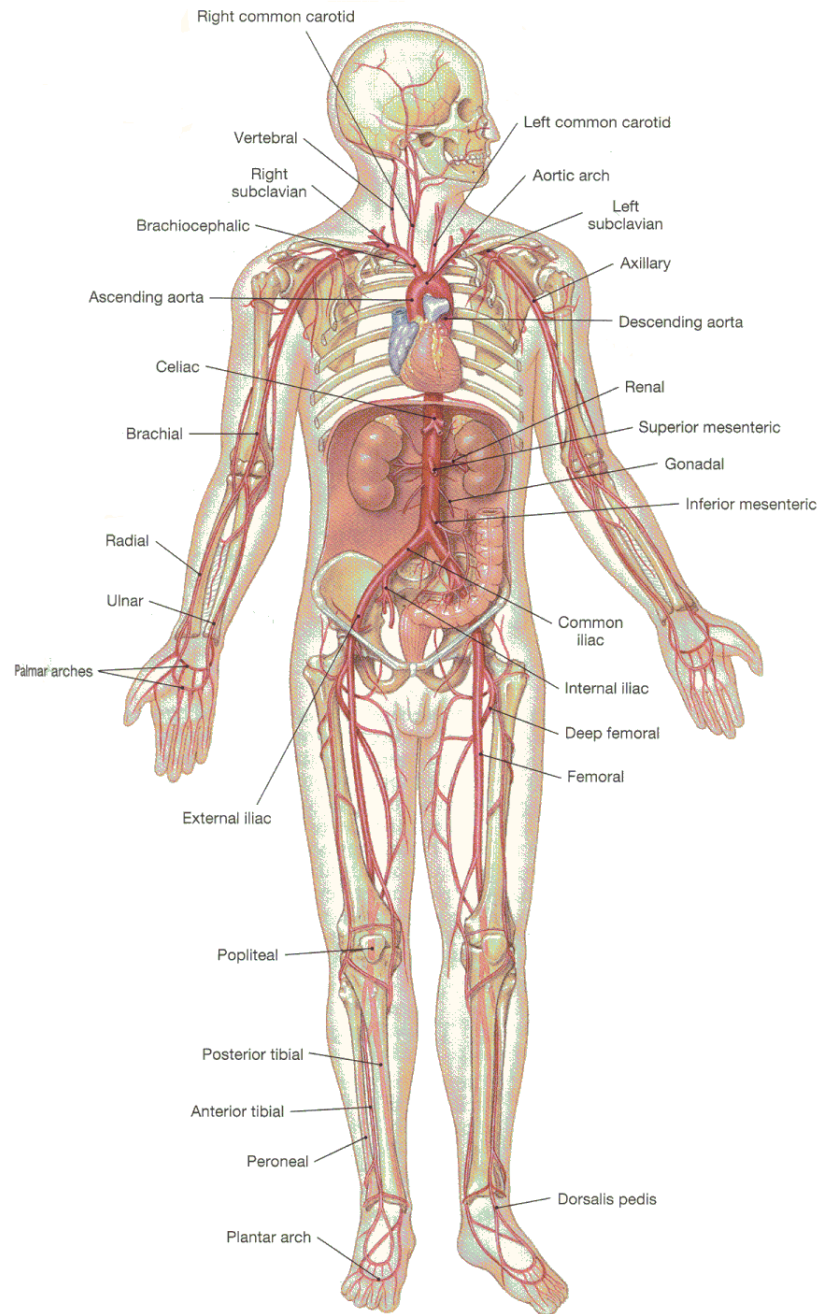

There are a lots of tubular structures (e.g., blood vessels, airways) in the human body, therefore, centerline extraction is fairly important.


Applications based on centerline extraction

E. Sorantin
et al.

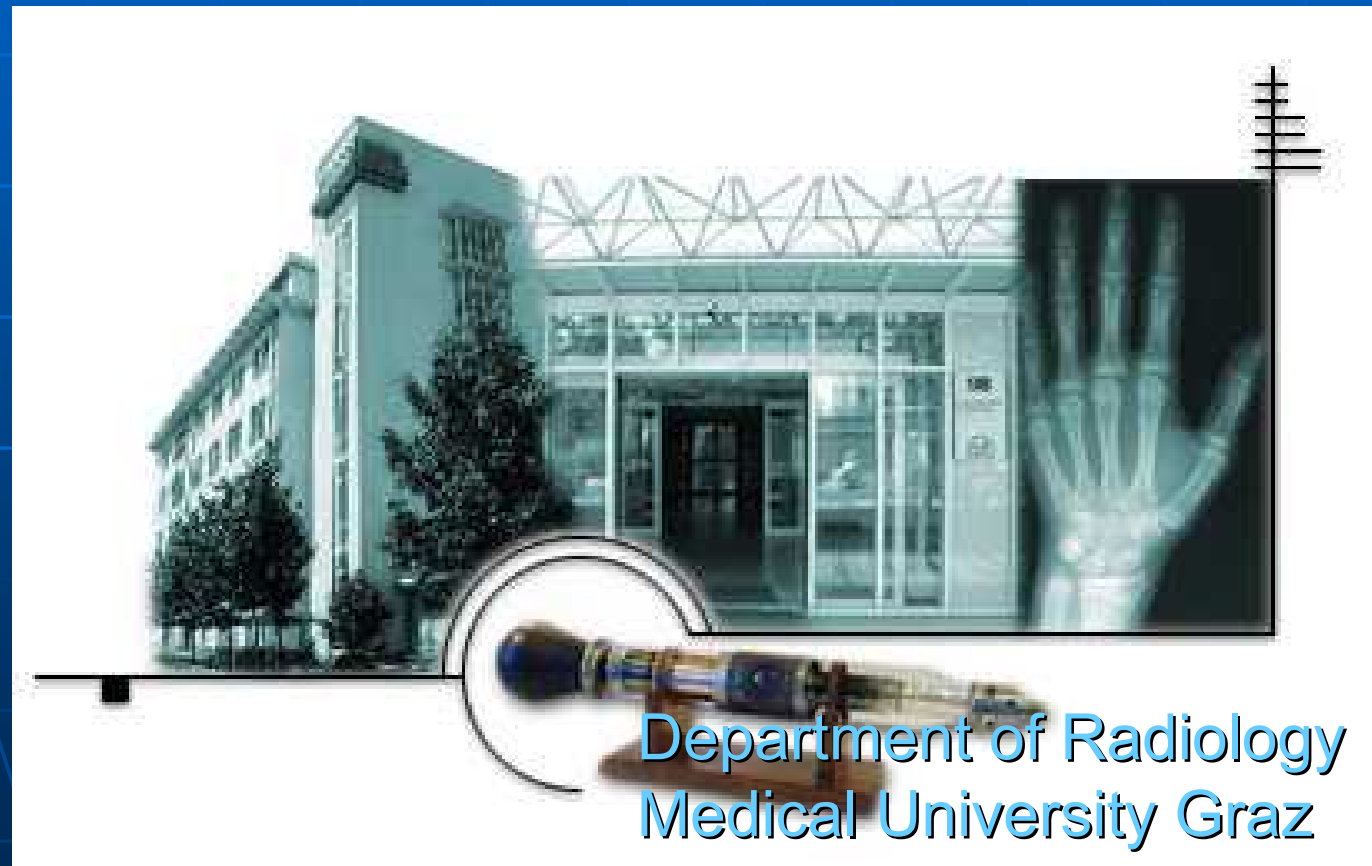


Department of Radiology
Medical University Graz

Blood vessel (infra-renal aortic aneurysms)

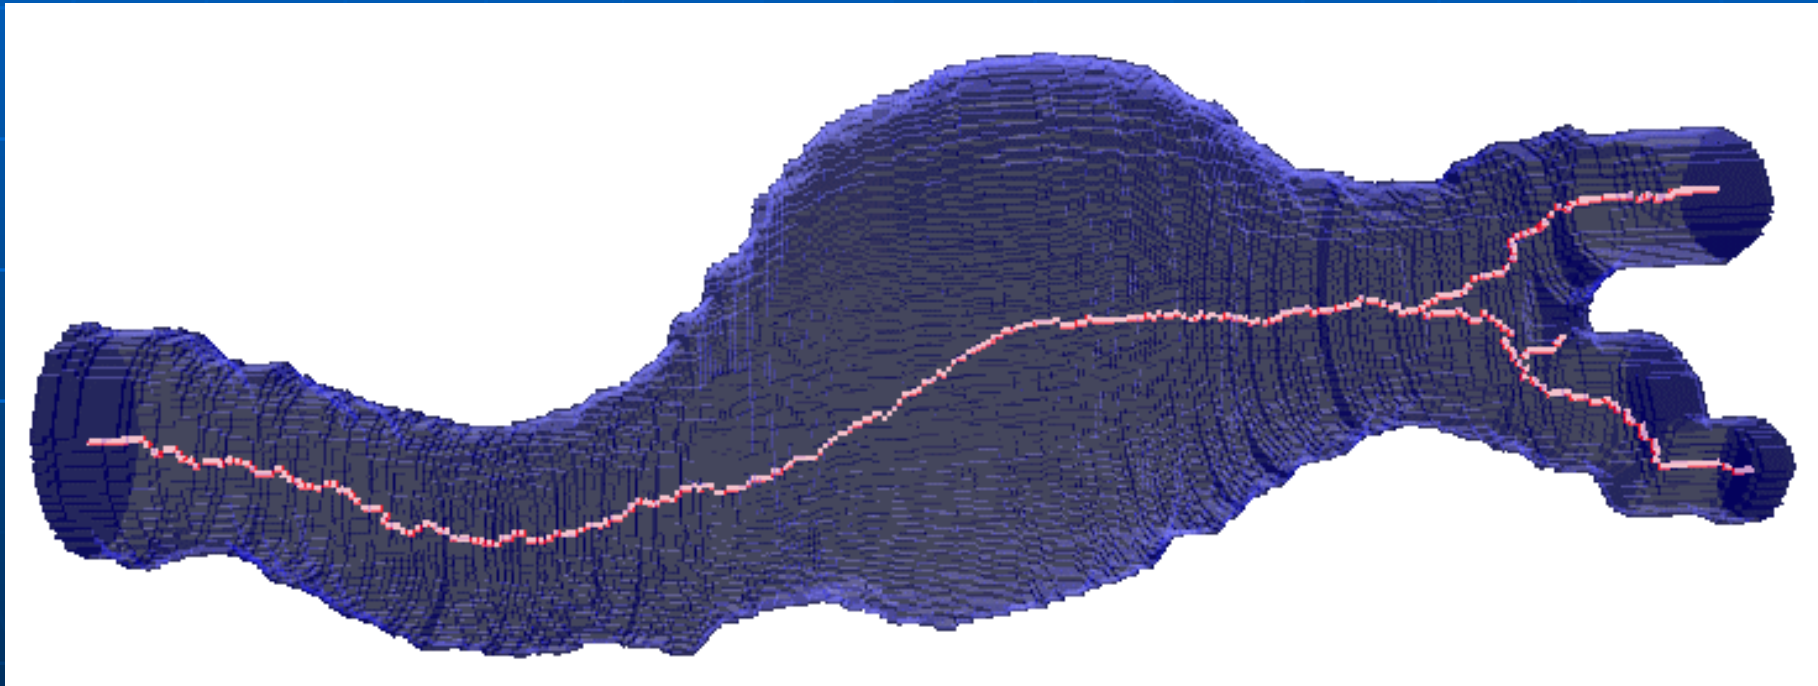


Airway (tracheal stenosis)

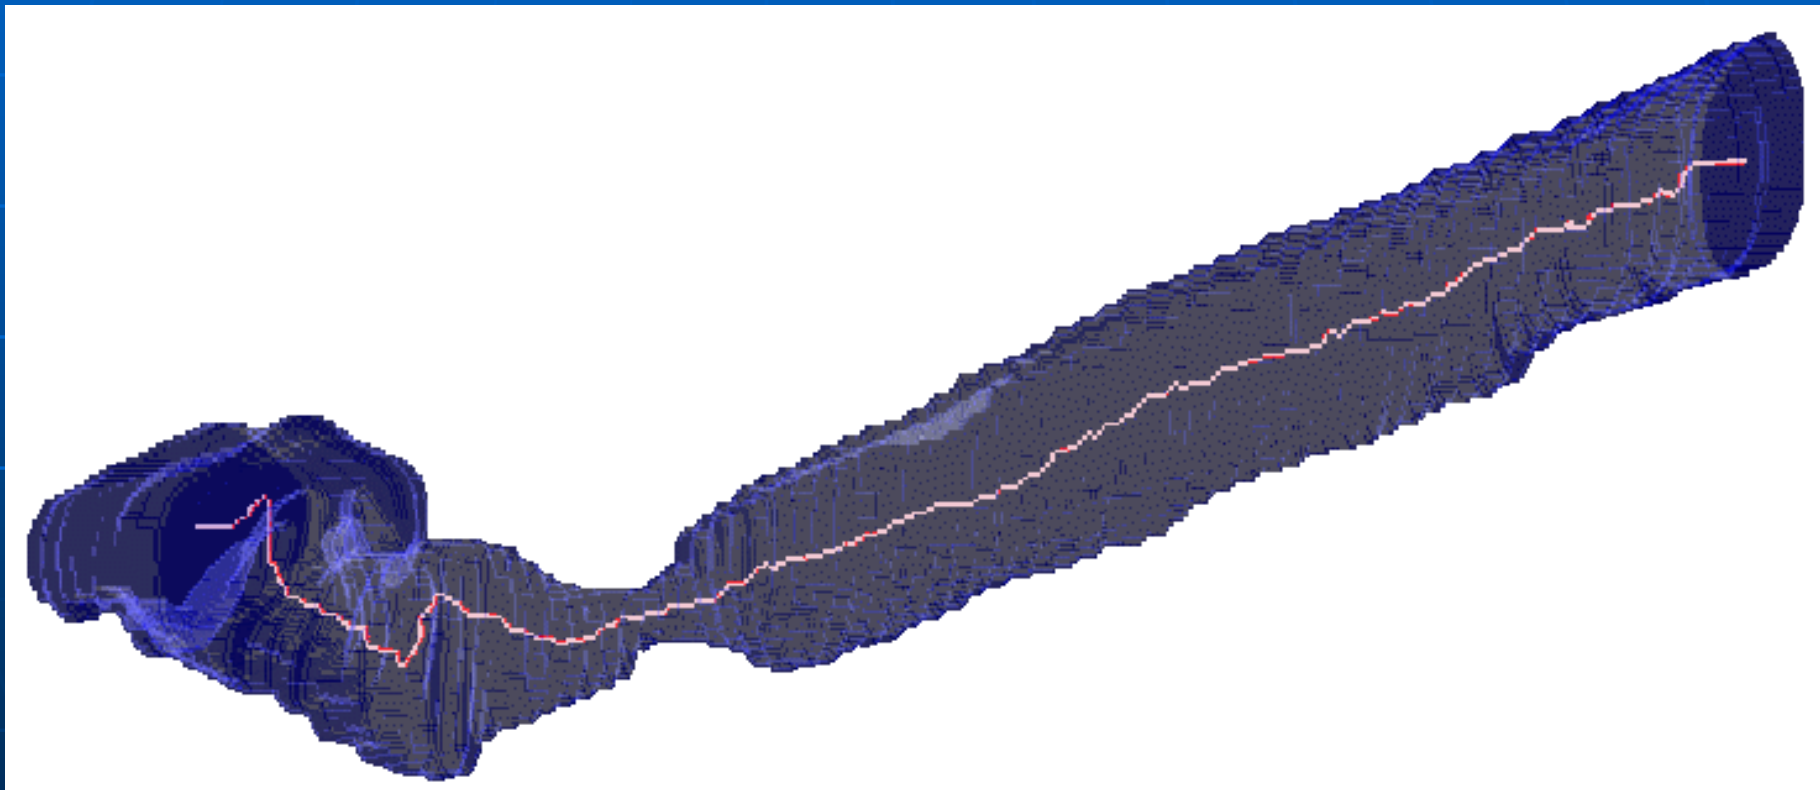

E. Sorantin et al.

Virtual colonoscopy

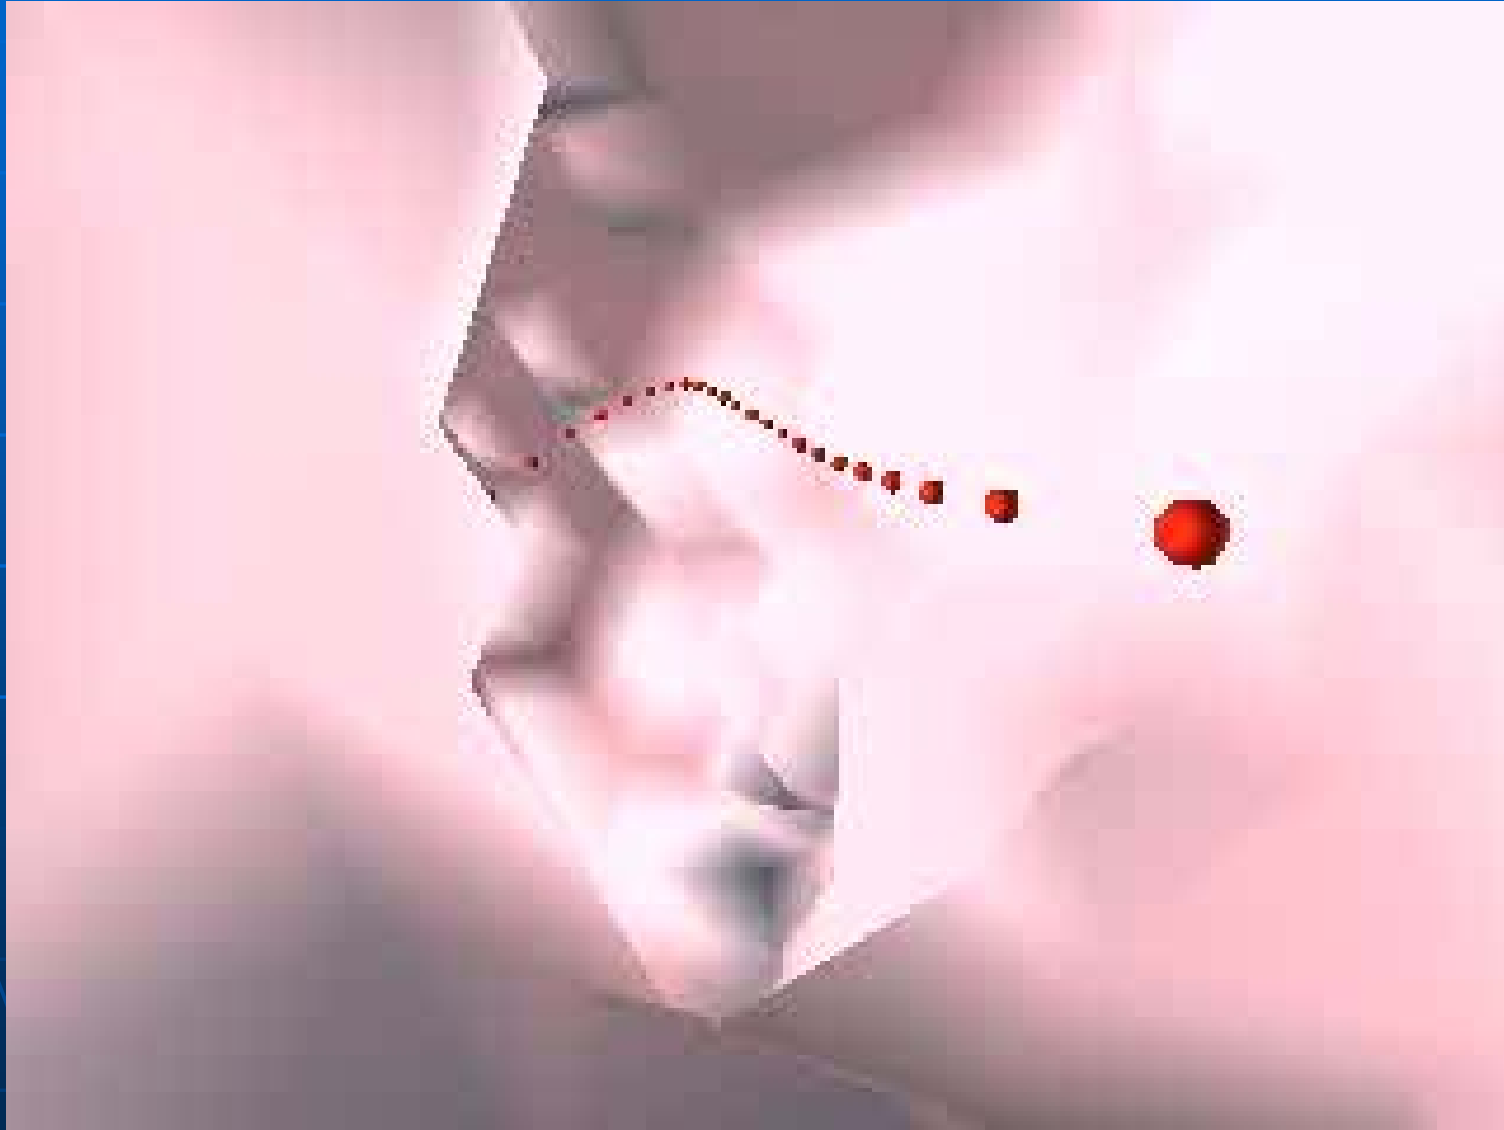

A. Villanova et al.


Quantitative analysis of intrathoracic airway trees

Kálmán Palágyi
Juerg Tschirren
Milan Sonka
Eric A. Hoffman



The University of Iowa
College of Engineering Imaging Group

Images

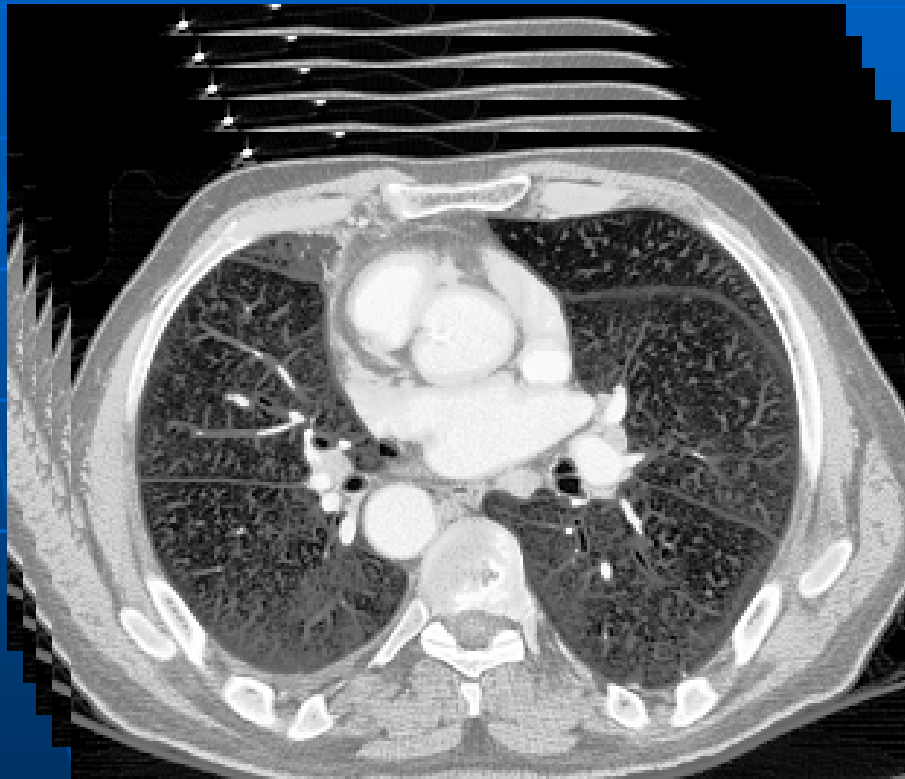

Multi-detector
Row Spiral CT

512 x 512 voxels


500 – 600 slices


0.65 x 0.65 x 0.6 mm³
(almost isotropic)

Lung segmentation



Centerlines

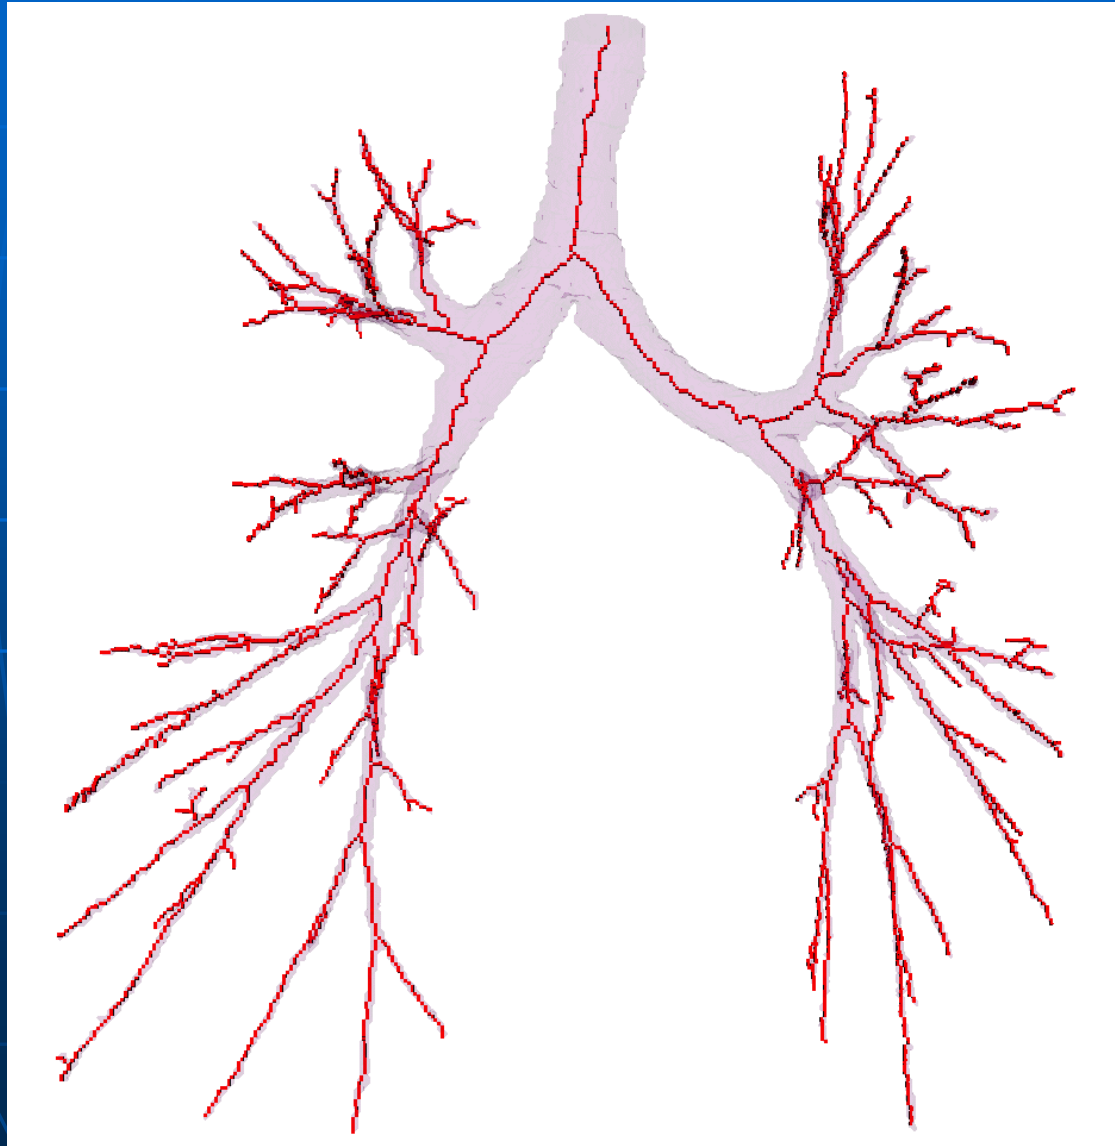


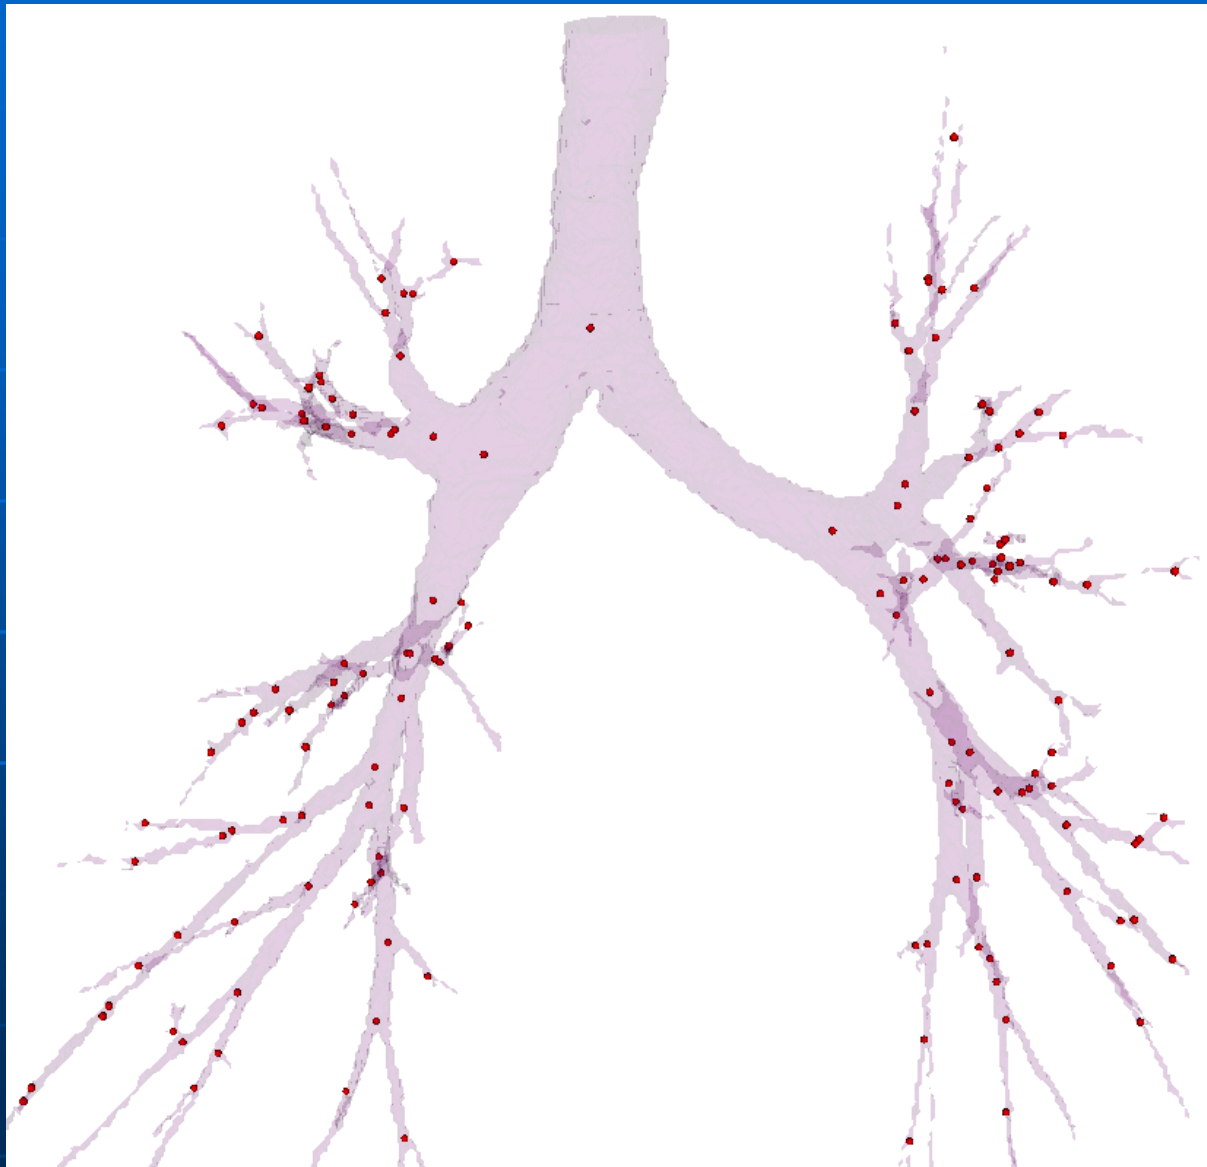


detected
branch-points




Branch partitioning

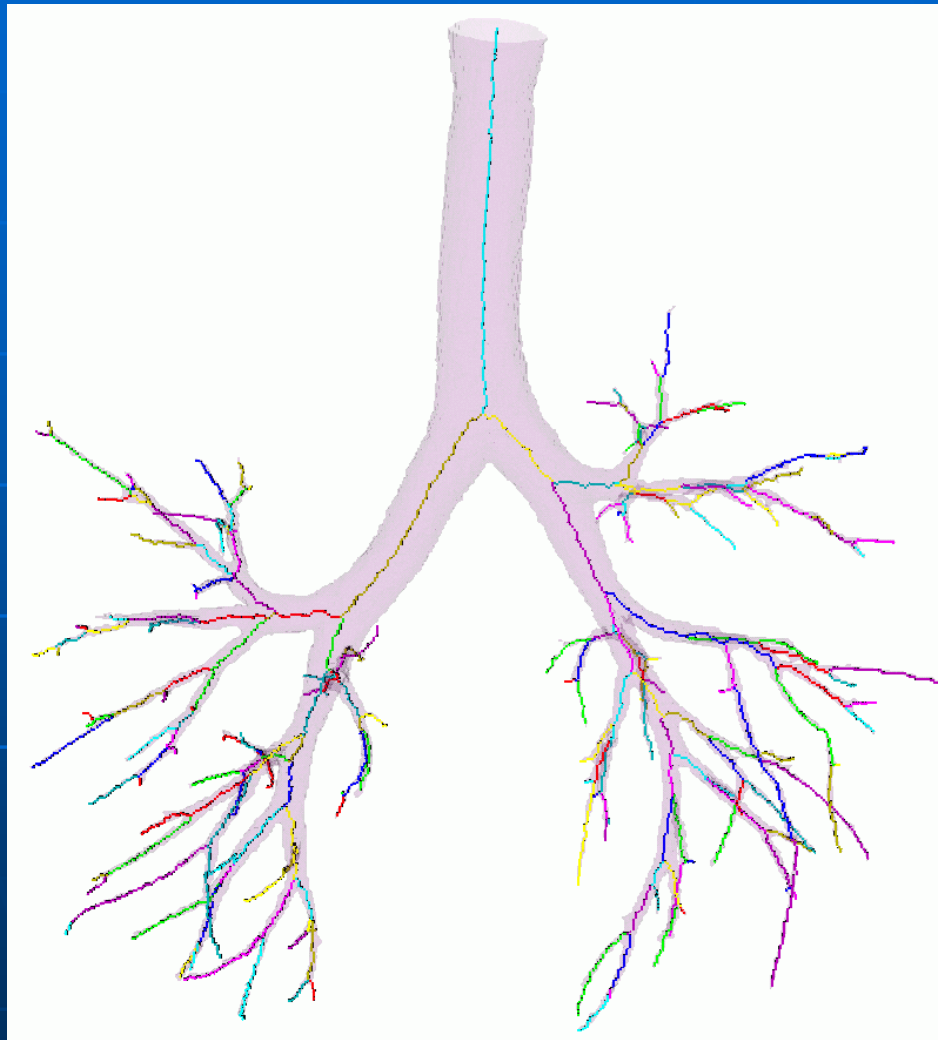


centerline labeling

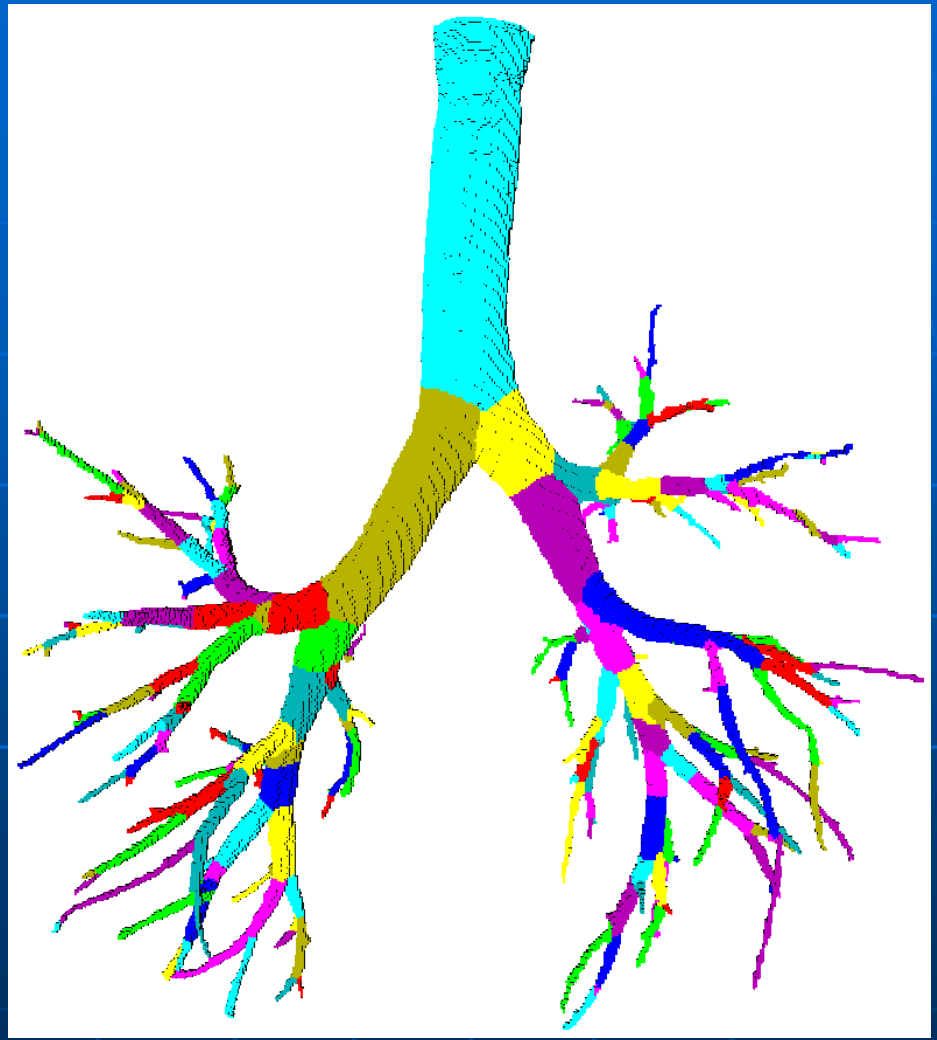

label propagation

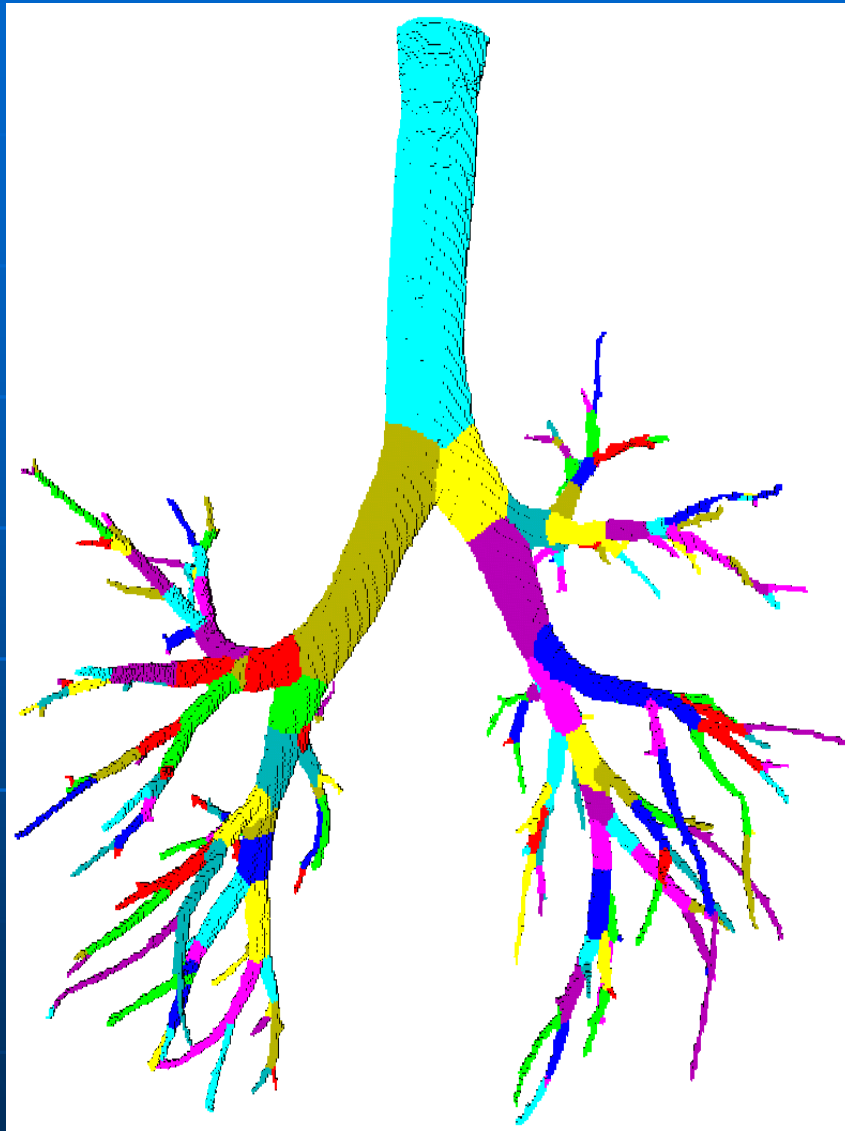

labeled tree

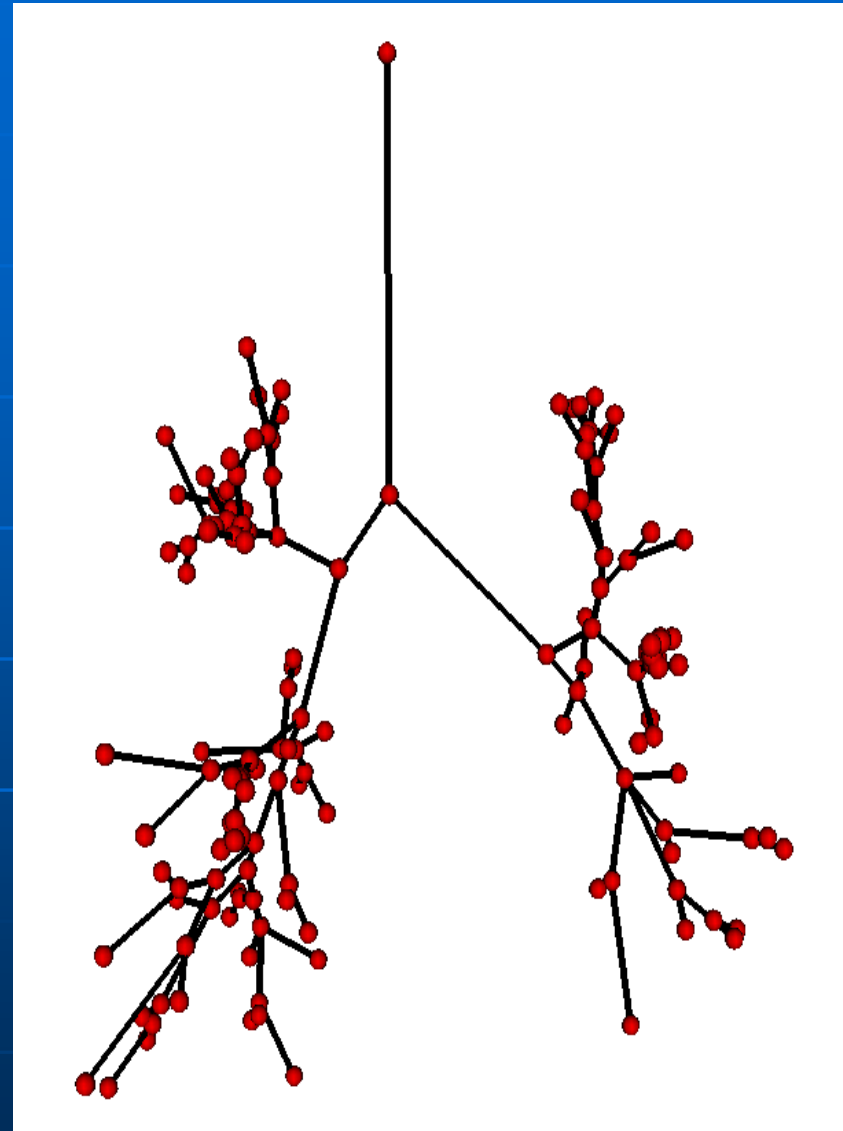


formal tree (in XML)

Quantitative indices for tree branches


- length (Euclidean distance between the parent and the child branch points)
- volume (volume of all voxels belonging to the branch)
- surface area (surface area of all boundary voxels belonging to the branch)
- average diameter (assuming cylindrical segments)

The entire process


segmented
tree

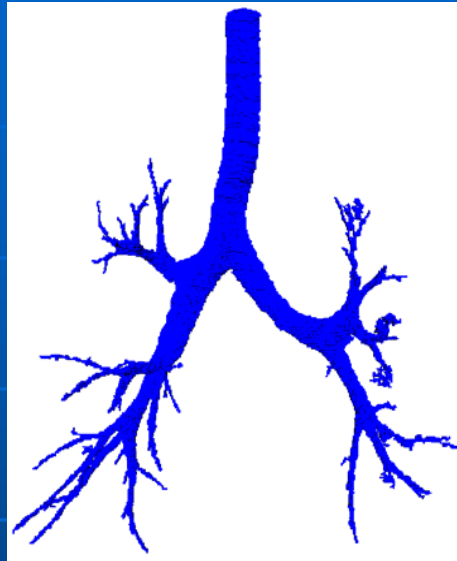


pruned
centerlines

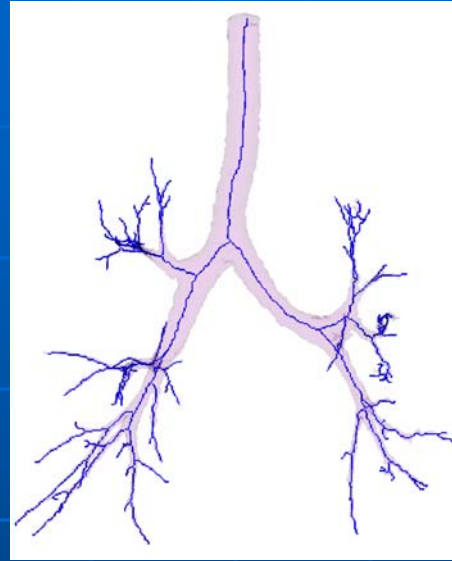


labeled
tree

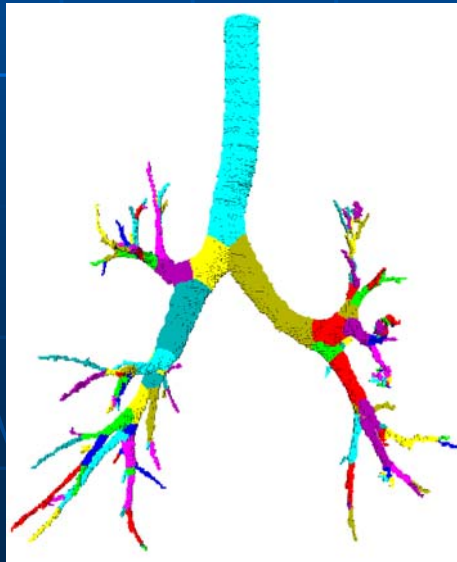

formal tree

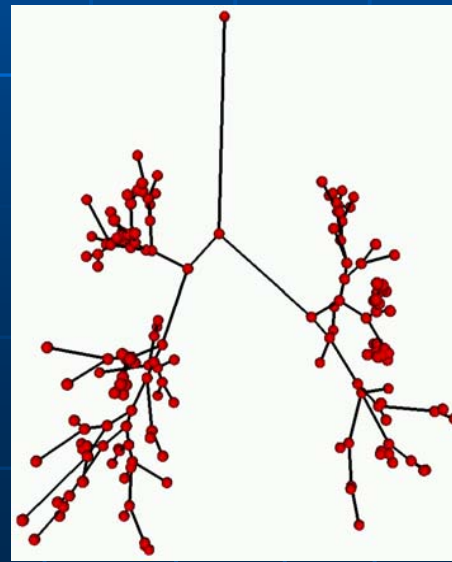


Matching

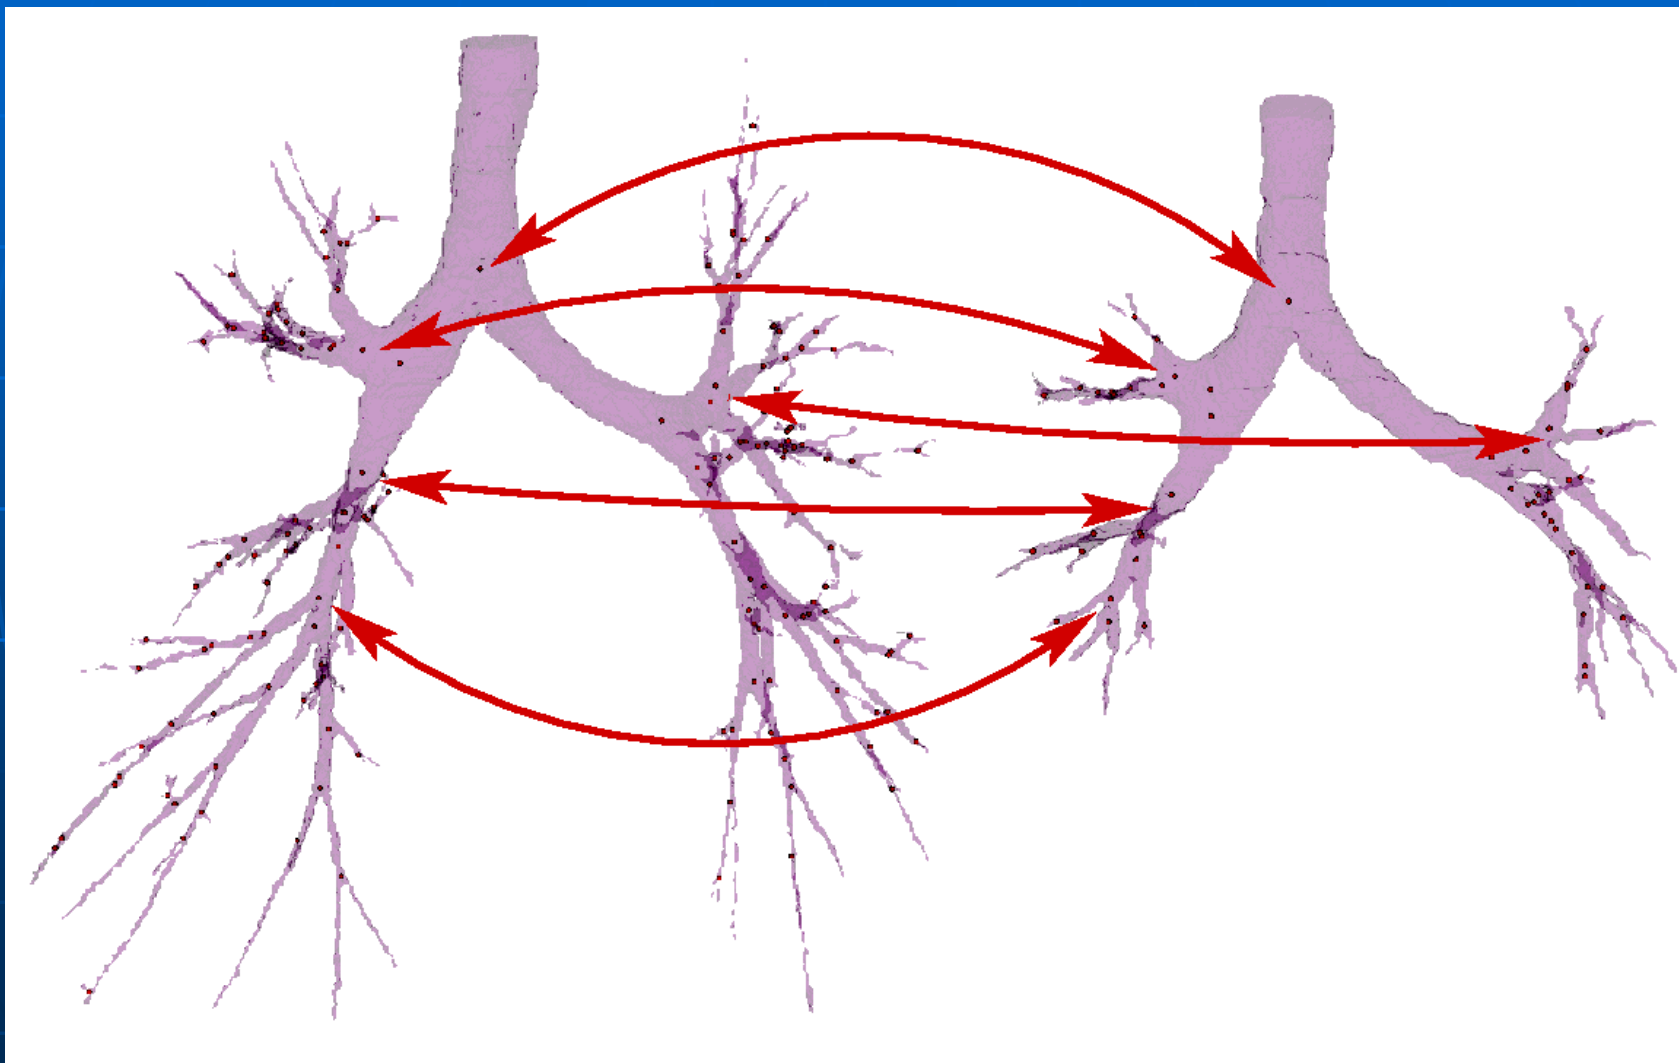





FRC

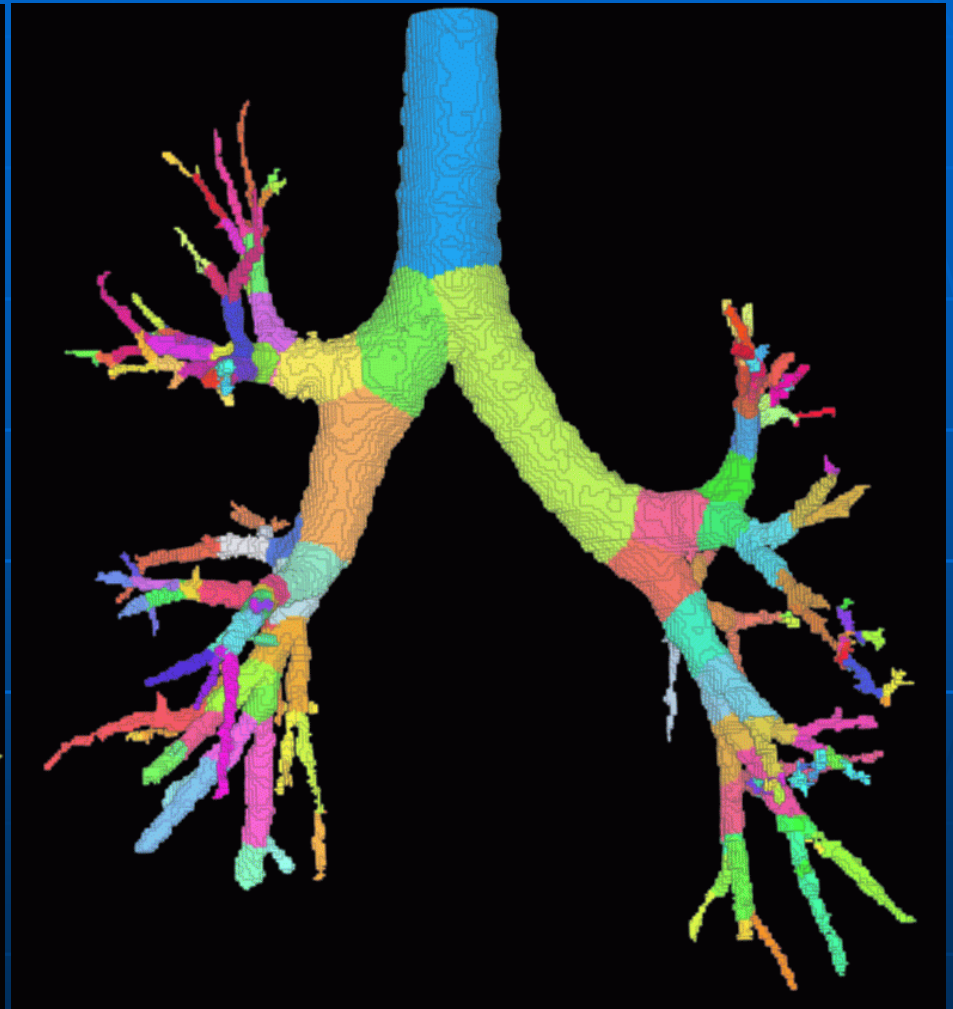

TLC

Anatomical labeling

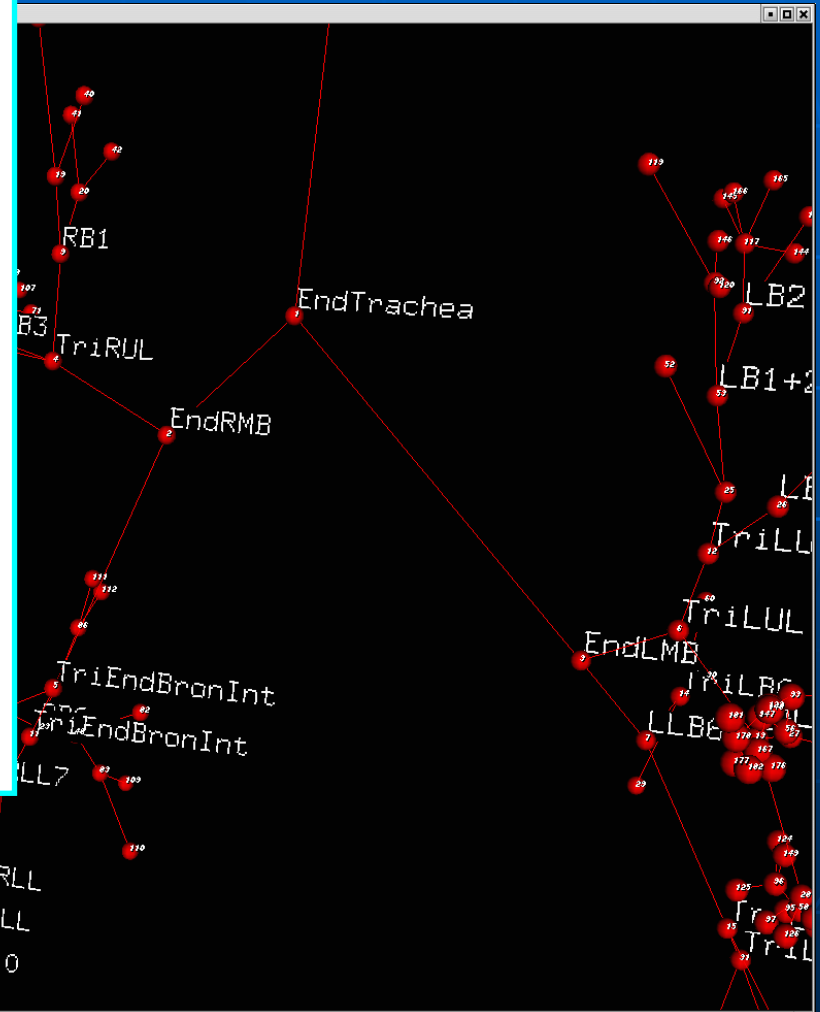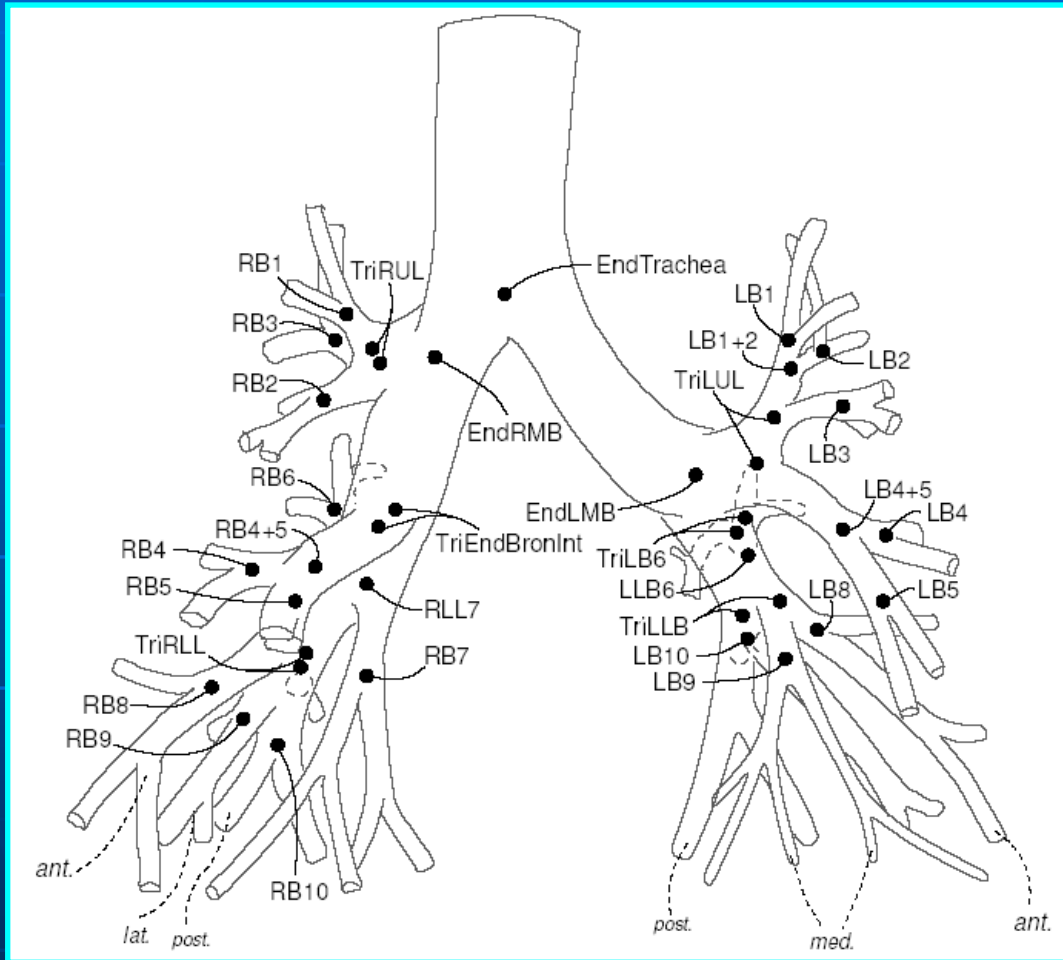



Bye